Machinery SIP CATALOGUE



WINTER EDITION | OCTOBER 2025 - JANUARY 2026

POWER







SEE PAGES 139-150



& TOOLS





BOOSTING & CHARGING P51-59





P60 - P71 **CLEANING**









GENERATORS













WATER PUMPS





WOOD WORKING

Welcome to the Winter 2025/26 edition!

SIP Industrial Products Limited is a flagship supplier of high-quality equipment and machinery to the ever-growing engineering, construction, automotive and agricultural marketplaces.

As an ISO 9001 approved machinery specialist, SIP are ever-committed to offering quality, value and choice, ensuring our users have the right product for the task in hand.

As part of that, we are proud to launch our **NEW Product Selector Tool** designed to help you find the most suitable compressor for your needs, as well as the next wave of product solutions, including our **NEW Industrial Pillar Drills!**



NEW PRODUCT SELECTOR

NEED HELP CHOOSING YOUR IDEAL COMPRESSOR?









NEW PRODUCTS

WINNTEC® LOW PROFILE JACK STANDS

Engineered for maximum stability of low clearance vehicles, our latest low-profile jack stand features an extra-large base and foot pads, ensuring a secure and reliable hold under load.







PAGE 38
FOR MORE INFO

ADJUSTABLE ROLLER TABLE STAND

Built for metalwork and woodworking workshops, this versatile roller table has a high 400kg capacity and features a rigid and sturdy steel construction, designed to withstand day-to-day use in professional environments.



PRICE








NEW PRODUCTS



We support & make life easy for our users

SIP WEBSITE Everything you need in one place

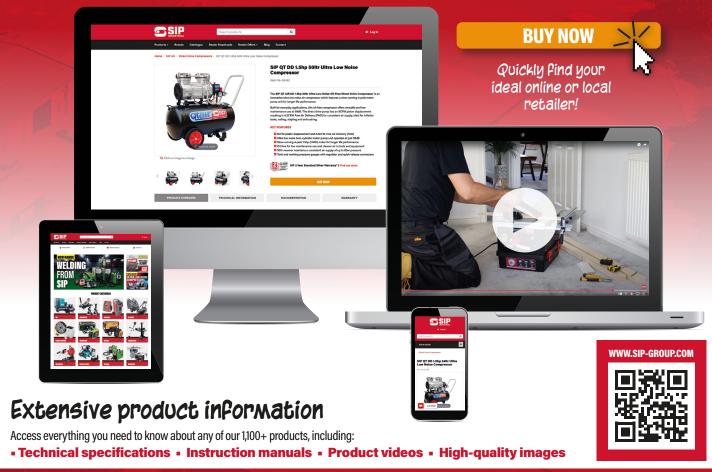

SIP Warranty Scheme



With a dedicated service centre at head office and service engineers across the UK and Ireland, SIP are committed to providing you with the optimum support to minimise any

All SIP products* come with a 2 year warranty as standard. We also offer a 3 year warranty on our premium WINNTEC® and NARDI ranges.

To activate the second and third years of these warranty schemes, please ensure that you register your purchase.

*Excludes accessories & consumables



Technical & Aftersales Support

Our extensive Technical, Service Engineer & Customer Service teams are on hand to support with:







SERVICE PLANS

We offer tailored Service Plans which run for a minimum of 12 months, and can be extended to 36 months or 60 months. Contact us for more information:

Tel: 01509 500 400 Email: customerservice@sip-group.com



Market-leading support for our **distributors**

Are you a distributor of SIP products? If so, great news! We're here to provide you with a wealth of FREE, customisable materials for your promotional activity!

B2B WEBSITE PORTAL





MULTI BUY PRICE TIERS FOR STOCKISTS!



ACCESS LATEST OFFERS



MARKETING SUPPORT

As an SIP dealer, you have access to a wealth of marketing assets that can be tailored to include your logo, pricing and contact details!

PRINT & POS

- Catalogues
- Display POS
- Bespoke flyers!



DIGITAL

- · Listings data, images
- Product videos
- Web banners
- Social media graphics



Don't miss out, request your assets today! marketing@sip-group.com



At SIP we pride ourselves on our friendly & efficient customer service, which is reflected in our TrustPilot score.

PRODUCT FINDER

Air Compressors & Tools	
Direct Drive Compressors	8 - 15
Portable & Space Saving Compressors	16 - 19
Belt Drive Compressors	19 - 25
Industrial Compressors	26 - 31
Air Tools & Accessories	32 - 36
Automotive & Hydraulics	
WINNTEC® Premium Hydraulics	37 - 40
Lifting & Garage Equipment	41 - 49
Induction Heaters	50
Chargers, Boosters, Starters	
Capacitor Boosters	52 - 53
AGM Boosters	54 - 55
Chargers, Starter Chargers & Battery Testers	56 - 59
Cleaning	
Electric Pressure Washers	60 - 65
Petrol & Diesel Pressure Washers	66 - 69
Valeting & Floor Scrubbers	70 - 71
Climate Control	
Fans, Ventilators & Air Conditioners	72 - 75
Generators	
Petrol Inverter Generators	76
Petrol & Diesel Powered Generators	77 - 79
Heating	
Diesel & Propane Heaters	80 - 85
Infrared Diesel Heaters	86 - 89
Electric Heaters	90 - 91
Landscaping	
Landscaping Tools & Log Splitters	92 - 95
Metalworking	
Pillar Drills	96 - 99
Metal Cutting Saws	100 - 107
Fabrication, Linishers, Polishers & Grinders	108 - 111
Induction Heaters	112
Water Pumps	
Electric Submersible & Surface Water Pumps	113 - 114
Petrol & Diesel Surface Water Pumps	115
Welding & Plasma Cutting	
MIG Welders	117 - 123
Spot Welders	124
ARC Welders	125 - 127
TIG Welders	128 - 129
Plasma Cutters	130 - 131
Welding Headshields Welding Fume Extractors	132 - 133 134 - 135
Welding Accessories	136 - 138
Woodworking	.55 100
Spindle Moulders, Morticers, Planer Thicknessers, Lathes	139 - 141
Table, Mitre & Bandsaws	142 - 146
Workshop Tables & Stands	147
Dust Collectors	148 - 149
Accessories	150

ARCOMPRESSORS FROMSIP

Our range is built to meet our users' needs, from home use, workshops, garages and farms, right through to continuous industrial and manufacturing applications.

To help with the product selection process, these pages explain the compressor types within our range and the benefits of each. If you would like help identifying the right model for your requirements, simply scan the QR code (right) to access our NEW Product Selector tool!

LOW NOISE DIRECT DRIVE PISTON

Low Noise - 2 Pole Direct Drive

Low noise units ideal for where classic direct drive compressors are too loud. All oil-free.

QT Air Ultra Low Noise - 4 Pole Direct Drive

Our premium range of ultra low noise units that combine even lower noise levels and **50**% longer product life than the 2 pole range. All oil-free.

NARDI 12v/24v Direct Drive

Low noise units that work from 12v or 24v where mains supply is not available. All oil-free.





DIRECT DRIVE PISTON

Our classic range of direct drive compressors

Oil-Lubricated

Competitively priced, quality compressors.

PAGES 15

SPACE-SAVING

Ideal if space is an issue in the workplace

Direct Drive

Classic and low noise models available.

Vertical Belt Drive

For where more air is required in a hard-working environment.



NEW PRODUCT SELECTOR

NEED HELP CHOOSING

YOUR IDEAL COMPRESSOR?









BELT DRIVE PISTON

230v Single Phase

Deliver longer life than direct drive. Well balanced acoustic profile perfectly suited to industrial workshop settings.

400v 3 Phase

3 Phase units designed for heavy industrial use.

Petrol Powered

Honda™ and Kohler® engine-powered petrol units where mobility is paramount.

Low Noise

Fitted with a noise reduction cabinet and therefore ideal when installed close to a workspace.



PAGES 19-26

INDUSTRIAL DIRECT DRIVE

NARDI Industrial Multi-Power Direct Drive Piston

A simple alternative to screw compressors where low noise and performance is paramount. Maintenance friendly.

INDUSTRIAL ROTARY SCREW

These units are ideal for continuous applications and have to run for a minimum number of hours per day.

Rotary Screw Variable Speed

Combine new technology, low noise and energy efficiency.

Rotary Screw Fixed Speed

Classic Italian made units that are robust and reliable.



AIR TOOLS & ACCESSORIES &

PAGES 32 - 36

LOW NOISE OIL-FREE COMPRESSORS

Built for everyday applications, these oil-free and low noise air compressors are ideal for small and medium-sized work areas, mobile applications and home workshops. Featuring latest generation 2-pole motor pump units, they're designed to deliver quieter performance compared to standard single-cylinder SIP compressor models.

- · Perfect for air tool applications including inflation tasks, nailing, stapling and airbrushing
- Delivers up to 13.6CFM piston displacement resulting in 9CFM Free Air Delivery from a standard mains supply
- Operates at low noise 62dB 71dB, making it perfect for work areas where noise level is a consideration
- Oil-free for low maintenance use, meaning no oil carry-through to air tools and equipment
- Wheel-mounted design with U-handle for full movement and work area flexibility



OIL FREE 2-POLE MOTOR PUMP UNITS FOR CONSISTENT PERFORMANCE



LARGE MOTOR FAN IMPROVES COOLING TO MAINTAIN PUMP TEMPERATURE AND OUTPUT





- POWERFUL OUTPUT
- IMPROVED COOLING
 EFFICIENT PERFORMANCE



Item No	05478	05479				
MODEL	SIP DD 2HP 24LTR LOW NOISE OIL-FREE DIRECT DRIVE	SIP DD 2HP 50LTR LOW NOISE OIL-FREE DIRECT DRIVE				
INPUT SUPPLY	230v (13A)	230v (13A)				
MOTOR	2hp (1.5kW), 2 POLE, Brushless	2hp (1.5kW), 2 POLE, Brushless				
AIR RECEIVER	24ltr	50ltr				
PISTON DISPLACEMENT	9.6CFM (272ltr/min)	9.6CFM (272ltr/min)				
FREE AIR DELIVERY	4.7CFM (131ltr/min)	4.7CFM (131ltr/min)				
MAX. AIR PRESSURE	116psi (8bar)	116psi (8bar)				
PUMP SPEED	2800rpm	2800rpm				
NOISE LEVEL	62dB	62dB				
ADDITIONAL FEATURES	TWIN-CYLINDER MOTOR PUMP UNIT SOLID WHEELS PULL HANDLE	TWIN-CYLINDER MOTOR PUMP UNIT SOLID WHEELS PULL HANDLE				










Item No	05480	05481					
MODEL	SIP DD 3HP 50LTR LOW NOISE OIL-FREE DIRECT DRIVE	SIP DD 3HP 100LTR LOW NOISE OIL-FREE DIRECT DRIVE					
INPUT SUPPLY	230v (13A)	230v (13A)					
MOTOR	3hp (2.2kW), 2 POLE, Brushless	3hp (2.2kW), 2 POLE, Brushless					
AIR RECEIVER	50ltr	100ltr					
PISTON DISPLACEMENT	13.6CFM (385ltr/min)	13.6CFM (385ltr/min)					
FREE AIR DELIVERY	9CFM (255ltr/min)	9CFM (255ltr/min)					
MAX. AIR PRESSURE	116psi (8bar)	116psi (8bar)					
PUMP SPEED	2800rpm	2800rpm					
NOISE LEVEL	71dB	71dB					
ADDITIONAL FEATURES	TWIN-CYLINDER MOTOR PUMP UNIT SOLID WHEELS PULL HANDLE	TWIN-CYLINDER MOTOR PUMP UNIT SOLID WHEELS PULL HANDLE					

Built for everyday applications these oil-free and ultra low noise air compressors are ideal for small and medium-sized work areas, mobile applications and home workshops. These powerful and innovative air compressors feature slow-running 4-pole motor pump units which offers up to 50% longer working life.

- · Perfect for air tool applications including inflation tasks, nailing, stapling and airbrushing
- Delivers up to 16CFM piston displacement resulting in 13CFM Free Air Delivery from a standard mains supply
- Operates at ultra low noise 59dB 62dB, making it perfect for work areas where noise level is a consideration
- Oil-free for low maintenance use, meaning no oil carry-through to air tools and equipment
- · Wheel-mounted design with U-handle for full movement and work area flexibility

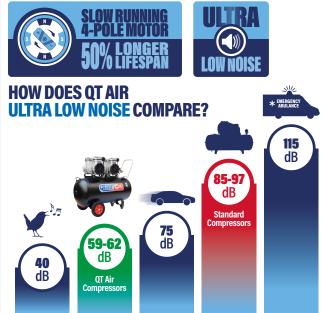



Item No	05398	05491	05492	05493	05494
MODEL	SIP QT AIR DD 0.75HP 6LTR ULTRA LOW NOISE OIL-FREE DIRECT DRIVE	SIP QT AIR DD 1.5HP 24LTR ULTRA LOW NOISE OIL-FREE DIRECT DRIVE	SIP QT AIR DD 1.5HP 50LTR ULTRA LOW NOISE OIL-FREE DIRECT DRIVE	SIP QT AIR DD 3HP 50LTR ULTRA LOW NOISE OIL-FREE DIRECT DRIVE	SIP QT AIR DD 3HP 100LTR ULTRA LOW NOISE OIL-FREE DIRECT DRIVE
INPUT SUPPLY	230v (13A)	230v (13A)	230v (13A)	230v (13A)	230v (13A)
MOTOR	0.75hp (0.5kW), 4 POLE, Brushless	1.5hp (1.1kW), 4 POLE, Brushless	1.5hp (1.1kW), 4 POLE, Brushless	3hp (2.2kW), 4 POLE, Brushless	3hp (2.2kW), 4 POLE, Brushless
AIR RECEIVER	6ltr	24ltr	50ltr	50ltr	100ltr
PISTON DISPLACEMENT	2CFM	8CFM	8CFM	16CFM	16CFM
FREE AIR DELIVERY	1.5CFM	6.5CFM	6.5CFM	13CFM	13CFM
MAX. AIR PRESSURE	116psi (8bar)	116psi (8bar)	116psi (8bar)	116psi (8bar)	116psi (8bar)
PUMP SPEED	1450rpm	1450rpm	1450rpm	1450rpm	1450rpm
NOISE LEVEL	59dB	59dB	59dB	62dB	62dB
ADDITIONAL FEATURES	TWIN-CYLINDER MOTOR PUMP UNIT TW		TWIN-CYLINDER MOTOR PUMP UNIT Hard Wearing Wheels Pull Handle	2x TWIN-CYLINDER Motor Pump Unit Hard Wearing Wheels Pull Handle	2x TWIN-CYLINDER MOTOR PUMP UNIT HARD WEARING WHEELS PULL HANDLE







FOR LONGER LIFE CYCLE







DURABLE BRAIDED DELIVERY HOSES

SOLID HARD-WEARING WHEELS & PULL HANDLES FOR EASY WORK AREA MOVEMENT



SIP QT AIR COMPRESSOR SERVICE KIT

Ensure optimal performance for your air compressor by performing a service every 12 months.

For use with: 05491, 05492, 05493, 05494, 05497 & 05498

KIT INCLUDES:

SIP Valve Plate Kit
 SIP Piston Seals,
 SIP Air Filters, SIP Piston
 Cover Bolts

NOTE: 1 kit per motor pump unit

Item No: A101-00887



SIP QT AIR BATTERY & MAINS OILLESS COMPRESSOR

• Input Supply: 18v - 20v (DC) / 230v (AC)

Motor Power: 0.67hp (0.5kW)

- Battery Type: 20v 4Ah (see Al01-00484)

Battery Runtime: 20min continuous

Battery Charge Time: 7.5hrs
 Air Receiver: 5ltr

· Piston Displacement: 2.8CFM (79ltr/min)

Item No: 05313

• Free Air Delivery: 2.3CFM (65ltr/min)

- Max. Pressure: 130psi (9bar)





1x BATTERY & CHARGER INCLUDED

REPLACEMENT 4AH 20V BATTERY



Item No: AI01-00484

ULTRA LOW NOISE OIL-FREE COMPRESSORS

AVAILABLE IN:


150LTR

200LTR

Designed for high air volume applications, these larger QT models are built to support demanding applications in large workshops and automotive settings. These powerful and innovative air compressors feature slow-running 4-pole motor pump units which offer up to 50% longer working life.

- Ideal for paint spraying, pneumatic car lifts, tyre changers and plasma cutters. Perfect for sanding and grinding applications
- Delivers high 22.8CFM piston displacement resulting in 18.2CFM Free Air Delivery from a single-phase supply

 Operates at an ultra low 67dB, it's perfect for work areas where noise level is a consideration

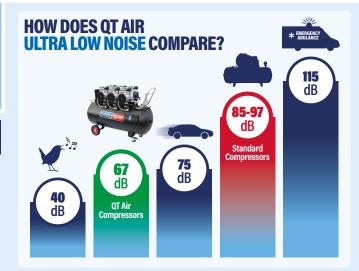









1 KIT PER MOTOR PUMP UNIT





Item No	05497	05498
MODEL	SIP QT AIR DD 4.5HP 150LTR ULTRA LOW NOISE OIL-FREE DIRECT DRIVE	SIP QT AIR DD 4.5HP 200LTR ULTRA LOW NOISE Oil-free direct drive
INPUT SUPPLY	230v (16A)	230v (16A)
MOTOR	4.5hp (3.3kW), 4 POLE, Brushless	4.5hp (3.3kW), 4 POLE, Brushless
AIR RECEIVER	150ltr	200ltr
PISTON DISPLACEMENT	22.8CFM (646ltr/min)	22.8CFM (646ltr/min)
FREE AIR DELIVERY	18.2CFM (515ltr/min)	18.2CFM (515ltr/min)
MAX. AIR PRESSURE	116psi (8bar)	116psi (8bar)
PUMP SPEED	1450rpm	1450rpm
NOISE LEVEL	67dB	67dB
ADDITIONAL FEATURES	3x TWIN-CYLINDER MOTOR PUMP UNIT HARD-WEARING WHEELS PULL HANDLE	3x TWIN-CYLINDER MOTOR PUMP UNIT HARD-WEARING WHEELS PULL HANDLE

AIR COMPRESSORS - LOW NOISE







ULTRA LOW NOISE SIX CYLINDER PUMP UNIT OPERATES AT JUST 67dB



MAINS SUPPLY CONTROL BOX Initiates Start-Up from 16A Single Phase Supply



TANK & WORKING PRESSURE GAUGES WITH REGULATOR OPTIMISE AIR DELIVERY





SUPPLIED U-HANDLE INCLUDES BRACKET & FIXINGS FOR MOUNTING SIP AIR HOSE REELS SEE BELOW



HARD-WEARING WHEELS & Lockable Castors for Greater Work Area Mobility

QT AIR COMPRESSOR + AIR HOSE REEL PACKAGE DEALS



SIP QT AIR DD 4.5HP 150LTR + SIP AIR HOSE REEL R15 (07977)

Item No: 05497AHR15

SIP QT AIR DD 4.5HP 200LTR + SIP AIR HOSE REEL R15 (07977)

Item No: 05498AHR15

QT AIR COMPRESSORS ARE ALSO COMPATIBLE WITH SIP AIR HOSE REELS (07972, 07974)



SEE PAGE 33 FOR MORE INFO

NARDI 12V/24V DC COMPACT COMPRESSORS

Premium compact oil-free compressors featuring DC brush motors, ideal for vehicle applications.

- · Direct drive crankshaft via the motor shaft
- · Oil-free for long life and low maintenance
- · High-quality pumps with technopolymer piston rings
- · Forced air cooling for longer run times
- · Integrated adjustable air pressure regulators

SILVERSTONE RANGE

- · Single cylinder pump design
- Motors up to 0.6hp / 0.45kW
- 5ltr air receiver
- · Standalone models suitable for low pressure volume applications
- · Lightweight and portable ideal for 'air brushing and' nebulising applications
- 12 / 24v DC battery-powered models for tyre inflation

ESPRIT RANGE

- · Flat twin cylinder pump design
- · Motors up to 0.8hp / 0.6kW
- 15ltr air receiver
- Low noise 62dB(A) perfect for indoor applications
- · Lightweight and portable ideal for air brushing, nailing and stapling
- 12 / 24v DC options for special vehicle installations

EXTREME PORTABLE RANGE

- V-Twin cylinder pump design
- High performance
- · Motors up to 1.0hp / 0.8kW
- 7 or 15ltr air receivers

























TECHN	OPO	LYN	н
PISTO	IN R	ING	¢

Item No	MODEL	INPUT	MOTOR	RECEIVER SIZE	PISTON DISPLACEMENT	FREE AIR DELIVERY	MAX. PRESSURE	NOISE LEVEL
SIL56012	Silverstone 2 12 Volt 0.6HP 5LTR	12v DC	0.6hp	5ltr	3.5CFM	2.5CFM	8bar	72dB(A)
SIL56021224	Silverstone 2 12/24 Volt 0.5HP 5LTR	12v DC	0.5hp	5ltr	2.1CFM	1.5CFM	8bar	74dB(A)
31130021224	Silverstolle 2 12/24 voit 0.5HF 5LIN	24v DC			4.2CFM	2.9CFM		
ESP1560012	Esprit 3 12v 0.8HP 15LTR	12v DC	0.8hp	15ltr	7.9CFM	5.5CFM	10bar	62dB(A)
ESP1550024	Esprit 3 24v 0.75HP 15LTR	24v DC	0.75hp	15ltr	7.9CFM	5.5CFM	10bar	62dB(A)
EXT780024	Extreme 3 24v 1HP 7LTR	24v DC	1hp	7ltr	8.8CFM	6.2CFM	10bar	72dB(A)
EXT3080024	Extreme 3 24v 1HP 30LTR	24v DC	1hp	30ltr	8.8CFM	6.2CFM	10bar	72dB(A)





DIRECT DRIVE OIL-LUBRICATED COMPRESSORS

Entry level air compressor ideal for general purpose applications in workshops and garages.

- Highly durable, these oil-lubricated models feature efficient cooling systems for long-life use and an easy access air filter for straightforward maintenance
 Using a wheel-mounted design ensures easy work area movement





A V-Twin pump configuration delivers greater efficiency and cooling when filling the receiver. It also offers improved resistance to machine wear for long life performance.



Item No	MODEL	INPUT SUPPLY	MOTOR	AIR RECEIVER SIZE	PISTON DISPLACEMENT	FREE AIR DELIVERY	MAX. PRESSURE	NOISE LEVEL	ADDITIONAL FEATURES
06457	SIP DD 2HP 24LTR	230v (13A)	2hp	24ltr	8CFM	4.8CFM	116psi (8bar)	94.5dB(A)	OIL-LUBRICATED
06459	SIP DD 2HP 50LTR	230v (13A)	2hp	50ltr	8CFM	4.8CFM	116psi (8bar)	94.5dB(A)	OIL-LUBRICATED
05325	SIP DDVT 3HP 50LTR V-Twin	230v (13A)	3hp	50ltr	HIGH 14CFM	8CFM	145psi (10bar)	97dB(A)	OIL-LUBRICATED
06455	SIP DDVT 3HP 100LTR V-Twin	230v (13A)	3hp	100ltr	HIGH 14CFM	8CFM	145psi (10bar)	97dB(A)	OIL-LUBRICATED

A versatile air compressor ideal for general work areas, home and mobile applications. Wheel-mounted design with pull handle allows full movement in a variety of work areas for added flexibility.

- Oil-free operation for low maintenance and clean air
- Lightweight and compact design for portability
 Pressure switch and pressure regulator with easy-read gauge
- 7 piece accessory kit included








A Low noise wall-mounted air compressor that provides a quick and easy solution for a variety of uses around the garage and home workshop.

- In a compact, space-saving design the Airhub delivers 8bar of pressure to a 9mtr self-retracting hose reel, whilst the wall-mount bracket offers 180° rotation for added versatility
- · Lightweight and easy to install, the Airhub is a convenient, multi-purpose compressed air solution






SUPPLIED WITH 5 PIECE AIR KIT









Item No	MODEL	INPUT SUPPLY	MOTOR	AIR Receiver Size	PISTON DISPLACEMENT	FREE AIR DELIVERY	MAX. PRESSURE	NOISE LEVEL	WEIGHT	ADDITIONAL FEATURES
04397	TIGREN DD 2HP 24LTR	230v (13A)	2hp	24ltr	8CFM	5CFM	116psi (8bar)	97dB(A)	22kg	OIL-FREE
05323	SIP AIRHUB	230v (13A)	1.5hp	n/a	6.3CFM	4.2CFM	116psi (8bar)	69dB(A)	9kg	OIL-FREE



13A 230v

DIRECT DRIVE PORTABLE COMPRESSORS

Compact and portable space-saving air compressors with supply options suitable for both domestic (230v/13A) and on-site (110v/16A) uses.

These versatile compressors are suitable for light tasks including tyre inflation, leisure inflatables, duster guns and air staplers.



SIP 24LTR AIR RECEIVER

- A convenient and portable supply of compressed air
- Ideal for when it is not possible to use an air compressor - just load the receiver and take it with you











Item No	MODEL	INPUT SUPPLY	MOTOR	AIR Receiver Size	PISTON DISPLACEMENT	FREE AIR DELIVERY	MAX. Pressure	NOISE LEVEL	WEIGHT	ADDITIONAL FEATURES
05295	SIP 6	230v (13A)	1.5hp	6ltr	6.4CFM	4CFM	116psi (8bar)	97dB(A)	9kg	OIL-FREE
06254	SIP 0L197/10RC	230v (13A)	1.5hp	10ltr	8CFM	4CFM	145psi (10bar)	97dB(A)	11kg	OIL-FREE
06256	SIP 0L197/10RC	110v (16A)	1.5hp	10ltr	8CFM	4CFM	145psi (10bar)	97dB(A)	11kg	OIL-FREE
06249	SIP V215/25	230v (13A)	1.5hp	24ltr	6.4CFM	3CFM	116psi (8bar)	97dB(A)	14kg	OIL-FREE

LOW NOISE OIL-FREE VERTICAL RECT DRIVE COMPRESSORS

Space-saving vertical design air compressors with a smaller overall footprint making them ideal for work areas with restricted floor space.

- Operates at low noise 62dB 67dB great for work areas where noise level is a consideration
- Perfect for air tool applications including inflation tasks, nailing, stapling and airbrushing
- Ideal for small to medium sized work areas, mobile applications and home workshops
- Oil-free for low maintenance use, meaning no oil carry-through to air tools and equipment





ANGLED PULL HANDLE
PROTECTS MOTOR PUMP UNIT
& AIR PRESSURE CONTROL

VERTICAL BELT DRIVE

Featuring a space-saving design, our oil-lubricated vertical belt drive air compressors offer high air production of up to 24CFM ideal for automotive, agricultural and engineering workshops.

- Ideal for pneumatic air tools, these versatile compressors have been designed with a reduced overall footprint to operate and be stored in tight work spaces


















Item No	MODEL	INPUT Supply	MOTOR	AIR RECEIVER SIZE	PISTON DISPLACEMENT	FREE AIR DELIVERY	MAX. PRESSURE	NOISE LEVEL	ADDITIONAL FEATURES
05483	SIP DD 2HP 50LTR	230v (13A)	2hp	50ltr	9.6CFM	4.7CFM	116psi (8bar)	62db(A)	OIL-FREE / DIRECT DRIVE
05484	SIP DD 3HP 100LTR	230v (13A)	3hp	100ltr	13.6CFM	9CFM	116psi (8bar)	67db(A)	OIL-FREE / DIRECT DRIVE
06323	SIP VN3/150-SB	230v (13A)	3hp	150ltr	13CFM	8.5CFM	145psi (10bar)	96db(A)	OIL-LUBRICATED / BELT DRIVE
06335	SIP VN5.5/150-TB	400v (32A) 3 phase	5.5hp	150ltr	24CFM	18CFM	145psi (10bar)	97db(A)	OIL-LUBRICATED / BELT DRIVE



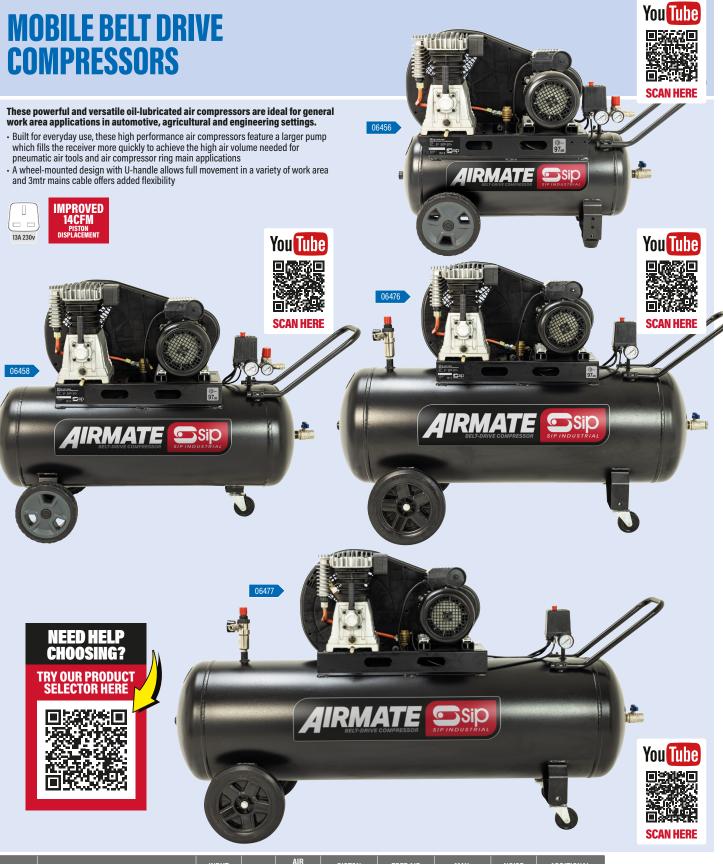

Item No	MODEL	INPUT SUPPLY	MOTOR	AIR Receiver Size	PISTON DISPLACEMENT	FREE AIR DELIVERY	MAX. Pressure	NOISE LEVEL	ADDITIONAL Features
06456	SIP BD 3HP 50LTR	230v (13A)	3hp	50ltr	HIGH 14CFM	10CFM	145psi (10bar)	96dB(A)	OIL-LUBRICATED
06458	SIP BD 3HP 100LTR	230v (13A)	3hp	100ltr	HIGH 14CFM	10CFM	145psi (10bar)	96dB(A)	OIL-LUBRICATED
06476	SIP BD 3HP 150LTR	230v (13A)	3hp	150ltr	HIGH 14CFM	10CFM	145psi (10bar)	96dB(A)	OIL-LUBRICATED
06477	SIP BD 3HP 200LTR	230v (13A)	3hp	200ltr	HIGH 14CFM	10CFM	145psi (10bar)	96dB(A)	OIL-LUBRICATED



Item No	MODEL	INPUT SUPPLY	MOTOR	AIR RECEIVER SIZE	PISTON DISPLACEMENT	FREE AIR DELIVERY	MAX. PRESSURE	NOISE LEVEL	ADDITIONAL Features
05300	SIP PX3/150-SRB	230v (16A)	3hp	150ltr	HIGH 16CFM	10.7CFM	145psi (10bar)	96dB(A)	OIL-LUBRICATED
05302	SIP PX3/200-SRB	230v (16A)	3hp	200ltr	HIGH 16CFM	10.7CFM	145psi (10bar)	96dB(A)	OIL-LUBRICATED
05308	SIP PX4/200B	230v (32A)	4hp	200ltr	HIGH 18CFM FROM 1 PHASE	14CFM	145psi (10bar)	96dB(A)	OIL-LUBRICATED



FLOOR-STANDING BELT-DRIVE TANDEM COMPRESSORS

TANDEM: High-output air from a single-phase supply. SIP tandem compressors deliver serious performance with dual 3HP motors and 270L capacity, ideal for demanding workshops without needing 3-phase.



Item No	MODEL	INPUT SUPPLY	MOTOR	AIR RECEIVER SIZE	PISTON DISPLACEMENT	FREE AIR DELIVERY	MAX. PRESSURE	NOISE LEVEL	ADDITIONAL Features
04386	TIGREN 270LTR TANDEM	230v (32A)	2x 3hp	270ltr	HIGH 25CFM FROM 1 PHASE	18.5CFM	145psi (10bar)	96dB(A)	TWIN PUMPS / TWIN MOTORS
05251	SIP B3800/270 TANDEM	230v (32A)	2x 3hp	270ltr	HIGH 32CFM FROM 1 PHASE	22CFM	145psi (10bar)	96dB(A)	TWIN PUMPS / TWIN MOTORS



Item No	MODEL	INPUT SUPPLY	MOTOR	AIR Receiver Size	PISTON DISPLACEMENT	FREE AIR DELIVERY	MAX. Pressure	WEIGHT	ADDITIONAL Features
05311	SIP PX4-3/200B	400v (20A)	4hp	200ltr	HIGH 18CFM	14CFM	145psi (10bar)	96kg	HD 2 cylinder 1 Stage Pump
06583	SIP TN5.5/200	400v (20A)	5.5hp	200ltr	24CFM	18CFM	145psi (10bar)	112kg	2 Stage Pump
06585	SIP TN7.5/270	400v (20A)	7.5hp	270ltr	34CFM	25CFM	145psi (10bar)	168kg	2 Stage Pump
06587	SIP TN10/270	400v (20A)	10hp	270ltr	42CFM	28CFM	145psi (10bar)	201kg	2 Stage Pump / STAR DELTA STARTER







Item No	MODEL	INPUT Supply	MOTOR	AIR RECEIVER SIZE	PISTON DISPLACEMENT	FREE AIR DELIVERY	MAX. Pressure	WEIGHT	ADDITIONAL Features
06289	SIP ISBD5.5/270	400v (32A)	5.5hp	270ltr	23.5CFM	15.5CFM	160psi (11bar)	166kg	2 Stage Pump
06291	SIP ISBD7.5/270	400v (32A)	7.5hp	270ltr	31CFM	20.5CFM	160psi (11bar)	190kg	2 Stage Pump
06295	SIP ISBD10/270	400v (32A)	10hp	270ltr	38CFM	25CFM	160psi (11bar)	220kg	STAR DELTA STARTER
06297	SIP ISBD15/500	400v (63A)	15hp	500ltr	61.5CFM	40.7CFM	160psi (11bar)	313kg	STAR DELTA STARTER

PETROL-POWERED BELT DRIVE COMPRESSORS

SIP PETROL INDUSTRIAL SUPER KOHLER® COMPRESSORS

Powered by a Kohler® petrol engine, these versatile and portable air compressors transport easily to remote locations which eliminates the need for an external power source.

• This range is assembled in the UK by SIP and feature a 10-year anti-corrosion air receiver warranty. **









Item No	MODEL	ENGINE	AIR RECEIVER SIZE	PISTON DISPLACEMENT	FREE AIR DELIVERY	MAX. AIR Pressure	FRAME DESIGN	ADDITIONAL Features
04328	SIP INDUSTRIAL SUPER ISKP7/50	KOHLER 7HP - 207CC	50ltr	16CFM	11CFM	150psi (10.3bar)	1	WHEEL KIT
04330	SIP INDUSTRIAL SUPER ISKP7/150	KOHLER 7HP - 207CC	150ltr	16CFM	11CFM	150psi (10.3bar)		-
04331	SIP INDUSTRIAL SUPER ISKP7/150ES	KOHLER 7HP - 207CC	150ltr	16CFM	11CFM	150psi (10.3bar)		ELECTRIC START*

SIP COMPRESSED AIR DRYERS

Reduce moisture from the air supply and extends the life of air tools. Suitable for screw and piston compressors.

10 YEAR AIR RECEIVER

ANTI-CORROSION WARRANTY**

Item No	05303	05306	05307
MODEL	SIP PS9	SIP PS11	SIP PS17
INPUT SUPPLY	230v (13A)	230v (13A)	230v (13A)
LTR/MIN	900	1100	1700
FLOW RATE MTR3/HR	54	66	102
CFM	32	39	60
MAX. PRESSURE	232psi (16bar)	232psi (16bar)	232psi (16bar)
CONNECTION	½" BSP	½" BSP	1" BSP







10 YEAR AIR RECEIVER

ANTI-CORROSION WARRANTY**

ENGINE WARRANTY PREMIER QUALITY







Item No	MODEL	ENGINE	AIR RECEIVER SIZE	PISTON DISPLACEMENT	FREE AIR DELIVERY	MAX. AIR PRESSURE	FRAME DESIGN	ADDITIONAL FEATURES
04644	SIP INDUSTRIAL SUPER ISHP6/50	HONDA GP200 - 196CC	50ltr	16CFM	11CFM	150psi (10.3bar)	✓	WHEEL KIT
04650	SIP INDUSTRIAL SUPER ISHP6/150	HONDA GP200 - 196CC	150ltr	16CFM	11CFM	150psi (10.3bar)		-
04444	SIP INDUSTRIAL SUPER ISHP5.5/50	HONDA GX160 - 163CC	50ltr	16CFM	11CFM	150psi (10.3bar)	√	WHEEL KIT
04450	SIP INDUSTRIAL SUPER ISHP5.5/150	HONDA GX160 - 163CC	150ltr	16CFM	11CFM	150psi (10.3bar)		-
04451	SIP INDUSTRIAL SUPER ISHP5.5/150ES	HONDA GX160 - 163CC	150ltr	16CFM	11CFM	150psi (10.3bar)		ELECTRIC START*
04459	SIP INDUSTRIAL SUPER ISHP11/150	HONDA GX340 - 340CC	150ltr	35CFM	26CFM	150psi (10.3bar)		-
04465	SIP INDUSTRIAL SUPER ISHP11/150ES	HONDA GX340 - 340CC	150ltr	35CFM	26CFM	150psi (10.3bar)		ELECTRIC START*
04461	SIP INDUSTRIAL SUPER ISHP11/200	HONDA GX340 - 340CC	200ltr	35CFM	26CFM	150psi (10.3bar)		-
04463	SIP INDUSTRIAL SUPER ISHP11/200ES	HONDA GX340 - 340CC	200ltr	35CFM	26CFM	150psi (10.3bar)		ELECTRIC START*







SIP Silenced Compressors are designed to give you powerful performance but with a fraction of the noise. An excellent addition to any workshop where the installation is required close to the workspace.

- Belt drive performance with low noise levels
- · Quick easy access panels for maintenance and servicing
- Soundproof cabinet with air intake silencer
- Rubber-mounted saddles
- Wheel-mounted for easy movement (06219, 05202)
- Static placement for more permanent siting (04205, 04208)

QUICK ACCESS PANEL FOR EASY SERVICING AND MAINTENANCE REQUIREMENTS

BELT DRIVE PERFORMANCE WITH LOW NOISE LEVELS

SOUNDPROOF CABINET WITH AIR INTAKE SILENCER

RUBBER-MOUNTED SADDLE



Item No	MODEL	INPUT Supply	MOTOR	AIR RECEIVER SIZE	PISTON Displacement	FREE AIR DELIVERY	MAX. AIR PRESSURE	SOUND PRESSURE*	ADDITIONAL Features
06219	SIP PB3800/3M/100	230v (16A)	2.2kW (3hp)	100ltr	14CFM	9.5CFM	145psi (10bar)	69dB(A)	HEAVY-DUTY TWIN-CYLINDER PUMP
05202	SIP PB3800/3M/200	230v (16A)	2.2kW (3hp)	200ltr	14CFM	9.5CFM	145psi (10bar)	69dB(A)	HEAVY-DUTY TWIN-CYLINDER PUMP
04205	SIP NB5.5/270	400v (32A)	4kW (5.5hp)	270ltr	23CFM	16CFM	160psi (11bar)	64dB(A)	HEAVY-DUTY 2-STAGE PUMP
04208	SIP NB7.5/270	400v (32A)	5.5kW (7.5hp)	270ltr	30CFM	20CFM	145psi (10bar)	64dB(A)	HEAVY-DUTY 2-STAGE PUMP



NARDI INDUSTRIAL MULTI-POWER DIRECT DRIVE COMPRESSORS







EXTREME MP RANGE

V-TWIN OIL-FREE INDUSTRIAL HIGH PERFORMANCE.

The unique design of the of NARDI MP compressor range ensures low maintenance operation.

- · Oil-free for low maintenance use
- · Direct drive system means no drive belt to check
- · Unique air intake lengthens life of air filter element
- Low noise compared with traditional piston compressors, offering an approx. 25dB (25%) reduction
- Available in high-performing 4, 8 or 12-cylinder models
- · 200ltr and 270ltr air receiver options
- Supplied with single or 3-phase motors ranging from 2.5hp to 9hp

LOW MAINTENANCE LOW NOISE







TECHNOPOLYMER PISTON RINGS



AIR INTAKES



CYLINDER HEAD AIR FILTERS





EXCLUSIVE TO SIP*

ONLY AVAILABLE FROM SIP: Extreme MP 2.5HP 4 cylinder - 200LTR Extreme MP 3.0HP 4 cylinder - 200LTR Extreme MP 5.0HP 8 cylinder - 200LTR Tandem Extreme MP 6.0HP 8 cylinder - 200LTR Tandem



INTELLIGENT CONTROL PANEL

(SUPPLIED WITH EXTMP270090CP)

- Bespoke multi-pump control panel; electrical cost-saving, even power distribution across each motor pump configuration
- Service interval indicator; maintain optimum performance and reliability
- Control panel controls up to 3 motor / pump units continually dependant on air requirements; optimises pump usage and energy cost saver
- Individual pump hour meters and timers; microprocessor controlled pump selection for even power distribution, wear and tear

Item No	MODEL	INPUT	MOTOR	RECEIVER SIZE	PISTON DISPLACEMENT	FREE AIR DELIVERY		NOISE LEVEL
EXTMP20025	Extreme MP 2.5HP 4 Cylinder 200LTR	230v	2.5hp	200ltr	17.0CFM	11.9CFM	10bar	73dB(A)
EXTMP20030	Extreme MP 3.0HP 4 Cylinder 200LTR	400v	3.0hp	200ltr	21.2CFM	14.9CFM	10bar	73dB(A)
EXTMP20050	Extreme MP 5.0HP 8 Cylinder 200LTR Tandem	230v	2x 2.5hp	200ltr	34.0CFM	23.8CFM	10bar	74dB(A)
EXTMP20060	Extreme MP 6.0HP 8 Cylinder 200LTR Tandem	400v	2x 3.0hp	200ltr	42.2CFM	29.8CFM	10bar	74dB(A)
EXTMP27030	Extreme MP 3.0HP 4 Cylinder 270LTR	400v	3.0hp	270ltr	21.2CFM	14.9CFM	10bar	73dB(A)
EXTMP27090CP	Extreme MP 9.0HP 12 Cylinder 270LTR Tri-Motor Pump & Control Panel	400v	3x 3.0hp	270ltr	63.6CFM	44.5CFM	10bar	75dB(A)



SIP's latest generation variable speed direct drive compressors are fully configurable with a range of supply, output and receiver tank size options.

These highly efficient compressors offer a greater operating range to meet high-demand air requirements and optimise energy usage.

- · Direct drive transmission negates slippage for greater power transfer
- · Silenced cabinet ensures reduced noise operation
- · Easy access cabinet for maintenance and service
- · All-in-one design ensures smaller overall footprint



PRECISION ENGINEERED TWIN PARALLEL ROTARY SCREWS



REAL-TIME DIAGNOSTIC COLOUR DISPLAY INDICATES COMPRESSOR STATUS

08258 08260

08259

08261 08262

08263

08268



VARIABLE SPEED MOTOR

100% UK TESTED BEFORE DESPATCH



SIP COMPRESSOR PARTICULATE & OIL **FILTRATION SYSTEM**

Collects air particle contaminants including water droplets, oils, dirt and dust before powering air tools, air-powered machines and ring main systems.

Meets air quality standard 2-4-2 in accordance with ISO 8573-1 for greater air purity.

Consists of:

- Consists or:

 Particulate filter ≤ 1µm (particle Ø)

 Coalescing filter ≤ 0.01µm (particle Ø)

 Adaptor and housing kit

 Brackets and fixing kit included
- System is wall or compressor mountable

For use with SIP VSDD Rotary Screw Compressor



Replacement Filter Elements available;

- Particulate (Al07-00017)
- Coalescing (Al07-00018)

Item No: AI07-00017

Item No: AI07-00018

0
Ō
2
0
Ō
2
6
\sim
\sim
=
0
Æ
ш
문
S
OF.
OF
NOF
AN OF
NOF
AN OF
CE AN OF
ICE AN OF
ACE AN OF
PLACE AN OF

Item No	MODEL	INPUT	MOTOR (IE4)	RECEIVER SIZE	FREE AIR DELIVERY	MAX. WORKING Pressure	NOISE LEVEL
08258	SIP VSDD 5.5kW 8BAR 200LTR	400v (32A)	5.5kW (7hp)	200ltr	25CFM (720ltr/min)	116psi (8bar)	62dB(A)
08260	SIP VSDD 5.5kW 10BAR 200LTR	400v (32A)	5.5kW (7hp)	200ltr	22CFM (630ltr/min)	145psi (10bar)	62dB(A)
08259	SIP VSDD 7.5kW 8BAR 200LTR	400v (32A)	7.5kW (10hp)	200ltr	37CFM (1050ltr/min)	116psi (8bar)	62dB(A)
08261	SIP VSDD 7.5kW 10BAR 200LTR	400v (32A)	7.5kW (10hp)	200ltr	32CFM (920ltr/min)	145psi (10bar)	62dB(A)
08262	SIP VSDD 11kW 8BAR 500ltr	400v (32A)	11kW (15hp)	500ltr	57CFM (1613ltr/min)	116psi (8bar)	62dB(A)
08265	SIP VSDD 11kW 10BAR 500ltr	400v (32A)	11kW (15hp)	500ltr	50CFM (1415ltr/min)	145psi (10bar)	62dB(A)
08263	SIP VSDD 15kW 8BAR 500ltr	400v (63A)	15kW (20hp)	500ltr	75CFM (2123ltr/min)	116psi (8bar)	62dB(A)
08268	SIP VSDD 15kW 10BAR 500ltr	400v (63A)	15kW (20hp)	500ltr	66CFM (1868ltr/min)	145psi (10bar)	62dB(A)




DUSTRIAL VARIABLE SPEED ROTARY SCREW RECT DRIVE COMPRESSORS WITH DRYER & FILTERS

PRECISION ENGINEERED TWIN PARALLEL ROTARY SCREWS

REAL-TIME DIAGNOSTIC COLOUR DISPLAY INDICATES COMPRESSOR STATUS

Fitted with a refrigerated dryer to reduce air moisture and available with optional particulate and oil filtration system to support guidelines in meeting air quality standard classification 2-4-2 in accordance with ISO 8573-1.

- · Direct drive transmission negates slippage for greater power transfer
- · Configurable with 200ltr or 500ltr receiver tank
- Integrated refrigerated dryer improves the quality of air to tools and machinery
- · Easy access cabinet for maintenance and service







08274

08281



SIP COMPRESSOR PARTICULATE & OIL **FILTRATION SYSTEM**

Consists of:

- Particulate filter ≤ 1µm (particle Ø)
- Coalescing filter ≤ 0.01µm (particle Ø)
 Adaptor and housing kit
- · Brackets and fixing kit included

System is wall or compressor mountable See full details to the left (page 26)







VARIABLE SPEED MOTOR



Item No	MODEL	INPUT	MOTOR (IE4)	RECEIVER SIZE	FREE AIR Delivery	MAX. WORKING PRESSURE	NOISE LEVEL
08264	SIP VSDD/RD 7.5kW 8BAR 200LTR with Dryer	400v (32A)	7.5kW (10hp)	200ltr	37CFM (1050ltr/min)	116psi (8bar)	62dB(A)
08271	SIP VSDD/RD 7.5kW 10BAR 200LTR with Dryer	400v (32A)	7.5kW (10hp)	200ltr	32CFM (920ltr/min)	145psi (10bar)	62dB(A)
08269	SIP VSDD/RDF 7.5kW 8BAR 200LTR with Dryer & Filter	400v (32A)	7.5kW (10hp)	200ltr	37CFM (1050ltr/min)	116psi (8bar)	62dB(A)
08280	SIP VSDD/RDF 7.5kW 10BAR 200LTR with Dryer & Filter	400v (32A)	7.5kW (10hp)	200ltr	32CFM (920ltr/min)	145psi (10bar)	62dB(A)
						1	
08266	SIP VSDD/RD 11kW 8BAR 500LTR with Dryer	400v (32A)	11kW (15hp)	500ltr	57CFM (1613ltr/min)	116psi (8bar)	62dB(A)
08272	SIP VSDD/RD 11kW 10BAR 500LTR with Dryer	400v (32A)	11kW (15hp)	500ltr	50CFM (1415ltr/min)	145psi (10bar)	62dB(A)
08277	SIP VSDD/RDF 11kW 8BAR 500LTR with Dryer & Filter	400v (32A)	11kW (15hp)	500ltr	57CFM (1613ltr/min)	116psi (8bar)	62dB(A)
08276	SIP VSDD/RDF 11kW 10BAR 500LTR with Dryer & Filter	400v (32A)	11kW (15hp)	500ltr	50CFM (1415ltr/min)	145psi (10bar)	62dB(A)
08267	SIP VSDD/RD 15kW 8BAR 500LTR with Dryer	400v (63A)	15kW (20hp)	500ltr	75CFM (2123ltr/min)	116psi (8bar)	62dB(A)
08273	SIP VSDD/RD 15kW 10BAR 500LTR with Dryer	400v (63A)	15kW (20hp)	500ltr	66CFM (1868ltr/min)	145psi (10bar)	62dB(A)
08274	SIP VSDD/RDF 15kW 8BAR 500LTR with Dryer & Filter	400v (63A)	15kW (20hp)	500ltr	75CFM (2123ltr/min)	116psi (8bar)	62dB(A)
08281	SIP VSDD/RDF 15kW 10BAR 500LTR with Dryer & Filter	400v (63A)	15kW (20hp)	500ltr	66CFM (1868ltr/min)	145psi (10bar)	62dB(A)

INDUSTRIAL ROTARY SCREW BELT DRIVE COMPRESSORS



ETM II ELECTRONIC CONTROLLER DIGITAL DISPLAY WITH PRESSURE, HOURS, TEMPERATURE RANGES

These highly efficient compressors offer a greater operating range to meet high-demand air requirements and optimise energy usage.

- Silenced cabinet enclosure helps maintain the internal temperature and reduce noise levels
- Belt drive transmission for smooth and efficient operation
- Heavy-duty cooling fan maintains 100% duty cycle
- Front and rear access panels for easy servicing and maintenance
- · Italian-designed and manufactured air ends deliver high constant airflow



			1			1	
Item No	MODEL	INPUT	MOTOR (IE3)	RECEIVER SIZE	FREE AIR Delivery	MAX. WORKING PRESSURE	NOISE LEVEL
05375	SIP RS2.2-10-200BD	230v (16A)	2.2kW (3hp)	200ltr	8.5CFM (240ltr/min)	145psi (8bar)	58dB(A)
05372A	SIP RS4.0-08-200BD	400v (32A)	4kW (5.5hp)	200ltr	20.5CFM (580ltr/min)	116psi (8bar)	60dB(A)
05374	SIP RS4.0-10-200BD	400v (32A)	4kW (5.5hp)	200ltr	17CFM (480ltr/min)	145psi (10bar)	60dB(A)
05376A	SIP RS5.5-08-270BD	400v (32A)	5.5kW (7.5hp)	270ltr	25.4CFM (720ltr/min)	116psi (8bar)	64dB(A)
06201	SIP RS 5.5-10-270BD	400v (32A)	5.5kW (7.5hp)	270ltr	23CFM (650ltr/min)	145psi (10bar)	64dB(A)
06275A	SIP RS08-08-270BD	400v (32A)	7.5kW (10hp)	270ltr	44.1CFM (1,249ltr/min)	116psi (8bar)	68dB(A)
06285	SIP RS08-10-270BD	400v (32A)	7.5kW (10hp)	270ltr	35.3CFM (999ltr/min)	145psi (10bar)	69dB(A)
06387A	SIP RS08-08-500BD	400v (32A)	7.5kW (10hp)	500ltr	44.1CFM (1,249ltr/min)	116psi (8bar)	69dB(A)
06287	SIP RS08-10-500BD	400v (32A)	7.5kW (10hp)	500ltr	35.3CFM (999ltr/min)	145psi (10bar)	68dB(A)
06384A	SIP RS11-08-270BD	400v (32A)	11kW (15hp)	270ltr	58.2CFM (1,648ltr/min)	116psi (8bar)	69dB(A)
06410	SIP RS11-10-270BD	400v (32A)	11kW (15hp)	270ltr	53CFM (1,501ltr/min)	145psi (10bar)	69dB(A)
06302A	SIP RS11-08-500BD	400v (32A)	11kW (15hp)	500ltr	58.2CFM (1,648ltr/min)	116psi (8bar)	69dB(A)
06200	SIP RS11-10-500BD	400v (32A)	11kW (15hp)	500ltr	53CFM (1,501ltr/min)	145psi (10bar)	69dB(A)
06369A	SIP RS15-08-500BD	400v (63A)	15kW (20hp)	500ltr	75.6CFM (2,141ltr/min)	116psi (8bar)	70dB(A)
06269	SIP RS15-10-500BD	400v (63A)	15kW (20hp)	500ltr	65.3CFM (1,841ltr/min)	145psi (10bar)	70dB(A)
06337	SIP RS15-13-500BD	400v (63A)	15kW (20hp)	500ltr	53CFM (1,501ltr/min)	189psi (13bar)	70dB(A)



INDUSTRIAL ROTARY SCREW BELT DRIVE COMPRESSORS WITH DRYERS



ETM II ELECTRONIC CONTROLLER DIGITAL DISPLAY WITH PRESSURE, HOURS, TEMPERATURE RANGES

These highly efficient compressors offer a greater operating range to meet high-demand air requirements and optimise energy usage.

- Silenced cabinet enclosure helps maintain the internal temperature and reduce noise levels
- · Belt drive transmission for smooth and efficient operation
- · Integrated refrigerated dryer improves the quality of air delivered to tools and machinery
- Heavy-duty cooling fan maintains 100% duty cycle
- Front and rear access Panels for easy servicing and maintenance
- · Italian-designed and manufactured air ends delivering high constant airflow



Item No	MODEL	INPUT	MOTOR (IE3)	RECEIVER SIZE	FREE AIR DELIVERY	MAX. WORKING PRESSURE	NOISE LEVEL
05378A	SIP RS4.0-08-200BD/RD	400v (32A)	4kW (5.5hp)	200ltr	20.5CFM (580ltr/min)	116psi (8bar)	60dB(A)
06274	SIP RS4.0-10-200BD/RD	400v (32A)	4kW (5.5hp)	200ltr	17CFM (485ltr/min)	145psi (10bar)	60dB(A)
06267A	SIP RS5.5-08-270BD/RD	400v (32A)	5.5kW (7.5hp)	270ltr	25.5CFM (720ltr/min)	116psi (8bar)	64dB(A)
06303	SIP RS5.5-10-270BD/RD	400v (32A)	5.5kW (7.5hp)	270ltr	23CFM (650ltr/min)	145psi (10bar)	64dB(A)

Item No	MODEL	INPUT	MOTOR (IE3)	RECEIVER SIZE	FREE AIR Delivery	MAX. WORKING Pressure	NOISE LEVEL
06310A	SIP RS08-08-270BD/RD	400v (32A)	7.5kW (10hp)	270ltr	44.1CFM (1,249ltr/min)	116psi (8bar)	68dB(A)
06322	SIP RS08-10-270BD/RD	400v (32A)	7.5kW (10hp)	270ltr	35.3CFM (999ltr/min)	145psi (10bar)	69dB(A)
06412A	SIP RS11-08-270BD/RD	400v (32A)	11kW (15hp)	270ltr	58.2CFM (1,648ltr/min)	116psi (8bar)	69dB(A)
06416	SIP RS11-10-270BD/RD	400v (32A)	11kW (15hp)	270ltr	53CFM (1,501ltr/min)	145psi (10bar)	69dB(A)
06283A	SIP RS08-08-500BD/RD	400v (32A)	7.5kW (10hp)	500ltr	44.1CFM (1,249ltr/min)	116psi (8bar)	68dB(A)
06328	SIP RS08-10-500BD/RD	400v (32A)	7.5kW (10hp)	500ltr	35.3CFM (999ltr/min)	145psi (10bar)	68dB(A)
06430A	SIP RS11-08-500BD/RD	400v (32A)	11kW (15hp)	500ltr	58.2CFM (1,648ltr/min)	116psi (8bar)	69dB(A)
06420	SIP RS11-10-500BD/RD	400v (32A)	11kW (15hp)	500ltr	53CFM (1,501ltr/min)	145psi (10bar)	69dB(A)
06299A	SIP RS15-08-500BD/RD	400v (63A)	15kW (20hp)	500ltr	75.9CFM (2,149ltr/min)	116psi (8bar)	70dB(A)
06263	SIP RS15-10-500BD/RD	400v (63A)	15kW (20hp)	500ltr	65.3CFM (1,849ltr/min)	145psi (10bar)	70dB(A)
06357	SIP RS15-13-500BD/RD	400v (63A)	15kW (20hp)	500ltr	53CFM (1,501ltr/min)	189psi (13bar)	70dB(A)

AIR COMPRESSORS - ACCESSORIES



SIP TRADE & PROFESSIONAL AIR HOSES

Item No	DESCRIPTION	OUTSIDE HOSE DIAMETER	INSIDE HOSE DIAMETER	
04115	SIP Trade Coiled Air Hose - 5mtr Display Pack (1/4" end fittings)	-	-	
07700	SIP Trade 3/8" Workshop Air Hose - 25ft (1/4" end fittings)	10mm (3/8")	6.3mm (1/4")	
07703	SIP Trade 3/8" Workshop Air Hose - 33ft (10m) (1/4" end fittings)	10mm (3/8")	6.3mm (1/4")	SSIP
07701	SIP Trade 3/8" Workshop Air Hose - 50ft (1/4" end fittings)	10mm (3/8")	6.3mm (1/4")	3/8" Workst
07431	SIP Professional 3/8" Air Hose - 5mtr (1/4" end fittings)	10mm (3/8")	6.3mm (1/4")	Sip
07433	SIP Professional 3/8" Air Hose - 10mtr (1/4" end fittings)	10mm (3/8")	6.3mm (1/4")	Air Hose
07435	SIP Professional 3/8" Air Hose - 15mtr (1/4" end fittings)	10mm (3/8")	6.3mm (1/4")	
07437	SIP Professional 3/8" Air Hose - 20mtr (1/4" end fittings)	10mm (3/8")	6.3mm (1/4")	All S
07439	SIP Professional 3/8" Air Hose - 50mtr (1/4" end fittings)	10mm (3/8")	6.3mm (1/4")	



CONNECTION HOSE LENGTH

WORKING TEMPERATURE

MAX. PRESSURE

HOSE FITTINGS

1mtr

300psi (20bar)

1/4" BSP (male)

-5°C to 45°C

AIR COMPRESSORS - HOSE REELS & ELECTRIC CABLE

FLOOR-STANDING DESIGN AIR HOSE REELS

Item No	07970	07979
MODEL	SIP AIR Hose Reel 20	SIP AIR SWIVEL HOSE REEL 30
HOSE LENGTH	20mtr	30mtr
HOSE DIAMETER	8mm	8mm
CONNECTION HOSE LENGTH	1.5mtr	2mtr
MAX. PRESSURE	300psi (20bar)	300psi (20bar)
HOSE FITTINGS	Quick Coupler (Euro)	1/4" BSP (male)
WORKING TEMPERATURE	-5°C to 45°C	-5°C to 45°C
ADDITIONAL FEATURES	CARRY HANDLE Through-flow system	FOLDING HANDLE METAL CASING 360° ROTATING BASE WALL MOUNTABLE DESIGN



2mtr

300psi (20bar)

1/4" BSP (male)


-5°C to 45°C

1mtr

300psi (20bar)

1/4" BSP (male)

-5°C to 45°C

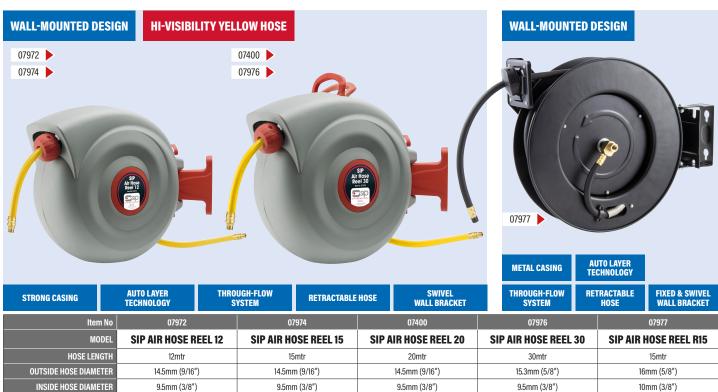

1mtr

300psi (20bar)

1/4" BSP (male)

-5°C to 45°C



2mtr

300psi (20bar)

1/4" BSP (male)

-5°C to 45°C





SIP 1/2" Air Impact Wrench Kit

- Comprehensive 17-piece kit
- 312Nm (23ft/lbs) working torque
- 4.5CFM average air consumption
 85.00mm may appeal appealty.
- 8500rpm max. speed capacity
- 10x 1/2" chrome vanadium sockets:
 9, 10, 11, 13, 14, 17, 19, 22, 24 and 27mm
- 3" extension
- Supplied in blow-moulded case



SIP 73 Piece Air Tool Kit

- 1/2" Air Impact Wrench; 230ft/lbs working torque 8x ½" sockets 3" wrench drive extension
- %" Reversible Ratchet; 50ft/lbs working torque %" and ½" drive socket adaptor; 4x sockets %" screwdriver + 10 screw bits
- 150mm Air Hammer; 4500 blows per/min, 4x chisels
- · Air blow gun; 5x nozzles, 4x bayonets
- Pressure gauge; hex key; PTFE tape
- ¼" air line coupler and jubilee clip



Item No: 06792



SIP 1/4" Air Die Grinder

- Compact, lightweight design, high velocity, low vibration grinder
- 22,000rpm speed
- Rubber-coated lightweight aluminium body
- · Safety lever prevents accidental starts
- · Rear exhaust directs exhaust away from work



Item No: 06713



SIP Air Body Saw

- · Ideal for body shop repair
- 10,000spm
- Anti-vibration cover
- · 6CFM av. air consumption
- 1/4" BSP air inlet
- Cutting capacity: 1.2mm 16 gauge (steel) / 1.6mm 14 gauge aluminium

SIP Air Belt Sander

- 18000rpm no load speed
- 4CFM average air consumption
- 10 x 330mm belt sander with lever throttle control
- Ideal for a variety of materials including steel, aluminium and plastic $\,$
- · Adjustable arm with quick belt tensioning lever
- · ¼" BSP air inlet
- · 90psi (6bar) operating pressure



SIP 6" Air Dual Action Sander

- · Random orbit for swirl-free finish · 10,000rpm working speed
- 6" backing pad included 4CFM av. air consumption



SIP 1/2" Reversible Air Ratchet

- 45ft/lbs (61Nm) working torque 150rpm no-load speed
- 5CFM average air consumption 1/4" BSP air inlet
- Ball and needle bearing for long service life
- Ball and needle bearing for lon
 Easy speed control

SIP Pistol Grip Air Needle Scaler

- Ideal for removal of rust and paint
- 4500blows/min
- · Pistol grip with rubber handle
- 2.8CFM av. air consumption
- ¼" BSP air inlet
- 90psi (6.3bar) operating pressure



SIP 6" Air Palm Sander

- Designed for one-handed operation 10,000rpm working speed
- 6" backing pad included 2.8CFM av. air consumption
- 90psi (6.3bar) operating pressure
- 1/4" BSP air inlet



SIP 2-in-1 Air Nailer/Stapler Kit

2-in-1 magazine design • 100 nail magazine capacity

Touch-strike system for extra safety
Adjustable nail depth
60 to 100psi (3 to 7bar) operating pressure

SIP Sandblast Cabinet

- Convenient tabletop design 230v (13A) supply
- 7CFM av. air consumption
- One piece seamless construction
- Quick and efficient sandblasting, quickly removes rust, paint and other unwanted debris from metal or wood surfaces
- · Automatic air shut-off
- Manufactured from high-quality and heavy-duty steel







Item No: 06771





3 - 4bar (43.5 - 58psi)

operating pressure

• 1/4" BSP air inlet

· 7CFM av. air consumption

Item No: 02131



SIP DIAMOND Spray Gun Professional suction-fed spray gun with 2mm nozzle · 1ltr paint capacity

- 4.5 6bar (65 87psi) operating pressure 1/4" BSP air inlet
- 8.5CFM average air

consumption

Item No: 02132



- · 1ltr paint capacity
- 2.5 3.5bar (36 50psi) operating pressure
- 1/4" BSP air inlet
- 14.7CFM av. air consumption

Item No: 02136



- Professional gravity-fed spray gun with 1.4mm nozzle
- 0.6ltr paint capacity
- 3 4bar (43.5 58psi) operating pressure
- 1/4" BSP air inlet




SIP 5 Piece Air Kit

- 1.5mm suction spray gun with adjustable fluid/air control
- · Inflating gun with rubber-protected gauge and rubber hose
- Degreaser with 1ltr easy clean fluid pot capacity
- Pistol-type duster
- 5m kink-resistant hose, 1/4" female connectors



SIP 100mm Air Duster Gun SIP 300mm Air Duster Gun

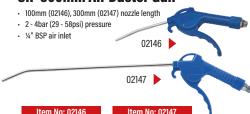

SIP Air Duster Gun

- · Lightweight and general purpose duster gun
- Suitable for cleaning dust, swarf, water and more
- Polished gun body with aluminium pot 50mm nozzle
- Recommended pressure 29 87psi (2 6bar)



SIP Air Brush Set

- 0.8mm nozzle 20ml paint jar capacity
- 15 50psi operating pressure
- . 1.5mtr hose length with adaptor
- · 5mm male air inlet
- · 2x paint jars included
- Supplied with storage box



SIP Trade Engine Cleaning Gun

- General purpose engine cleaning gun for cleaning, degreasing or can be used as a duster . Large 950ml container
- Recommended pressure 29 87psi (2 4bar)



SIP Professional Calibrated Tyre Inflator

- Gauge calibration specification UNI EN 12645
- Max. pressure 174psi (12bar)
- WIKA gauge reading bar/psi
- Shock-resistant dial rubber casing
- 73mm gauge diameter
- 1mtr heavy-duty hose
- 1/4" BSP air inlet

CALIBRATED CERTIFICATE INCLUDED · 1mtr heavy-duty hose ¼" BSP air inlet

SIP Tyre Inflator

- · General purpose tyre inflating gun
- air inlet



SIP Maxi-Flate Tyre Inflator

- Professional inflating gun
- WIKA gauge reading bar/psi Shock-resistant dial rubber casing



Item No: 02169


WIKA GAUGE READING BAR/PSI









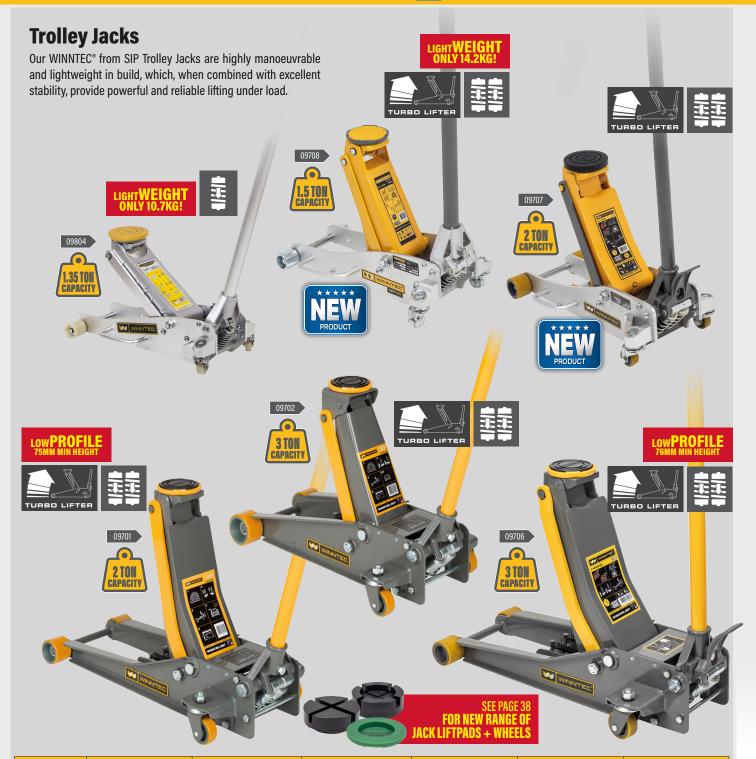

Item No	09804 (Y411350)	09708 (M411355)	09707 (Y411202)	09701 (Y420250)	09702 (Y420330)	09706 (Y420333)
MODEL	1.35 Ton Aluminium Racing Trolley Jack	1.5 Ton Aluminium & Steel Trolley Jack	2 Ton Aluminium & Steel Trolley Jack	2 Ton Low-Profile Turbo-Lift Trolley Jack	3 Ton* Turbo-Lift Trolley Jack	3 Ton Low-Profile Turbo-Lift Trolley Jack
LIFTING HEIGHT	80 - 375mm	90 - 360mm	86 - 418mm	75 - 510mm	120 - 450mm	76 - 503mm
WEIGHT	10.7kg	14.2kg	22kg	32kg	32kg	36.5kg
USAGE	-	P	-	7	100	
ADDITIONAL FEATURES	SIDE CARRY HANDLE CHROME-PLATED PISTON PUMP NON-MARKING NYLON WHEELS	TURBO-LIFT SYSTEM SIDE CARRY HANDLE CHROME-PLATED PISTON PUMP STEEL WHEELS	TURBO-LIFT SYSTEM SIDE CARRY HANDLE CHROME-PLATED PISTON PUMPS POLYURETHANE WHEELS	LOW-PROFILE DESIGN TURBO-LIFT SYSTEM CHROME-PLATED PISTON PUMPS POLYURETHANE WHEELS	TURBO-LIFT SYSTEM CHROME-PLATED PISTON PUMPS POLYURETHANE WHEELS	LOW-PROFILE DESIGN TURBO-LIFT SYSTEM 2-SPEED CONTROLLED DESCENT CHROME-PLATED PISTON PUMPS POLYURETHANE WHEELS





Air Hydraulic Pump

700bar (10,000psi) capacity

6 - 10bar working pressure

· 1600cc effective working oil



Integrated internal release

· Two-stage release mechanism

• 1/4" air inlet and 3/8" air outlet

WINNTEC® LIFTPADS



X Liftpad

- X-groove maintains precise alignment to vehicle lift point
- Rigid pad mounts firmly to trolley jack for a stable hold



S Liftpad

- Features an X-groove and adaptor slot allowing for multi-purpose use
- Centred magnet underneath pad ensures a secure hold to trolley jack

X Liftpad (For 09701, 09702, 09706, 09707)

EV Liftpad (For 09701, 09702, 09706, 09707)

Replacement Saddle Pad (For 09804)

Replacement Saddle Pad (For 09701, 09706)

Replacement Steel Wheel Set (For 09706, 09701)

TROLLEY JACK ACCESSORIES

S Liftpad (For 09704, 09708)



EV Liftpad

- Designed for lifting vehicles that require a manufacturer's adaptor
- Magnets underneath pad ensure a secure hold to trolley jack



Hose Assembly for 09831

- · Ultra-strong all metal connectors
- · High-strength hosing for durability
- WINNTEC 3 Year warranty





Item No

09709 (Y490000)

09710 (Y490020)

09711 (Y49010EV)

HY01-00456

HY01-00472

HY03-00005

SUPPLIED IN PAIRS

HY01-00456

HY01-00472

HY03-0000

- · Precision robotic welded
- Solid stand bar with 4 locking positions
- Heavy-duty PU saddle padAlso suitable for EV'sHeight: Min: 300mm 451mm
- Base Ø: 310mmMax. capacity: 3 Ton
- Weight 9kg (4.5kg each))WINNTEC 3 Year warranty



3 Ton / 6 Ton Pin Type Jack Stands

- Pin-type support column
- Adjusts to multiple heights
 Lift height range: 322 - 465mm (3 Ton)



3 TON No: 09847 (Y452300) 6 TON No: 09849 (Y452600)

12 Ton Trolley Jack Stands

SUPPLIED IN PAIRS

- 12 Ton lifting capacity
- 302 450mm lifting height range
- 22cm square base for added stability
- Wheel-mounted for easy movement
 Pin-type support column
 adjusts to five different
- height positions
- Handle included
- WINNTEC 3 Year warranty





12 Ton High-Reach Trolley Jack Stand

SUPPLIED IN SINGLES

- 12 Ton lifting capacity
- 601 971mm lift height range
- Pin-type support column
- Multi-angle handle socket and wheels for easy positioning under vehicles
- · Adjusts to multiple heights
- Handle included
 WINNTEC 3 Year warranty
- William Co Tour Wallan





09704

12 TON







24 Ton **Air Service Jack**

- 24 Ton max. weight capacity
- 141mm to 441mm lifting height range
- 3 extensions; 20mm, 50mm,
- and 100mm 1-stage heavy-duty hydraulic lifting system
- Hydraulically-assisted components allow the jack to ascend/descend with air
- · Built-in dead-man controls
- Heavy-duty hard chromed piston and ram
- WINNTEC 3 Year warranty



10 Ton Long Chassis Jack · Universal joint release valve

- 10 Ton weight capacity
- 160mm min. jack height
- 680mm max. jack height · Foot-operated pump for
- efficient lifting · Swivel castors for easy movement
- · Automatic overload safety valve
- · Integrated load control knob Steel wheels
- WINNTEC 3 Year warranty



· Aluminium air motor

· Polished main ram

No: 09844 (Y432003)

Air Bottle Jack

· 20 Ton weight capacity

253mm minimum jack height



Automotive & Commercial Vehicle Bottle Jacks

- · Can be used horizontally and vertically
- Solid chrome pump linkage

No: 09886 (Y421000)



- · Cast iron bases
- WINNTEC 3 Year warranty



Item No	09843 (Y411200)	09818 (Y412000)	09820 (Y413000)	09865 (Y411000)	09833 (Y412001)
MODEL	12 Ton Bottle Jack	20 Ton Bottle Jack	30 Ton Bottle Jack	10 Ton Low-Profile Bottle Jack	20 Ton Low-Profile Bottle Jack
LIFTING HEIGHT	214 - 399mm	244 - 449mm	285 - 465mm	120 - 260mm	190 - 340mm
SCREW EXTENSION	60mm	60mm	-	45mm and 6mm	60mm
WEIGHT	7.2kg	10.5kg	14.6kg	6.6kg	9kg
USAGE	₽	→ 🃭	Up	→ !	₩

32/16 Ton Telescopic **Air Service Jack**

- · 32 / 16 Ton max. weight capacit · 150mm to 289mm lifting
- height range
- 2 extensions supplied; 45mm and 100mm
- Dual-stage telescopic hydraulic
- lifting system

 Hydraulically-assisted components allow the jack to ascend/descend with air

 Built-in dead-man controls
- Heavy-duty hard chromed piston and ram
- Optional 260mm extension sold separately
- WINNTEC 3 Year warranty



No: 09893 (Y432032)









Smart Tyre & Wheel Cart

- Patented LOADSHIFT™ Tilting System
- · High-quality construction
- Push-Slide secure locking
- · Non-marking durable wheels with industrial bearings
- Powder-coated steel frame
- · Weighs only 20kg
- Supports 14" to 20" wheels
- · Extender kit available
- WINNTEC 3 Year warranty



LOADSHIFT" TILTING SYSTEM MAKING IT EASIER TO TILT AND MANOEUVRE HEAVY TYRES AND WHEEL ASSEMBLIES WITH MINIMAL EFFORT

Hydraulic Truck Wheel Dolly

- 150kg weight capacity
 680mm dolly frame width
- 470mm dolly frame depth - 280mm dolly frame height
- · Carry handle and belt
- · Compact hydraulic unit for positioning
- · Shock-absorbing castors
- · Frame allows for short working distance
- Ergonomic design
- Ideal for emergency road assistance work
- Lightweight and portableWINNTEC 3 Year warranty





COMPACT & MOBILE DESIGN





Manual Wheel Dolly

- · Heavy-duty industrial wheel dolly
- Capable of moving up to 220kg Fast and efficient way to remove wheels
- · Ergonomics reduce strain and prevent injury
- · Extended rollers are ideal for wide base tyres
- · Rollers can have 3 positions for different wheels
- · Rubber wheels with unique steel core
- · Industrial bearings, Japanese origin
- Optimal lifetime performance
- · Quick detach handle
- · WINNTEC 3 Year warranty



No: 09832 (Y471105)



40

*BAD OBSESSION View it in Action at...



AUTOMOTIVE - LIFTING & GARAGE EQUIPMENT



• 95 - 470mm lifting height range

· Extra-large saddle with rubber pad · 2-piece handle with rubber bumper

- Heavy-duty wheels and castors
- Safety bypass system prevents the jack from overloading

Item No: 03623



SIP 3 Ton Low-Profile Trolley Jack · Dual piston pump increased efficiency and durability Quick-Lift system raises saddle to vehicle lifting point Heavy-duty steel construction for added reliability 70 - 508mm lifting height Extra-large saddle with rubber pad 2-piece handle with rubber grip Heavy-duty wheels and castors Safety bypass system prevents the jack from overloading QUICK-LIFT SYSTEM

SIP 5 & 10 Ton Long Floor Jacks

- Quick-Lift pedal gives rapid initial saddle lift to vehicle contact point
- · Extra-long handle for easy access under large vehicles
- Rear toe plate for easy positioning
- · Release knob · Handle lock
- · Extra-large saddle
- diameter
- · Large diameter wheels



Item No	03642	03647
MODEL	SIP 5 Ton Floor Jack	SIP 10 Ton Floor Jack
LIFTING CAPACITY	5 Ton	10 Ton
LIFTING HEIGHT	150 - 560mm	160 - 560mm
SADDLE DIAMETER	130mm	150mm

SIP **Transmission Adaptor**

- Fully adjustable gearbox support with forward, backward and side-to-side tilt
- For use with: 03871 and 03690 Transmission



Item No: 03869

SIP 22 Ton Pneumatic Floor Jack

- 22 Ton maximum weight capacity
- · 230 555mm lift height range • 115mm screw extension is included
- 9.5CFM maximum air consumption
- 7 to 10bar working air pressure
- · Non-marking durable rubber wheels
- · Compact and low-profile jack design Air-line hook and air control valve
- Handle lock and release control
- Solid and durable construction





SIP 500kg Transmission Jack

- 1175 1995mm lifting height
- Heavy-duty hydraulic cylinder
- · Oversized foot pedal for easy lifting
- Knurled air release valve



SIP 500kg Quick-Lift Heavy-Duty **Transmission Jack**

- Quick-Lift system raises cradle to the vehicle lifting point via single stroke foot pedal
- Heavy-duty base · 1250 - 2040mm lifting height

Spring-loaded release valve

Heavy-duty wheels **50**% **FASTER** Optional Extra - 03869 QUICK Transmission Adaptor



SIP 1 Ton Heavy-Duty Transmission Jack with Adaptor

- · Heavy-duty base
- · 1258 2145mm lifting height
- · Spring-loaded release valve



SIP Bottle Jacks

A range of powerful and compact bottle jacks with built-in safety valves and serrated saddles for secure contact with load. Screw extensions for adjustable starting height.




Item No	03667	03656	03658	03660
MODEL	SIP 4 Ton Bottle Jack	SIP 8 Ton Bottle Jack	SIP 12 Ton Bottle Jack	SIP 20 Ton Bottle Jack
LIFTING HEIGHT	183 - 354mm	205 - 400mm	210 - 415mm	242 - 470mm
SCREW EXTENSION	60mm	60mm	60mm	60mm
WEIGHT	3.2kg	5.4kg	7.2kg	11kg

SIP Universal Utility Support Stand

- Designed to support components when working under a vehicle
 Fold-up pedal for easier storage
 Slim design ideal for working in tight spaces

- Capacity: 680kg
- Min height: 1365mm

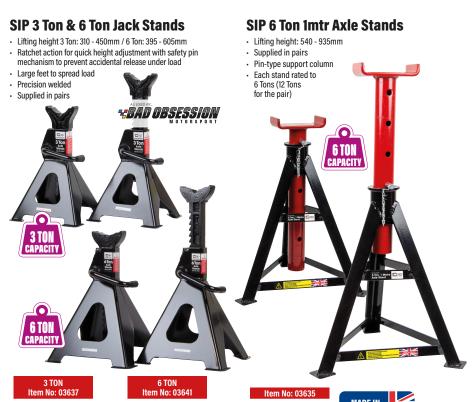







AUTOMOTIVE - LIFTING & GARAGE EQUIPMENT



SIP 1 Tonne Mobile Gantry Crane

For multiple workshop applications including maintenance, repair, servicing, material handling and manufacturing. Heavy-duty painted steel construction with "I" section crossbeam





1 TON

Sturdy manual push-pull beam trolley.
Suitable for "I" section and RSJ beams

4x heavy-duty bearing mounted wheels

- · Fitted with wheel guards
- · Capacity: 1 Tonne
- · Min. "I" beam width: 64mm
- Max. "I" beam width: 140mm
- · Weight: 13kg

SIP 1 Tonne Chain Block (for 03849)

Chain block assembly with manual chain lift

- · Safe working load 1 Tonne · Head room- 317mm
- Load chain diameter: 6mm Max. hook capacity Ø: 40mm



4BAD OBSESSION View it in Action at...

AUTOMOTIVE - LIFTING & GARAGE EQUIPMENT

SIP 12 Ton Hydraulic Pipe Bender

- · Floor-standing pipe bender with heavy-duty steel chassis
- High-quality 12 Ton hydraulic ram
- Suitable for bending pipe from 0 $1\!\!/_2$ " up to 0 2"
- Supplied with six formers for added versatility
- Former sizes ½", ¾", 1", 1¼", 1½", 2"
- · External return springs

Item No: 03683

12 TON CAPACITY

SUPPLIED WITH 6 FORMERS

SIP Car Wheel Dollies

- · 450kg capacity per dolly
- · Supplied in pairs

Item No: 03833



SIP 10 Ton Auto Body Repair Kit




- · 520mm max. ram length
- Polished hydraulic ram and cylinder to reduce abrasion
- Built-in safety valve
- Supplied in a heavy-duty all-metal storage case

Item No: 03679



SIP 20 Gallon Parts Washer

- · High 136ltr/hr (30 gallon) pumping rate for stubborn debris
- · Large 90ltr (20 gallon) capacity for a variety of workpieces
- Self-latching lid with fusible link which shuts in the event of fire
- Floor-standing design with a space-saving reduced footprint





SIP Advanced Hydraulic Oil

- · 1ltr quality advanced hydraulic oil bottle
- Specialist lubrication with a good flow rate
- · Offers high performance
- and added stability · Exceptional rust and

corrosion resistance

SIP Parts Washer Solvent 10ltr

· Ideal for use with SIP Parts Washer



TIGREN 70ltr Suction Oil Drainer

- 22psi (1.5bar) discharge pressure
- 116psi (8bar) / 145psi (10bar) extraction pressure
- 1040 1500mm height adjustment
- 70ltr reservoir tank
- Waste oil level indicator
- Pneumatic suction function with 5 extraction tubes
- Pneumatic waste oil discharge





BAD OBSESSION

SIP Car Creeper

- Durable oil-resistant vinyl cover
- · Solid rectangular frame for added strength



SIP Sandblast Cabinet

- · Convenient table top design
- 230v (13A) supply
- · 7CFM av. air consumption
- · One piece seamless construction
- Quick and efficient sandblasting, quickly removes rust, paint and other unwanted debris from metal or wood surfaces
- · Automatic air shut-off
- Manufactured from high-quality and heavy-duty steel





TO PLACE AN ORDER: (3) 01509 500500









ITEM No.	03700	03711	03722	
MODEL	SIP 80 LITRE Gravity oil Drainer	SIP 80 LITRE Suction/Gravity oil Drainer	SIP 80 LITRE SUCTION/GRAVITY OIL DRAINER WITH INSPECTION CHAMBER	
COLLECTION TRAY CAPACITY	20ltr			
COLLECTION TRAY HEIGHT RANGE	1195 - 1810mm	1190 - 1810mm	1500 - 1810mm	
DISCHARGE PRESSURE	10 - 15psi (0.7 - 1bar)			
DISCHARGE HOSE LENGTH		2.2mtr		
SUCTION PRESSURE	n/a	3	37 - 145psi (6 - 10bar)	
SUCTION HOSE LENGTH	n/a		2.2mtr	
COLLECTION TANK CAPACITY	80ltr			
WORKING TEMPERATURE (engine oil)	40°C to 60°C			
ADDITIONAL FEATURES		OIL LEVEL INDICATOR TUBE INTEGRATED PARTS TRAY WHEEL KIT WITH SWIVEL CASTOR:	S	



03650

Perfect for bending, bonding and straightening.

- Rugged steel frames
- · Adjustable workbeds
- Glycerine-filled manometers







					WOSEIMIDLEN	WOSEIMIDLEN	ASSEMBLED
Item No	03650	03651	03689	03695	03691	03696	03686
MODEL	SIP 10 Ton Bench Press	SIP 12 Ton Shop Press	SIP 20 Ton Shop Press	SIP 30 Ton Shop Press	SIP 45 Ton Shop Press	SIP 75 Ton Shop Press	SIP 100 Ton Shop Press
CAPACITY	10 TON	12 TON	20 TON	30 TON	45 TON	75 TON	100 TON
RAM STROKE	180mm	180mm	185mm	150mm	190mm	250mm	300mm
WORK RANGE	0 - 340mm	0 - 918mm	29.5 - 989.5mm	151 - 1031mm	159 - 859mm	160 - 880mm	93 - 993mm
PRESS TYPE	Bench	Floor	Floor	Floor	Floor	Floor	Floor
OPERATION	Manual	Manual	Manual	Pneumatically-assisted	Pneumatically-assisted	Pneumatically-assisted	Pneumatically-assisted

SUPPLIED FULLY



100 TON Shop Press

Heavy-duty 100 Ton capacity for industrial applications. Ideal for bending thicker materials and assembling and pressing larger machinery components.

100 Ton

· Foot-operated press to free both hands for precise workpiece positioning

SIP Hydraulic Spring Compressor

Designed with a compact but heavy-duty frame for garages and workshops where floor space is limited.

In comparison to manual compressors, this compressor offers higher efficiency and simpler, safer use thanks to fast one-man operation.

- 1000kg (2204lb) capacity
- 480mm max. working length
- · 325mm ram travel
- Use with 4" (101mm) 10" (254mm) spring size



1000KG CAPACITY

4" - 10" SPRING SIZE

Item No: 03638



- 2400kg maximum compression
- 5 10bar twin pneumatic rams
- Safety cage interlock switch for maximum safety
- · Patented coil spring claw designs
- Movable foot plate for positioning
- Retention cable for holding spring
- · Steel carabiners for locking cable
- · Ideal for cars, SUVs and vans





SUITABLE FOR LARGER SPRINGS ARS, SUVs & VANS ETC

PATENTED DESIGN







SIP Professional Coil Spring Compressor Universal Top Plate

No need for multiple claws or clamps for different vehicles.

With this attachment you can compress almost any coil spring!

Optional for use with 03661







Boost the efficiency of on-site fuelling and maintain accurate records of diesel usage throughout your facility. Using a compact design, SIP's range of Diesel Transfer Pumps easily install onto an existing storage unit for convenient dispensing using either 12v, 24v or 230v power supplies.

PORTABLE DESIGN FOR EASY FUEL TRANSFER

06801, 06803

- Powerful 12v or 24v DC motor options, with copper-wound armatures for optimum performance
- · Compact and lightweight design for portability
- High-quality aluminium nozzle ensures strength and durability
- · Supplied with non-return valve to aid self-priming





PORTABLE & WALL MOUNTABLE DESIGN

06805, 06807

- Powerful 12v DC (06805) or 230v AC (06807) motor options, with copper-wound armatures for optimum performance
- · Compact design with easy wall-mountable bracket
- · Accurate flow meter with 4 digit subtotal and 8 digit grand total display
- Supplied with non-return valve to aid self-priming
- 2mtr suction hose, 4mtr delivery hose



INTEGRATED FILLER NOZZLE HOLSTER







ITEM No.	06801	06803	06805	06807
MODEL	SIP 12V DIESEL Transfer Pump	SIP 24V DIESEL Transfer Pump	SIP 12V DIESEL Transfer Pump With Fuel Meter	SIP 230V DIESEL Transfer Pump With Fuel Meter
INPUT VOLTAGE	12v DC	24v DC	12v DC	230v AC
MOTOR POWER	160w	160w	160w	550w
MAX. PUMPING HEAD	10mtr	10mtr	10mtr	15mtr
MAX. FLOW RATE	40ltr/min	40ltr/min	40ltr/min	60ltr/min
MOTOR SPEED	3200rpm	3200rpm	3200rpm	2850rpm
MAX. WORKING PRESSURE	15psi (1bar)	15psi (1bar)	15psi (1bar)	22psi (1.5bar)
CONNECTION	3/4" BSP	3/4" BSP	3/4" BSP	1" BSP
SUCTION HOSE LENGTH	2mtr	2mtr	2mtr	2mtr
DELIVERY HOSE LENGTH	4mtr	4mtr	4mtr	4mtr
WEIGHT	7.15kg	7:10kg	12.50kg	16.90kg





Compact, easy to use and featuring a high-flow 50ltr/min transfer pump, SIP's Portable Diesel Tanks are perfect for agricultural and commercial vehicle settings, plus boatyards and marinas.

Suitable for fuel transfer applications, they're ideal for securing on the back of a flatbed van, trailer or open back pick-up truck for fast and efficient use.

• 12v DC high-flow 50ltr/min transfer pump, with 5mtr connection leads*

· High-quality aluminium nozzle ensures strength and durability

· Fuel gauge to monitor usage

- · Hinged lid for easy access to the pump
- Locking clasps to secure and restrict access
- Internal enclosure for 12v transfer pump, fuel nozzle and diesel filling point
- Lifting handles for two man lift when tank is empty and forklift channels (06950)
- Lifting eyes for slings and forklift channels for easy work area movement (06951)















INTERNAL ENCLOSURE FOR 12V TRANSFER PUMP, FUEL NOZZLE & DIESEL FILLING POINT









ITEM No.	06950	06951
MODEL	SIP 200LTR PORTABLE DIESEL TANK WITH HIGH-FLOW 12V TRANSFER PUMP	SIP 430LTR PORTABLE DIESEL TANK WITH HIGH-FLOW 12V TRANSFER PUMP
INPUT VOLTAGE	12v DC	12v DC
MOTOR POWER	300w	300w
TANK CAPACITY	200ltr	430ltr
MAX. FLOW RATE	50ltr/min	50ltr/min
SPEED	3200rpm	3200rpm
MAX. WORKING PRESSURE	15psi (1bar)	15psi (1bar)
MAX. PUMPING HEAD	13mtr	13mtr
CONNECTION	3/4" BSP	3/4" BSP
DELIVERY HOSE LENGTH	3.7mtr	4mtr
WEIGHT	30.7kg	51.75kg

AUTOMOTIVE - INDUCTION HEATERS



SAFE AND EASY TO USE

Perfect for releasing seized fixings, components and parts from vehicles in car and commercial environments. Also suitable for metalworking heat treatments such as annealing and shrink fitting.

Easy to control and highly efficient, induction heaters offer greater levels of safety compared to oxyacetylene and other methods which use a naked flame.

Our range features handheld and portable models which are easy to use around automotive and metalworking workshops.



Item No	01161	01156	01157
MODEL	SIP 1200W HANDHELD INDUCTION HEATER KIT	SIP 1500W INDUCTION HEATER KIT	SIP 3700W Induction Heater
INPUT SUPPLY	230v (13A)	230v (13A)	230v (16A)
INDUCTION POWER	1.2kW	1.5kW	3.7kW
POWER STEPS	Fixed	Fixed	Infinitely Variable
TIME TO HEAT (M8 bolt @ 300°C)	120secs	60secs	30secs
INDUCTION CABLE LENGTH	n/a	850mm	2mtr
POWER CABLE LENGTH	3mtr	3mtr	3mtr
COOLING SYSTEM	Fan Cooled	Fan Cooled	Liquid Cooled Torch and Cable
INVERTER VENTILATION	Cooling Fan	Cooling Fan	Twin Cooling Fans

SIP INDUCTION HEATER CONSUMABLES



Item No	FOR USE WITH 01161 & 01156
HY02-00930	SIP 1000mm Induction Flexi Coil
HY02-00932	SIP Induction Coil Pad
HY02-00933	SIP Induction Flat Coil
HY02-00934	SIP Induction Hooked Coil
HY02-00938	SIP 23mm Induction Coil Straight
HY02-00942	SIP 45mm Induction Coil Straight



Item No	FOR USE WITH 01157
HY02-00943	Pad Coil Holder Extender
HY02-00944	Pad Coil Inclined
HY02-00945	Pad Coil Flat

SEE WEBSITE FOR FULL RANGE OF INDUCTION HEATER CONSUMABLES

BOOSTING & FROM SIP

OUR INNOVATIVE RANGE INCLUDES THE FOLLOWING TECHNOLOGIES:



CAPACITOR BOOSTERS



Quick Charge from a vehicle battery in little as 15sec



Lightweight and hand-portable



Long operating life -1 million boost cycles

WATCH VIDEO



SEE IT TO BELIEVE IT



PAGES 52-53

AGM BOOSTERS

- Purposely designed for high cranking rates
- Proven reliable technology

- ₹ 12v DC outlets run devices directly from the booster
- Range features the iconic SIP Rescue Pac 3000



PAGES 54-55

Microprocessor-controlled automatic charging cycles for easier, faster & safer charging

PAGE 58

TRADITIONAL

Transformer-based robust technology for effective vehicle battery charging



PAGE 56

- Microprocessor-controlled automatic charging cycles for easier, faster & safer charging
- One-person boost-start operation

PAGE 57

TRADITIONAL

Established analogue technology for a direct approach to vehicle charging and boosting

PAGE 59

* based on unit with 70% - 80% charge (under 2 minutes quick-charge from flat)



CAPACITOR (ULTRACAPACITOR) PRO BOOSTER PACKS

ADVANTAGES:

- · High current superconductor design
- · No internal battery: maintenance-free
- Fast recharge: 15 seconds from a running vehicle*
- Unlimited shelf life

- · High quality leads & clamps: for increased performance
- Long product lifespan: over 1 million life cycles
- · Lightweight: range from 5 to 20kg

You Tube

SIP SC PRO BOOSTERS 8000 (12V)

- Rechargeable capacitor booster, high current superconductor design suitable for boosting cars and small vans
- · LED charge rate indication
- ON/OFF switch and built-in safety fuse on positive clamp
- · Heavy-duty cables and clamps
- Lightweight and compact design
- · Supplied with fully automatic charger











SIP SC PRO BOOSTERS 18000 & 18002XP (12/24V)

 Rechargeable capacitor booster, high current, superconductor design suitable for boosting cars and HGV's

- Digital voltmeter

· ON/OFF switch and built-in safety fuse

- Heavy-duty cables and clamps
- Reverse polarity alarm (07106 and 07107)
- Lightweight and compact design
- Supplied with fully automatic charger
- Extendable handle and wheels (07106)









ITEM NO.	0/103	0/10/	0/100
MODEL	SIP SC PRO BOOSTER 8000 12v	SIP SC PRO BOOSTER 18000 12v/24v	SIP SC PRO BOOSTER 18002XP 12v/24v
BOOST PEAK RATE	8000A	18000A (12v) / 9000A (24v)	18000A (12v) / 9000A (24v)
CRANKING/START RATE	1400A	4400A (12v) / 3400A (24v)	4400A (12v) / 3400A (24v)
CAPACITORS	18x 800F ultracapacitors	10x 3400F ultracapacitors	10x 3400F ultracapacitors
PROTECTION	Reverse polarity alarm and indication	Reverse polarity alarm and indication	Reverse polarity alarm and indication
WEIGHT	5kg	14.7kg	20.2kg
EDECITENT IIS AGE WITH	800		
FREQUENT USAGE WITH	5-5-		

52



CAPACITOR (ULTRACAPACITOR) **HAND HELD BOOSTER PACKS**

ADVANTAGES:

· Lightweight capacitor energy cell

• No internal battery: maintenance-free

- Ready for use in as little as 60 seconds



ITEM No.	07001	07003	07005
MODEL	SIP 600A 12V Capacitor Booster	SIP 1000A 12V CAPACITOR BOOSTER	SIP 1600A 12V CAPACITOR BOOSTER
BOOST PEAK RATE	600A	1000A	1600A
CRANKING/START RATE	300A	500A	800A
INPUT	> 6v DC	> 6v DC	> 6v DC
OUTPUT	12v Engine Start	12v Engine Start	12v Engine Start
CAPACITOR CHARGE TIME (based on 70Ah battery)	60sec	90sec	140sec
WEIGHT	0.68kg	1kg	1.75kg
FREQUENT USAGE WITH	86		

AGM (ABSORBENT GLASS MAT) **BOOSTER PACKS**

ADVANTAGES:

- Purpose-designed & manufactured batteries: high cranking rate
- Robust ABS casing: shockproof
- · Quality leads & clamps: increased performance
- · Proven technology: reliability

- Reverse polarity alarm: audible alert for workshop environments
- 12V DC power take-off: powers devices direct from the booster



SIP RESCUE PAC 1600

- Rechargeable AGM portable rescue pack for boost starting cars
- 12v DC portable power supply power devices direct from the booster
- · LED charge rate indication
- Rugged, durable design
- 12 month warranty on maintained batteries only



SIP PRO BOOSTERS 2513 & 3100



- Rechargeable AGM portable professional booster for boost starting cars
- 12v DC portable power supply power devices direct from the booster
- Copper-cored cables and heavy-duty clamps for increased performance
- LED charge rate indication
- Robust ABS casing durable and shockproof
- Supplied with mains <u>FAST</u> charger (07172 & 07173)
- 12 month warranty on maintained batteries only





MODEL	SIP RESCUE PAC 1600 12v	SIP PRO BOOSTER 2513 12v	SIP PRO BOOSTER 3100 12V
BOOST PEAK RATE	1600A	2500A	3100A
CRANKING/START RATE	700A	1000A	1170A
BATTERY VOLTAGE	12v	12v	12v
BATTERY CAPACITY	True 22Ah	True 22Ah	True 25Ah
OUTPUT SOCKET	12v DC	12v DC	12v DC
PROTECTION	-	Reverse polarity	Reverse polarity
FREQUENT USAGE WITH			



SIP RESCUE PAC 3000

- Rechargeable AGM portable rescue pack for boost starting cars & trucks
- 2x 12v DC portable power supply power devices direct from the booster
- LED charge rate indication
- · Rugged, durable design
- · Heavy-duty leads and clamps and rear storage hooks






SIP PRO BOOSTERS 5024, 6200 & 6400

- Rechargeable AGM portable professional booster for boost starting cars & trucks
- 12v DC portable power supply power devices direct from the booster
- Copper-cored cables and heavy-duty clamps for increased performance
- Digital voltmeter





- Extendable handle and wheels (07178)

- Supplied with mains **FAST** charger







ITEM No.	03937	07192	07174	07178
MODEL	SIP RESCUE PAC 3000 12v/24v	SIP PRO BOOSTER 5024 12v/24v	SIP PRO BOOSTER 6200 12v/24v	SIP PRO BOOSTER 6400 12v/24v
BOOST PEAK RATE	3000A (12v) / 1500A (24v)	5000A (12v) / 2500A (24v)	6200A (12v) / 3100A (24v)	6400A (12v) / 3200A (24v)
CRANKING/START RATE	1200A (12v) / 600A (24v)	1680A (12v) / 840A (24v)	1880A (12v) / 940A (24v)	3050A (12v) / 1525A (24v)
INTERNAL BATTERY VOLTAGE	12v / 24v	12v / 24v	12v / 24v	12v / 24v
BATTERY CAPACITY	True 2x 22Ah	True 2x 22Ah	True 2x 25Ah	True 2x 33Ah
OUTPUT SOCKET	2x 12v DC	12v DC	12v DC	12v DC
PROTECTION	Reverse polarity alarm & indication	Reverse polarity alarm & indication	Reverse polarity alarm & indication	Reverse polarity alarm & indication
FREQUENT USAGE WITH				
	0 - 6 - 6 - 6 - 6 - 6 - 6 - 6 - 6 - 6 -		0 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6	

Powerful and portable digital battery chargers designed for charging all types of Lead Acid batteries. Featuring intelligent microprocessorcontrolled automatic charging cycles to make battery charging easier, faster and safer.

- CALCIUM START STOP
 - Designed for 6v, 12v and 24v Lead Acid batteries
 - Powerful and portable chargers for car and commercial vehicles
 - · Features microprocessor-controlled automatic charging cycles
 - Built-in protection features to maximise user safety
 - Battery auto-detect intelligently recognises 12v or 24v (03556)



ITEM No.	03502	03506	03556
MODEL	SIP CHARGESTAR D10	SIP CHARGESTAR D15	SIP CHARGESTAR D40
INPUT SUPPLY	220-240v AC, 50-60Hz, 220w MAX.	220-240v AC, 50-60Hz, 220w MAX.	220-240v AC, 50-60Hz, 750w MAX.
CHARGING VOLTAGE	6v/12v	12v	12v/24v
MAX. CHARGING CURRENT	5A (@6v) / 10A (@12v)	15A	40A (@12v) / 20A (@24v)
CHARGING STEPS	6	6	8
BATTERY TYPE AUTO DETECT	x	x	✓
INTELLIGENT MICROPROCESSOR	✓	✓	✓
ALTERNATOR TEST FUNCTION	х	x	✓
RECONDITIONED MODE	✓	✓	✓
REVERSE POLARITY PROTECTION	✓	✓	✓
IP RATING	20	20	20
USAGE			



STARTMASTER DIGITAL STARTER/CHARGERS

COMPATIBLE
WITH

ALL LEAD ACID

ALL

Powerful bench-top and wheel-mounted digital starter chargers designed for charging and boosting Lead Acid and Lithium-Ion battery types.

- Low 1v voltage detection improves likelihood of recovering batteries unwilling to power
- Automatically diagnoses battery condition and voltage before beginning a charging cycle
- Battery type auto-detect intelligently recognises 12v or 24v versions
- Alternator check mode indicates alternator health and functionality
- · Features microprocessor-controlled automatic charging cycles





ITEM No.	03584	03585	03586	03587
MODEL	SIP STARTMASTER DSC200B	SIP STARTMASTER DSC250B	SIP STARTMASTER DSC350B	SIP STARTMASTER DSC600B
INPUT SUPPLY		230v	50Hz	
OUTPUT VOLTAGE (Charging & Engine Start)	6v/12v/24v		12v/24v	
FUNCTIONS	10 Stage Charging and Boosting Cycle, Alternator Health Check Mode			
	ENGINE START			
MAX. START CURRENT	200A	280A	400A	620A
INPUT CURRENT	20A	26A	32A	44A
RECOMMENDED PLUG		230v (32A) not supplied		230v (63A) not supplied
		CHAF	RGING	
CHARGING CURRENT	20A	25A	25A	50A
CHARGING RANGE	5A - 10A	5A - 15A	5A - 20A	10A - 30A
BATTERY RANGE	20 - 350Ah		50 - 550Ah	
RECOMMENDED PLUG	230v (13A) not supplied			
CHARGE USAGE				

13A 230v



- 12v / 24v dual charging voltage
- 85Ah (05530 P24) / 110Ah (05531 P32) max. rated battery capacity
- · 2 powerful charging rate settings
- 8.5A rated output / 12.5A max. rated output (05530 P24) 11A rated output / 16A max. rated output (05531 - P32)
- · Heavy-duty charge leads and clips
- Reliable reverse polarity protection
- · Integrated ammeter for clear levels
- · Perfect for garages and workshops



GX ADVANCED BATTERY CHARGERS

The GX is the ultimate battery charging, support and diagnostic tool. Combine intelligent charging, maintenance, supply, reconditioning and testing into one simple process with these easy-to-use wall-mountable Advanced Battery Chargers.



SPARK PROTECTED

LEMANIAENERG









ITEM No.	03572	03573	03574
MODEL	ADVANCED BATTERY CHARGER GX5	ADVANCED BATTERY CHARGER GX10	ADVANCED BATTERY CHARGER GX15
VOLTAGE	12v	12v	12/24v
AMPS	5A	10A	15A
CHARGING STEPS	8	10	10
INPUT VOLTAGE V/Hz	110-240v @ 50-60Hz	230v @ 50-60Hz	230v @ 50-60Hz
CABLE LENGTH	180cm	200cm	200cm
Can-Bus COMPATIBLE	✓	✓	х
RECONDITIONED MODE	✓	✓	✓
ACCESSORIES	Quick connector, clamps, eyelets, 12V DC car adaptor	Quick connector, clamps, eyelets, 12V DC car adaptor	Quick connector, clamps, eyelets
IP RATING	65	65	20
USAGE			



SCAN HERE





SIP STARTMASTER P440 STARTER CHARGER

- 230v (13A) input supply
- 12v/24v charging voltages220A max. boost rate
- 180Ah max. battery capacity
- 33A max. charging current
- Ideal for workshops and garages
- · Clear and easy-to-read ammeter
- Short circuit / overload protections
- 2 different charge rate settings

 BOOST START - JUMP START YOUR CAR









Item No: 05533

SIP PROFESSIONAL STARTMASTERS

13A 230v

Wheel-mounted professional battery starter/chargers, suitable for professional-grade applications and tradespeople.

Tough, wheel-mounted steel case for added durability.
Supplied with heavy-duty charge leads and crocodile clips.

BOOST START - JUMP START YOUR CAR





MADE IN ITALY



ITEM No.	05534	05536	05537	05538	05539
MODEL	SIP STARTMASTER PW520	SIP STARTMASTER PW600	SIP STARTMASTER PW760	SIP STARTMASTER PWT1000	SIP STARTMASTER PWT1400
INPUT SUPPLY			230v 50Hz		
OUTPUT VOLTAGE (Charging & Engine Start)			12/24v		
FUNCTIONS		3 Charge Settings & Boost		6 Charge Set	tings & Boost
	ENGINE START				
OUTPUT CURRENT MAX.	260A	300A	380A	500A	700A
INPUT CURRENT	25A	27A	37A	49A	63A
RECOMMENDED PLUG	230v (13A) supplied	230v (32A)	not supplied	230v (63A) not supplied	
			CHARGING RANGE		
CHARGING RANGE	42A (12v) / 21A (24v)	45A (12v) / 22.5A (24v)	57A (12v) / 28.5A (24v)	68A (12v) / 34A (24v)	90A (12v) / 45A (24v)
BATTERY RANGE	20 - 350Ah		50 - 550Ah		
RECOMMENDED PLUG	230v (13A) supplied 230v (13A) not supplied				
CHARGE USAGE					

TO PLACE AN ORDER: (3) 01509 500500

ELECTRIC COLD WATER PRESSURE WASHERS







EXTRA-LARGE
WHEELS
FOR EASIER
MOVEMENT OVER
UNEVEN TERRAIN



Item No	08972	08974
MODEL	SIP CW2300	SIP CW2800
INPUT SUPPLY	230v (13A)	230v (13A)
PUMP TYPE	SIP Axial	Brass-Headed SIP Axial
MOTOR	2.3kW	2.8kW
TURBO PRESSURE	5700psi EWP* (Turbo Lance)	5100psi EWP* (Turbo Lance)
MAX. PRESSURE	2900psi (200bar)	2610psi (180bar)
WATER FLOW RATE	300ltr/hr	510ltr/hr
DETERGENT TANK	0.4ltr	1.8ltr



ELECTRIC COLD WATER PRESSURE WASHERS







EXTRA-LARGE WHEELS **FOR EASIER MOVEMENT OVER UNEVEN TERRAIN**

08909:

- · COMET Brass-headed Axial 3 piston plunger pump for durability
- Carry handle
- · Quick wall-coupling system
- Heavy-duty 20mtr reinforced hose
- Accessories and hanging rack





· Brass-headed triplex crankshaft pump for double the lifespan

 Heavy-duty 4-POLE slow-running motor for quieter operation and longer life

- · Industrial steel lance with adjustable nozzle
- · Stainless steel valves
- · Adjustable pressure regulator



Item No	08909	08978
MODEL	SIP TEMPEST PW540/155 WALL-MOUNTED & PORTABLE ELECTRIC PRESSURE WASHER	SIP CW4000 PRO PLUS
INPUT SUPPLY	230v (13A)	230v (13A)
PUMP TYPE	COMET brass-headed Axial plunger pump	SIP Crankshaft
MOTOR	2.4kW	2.8kW (4 POLE) 1450rpm
MAX. PRESSURE	2175psi (150bar)	2175psi (150bar) VARIABLE
WATER FLOW RATE	510ltr/hr	up to 540ltr/hr
DETERGENT	Clip-on foam / detergent bottle	1.8ltr Tank

SIP Professional Rotary Surface Cleaner

- · Ideal for patios, walls and floors
- Complete with support handleSupplied with M22 fitting

IDEAL FOR LIGHT

COMMERCIAL

USE



SIP Pressure Washer Detergent

- · Heavy-duty concentrated detergent specially formulated for cleaning and removal of traffic film, heavy greasing, and stubborn ingrained soiling



ELECTRIC COLD WATER PRESSURE WASHERS









08990

- Corrosion-resistant brass-headed in-line triplex crankshaft pump for double the lifespan
- Integrated 7.5ltr detergent tank

08990

08961:

- Heavy-duty 3kW slow-running 4-POLE motor for quieter operation and longer life
- Protective metal casing
- Corrosion-resistant brass-headed in-line triplex crankshaft pump for double the lifespan







IDEAL FOR COMMERCIAL USE



IDEAL FOR
FARMING
& HEAVY
COMMERCIAL
USE

Item No	08990	08961
MODEL	SIP TEMPEST P660/150	SIP TEMPEST HDP660/120-02
INPUT SUPPLY	230v (13A)	230v (16A)
PUMP TYPE	COMET brass-headed in-line Triplex crankshaft pump	COMET brass-headed in-line Triplex crankshaft pump
MOTOR	2.9kW (4hp), 4-POLE	3kW (4hp), 4-POLE
MAX. PRESSURE	2177psi (150bar)	1742psi (120bar)
WATER FLOW RATE	660ltr/hr	660ltr/hr
DETERGENT TANK	7.5ltr	-



ELECTRIC HOT WATER PRESSURE WASHERS







EXTRA-LARGE
WHEELS
FOR EASIER
MOVEMENT OVER
UNEVEN TERRAIN



Item No	08953	08954
MODEL	SIP TEMPEST PH480/150 HOT WATER	SIP TEMPEST PH540/150 HOT WATER
INPUT SUPPLY	230v (13A)	230v (13A)
PUMP TYPE	COMET brass-headed Axial plunger pump	COMET brass-headed Axial plunger pump
MOTOR	2.3kW (3.1hp), 2800rpm, 2-P0LE	2.7kW (3.6hp), 2800rpm, 2-POLE
MAX. PRESSURE	2175psi (150bar)	2175psi (150bar)
WATER FLOW RATE	480ltr/hr	540ltr/hr
MAX. WATER TEMPERATURE	90°C	90°C
DETERGENT BOTTLE/TANK	350ml Bottle	4.5ltr Tank
BOILER FUEL TANK CAPACITY	4ltr (diesel)	15ltr (diesel)
ADDITIONAL FEATURES	ADJUSTABLE LOW PRESSURE DETERGENT SUCTION HEAVY-DUTY METAL LANCE WITH ADJUSTABLE NOZZLE 8MTR HEAVY-DUTY HOSE WITH INTEGRATED HANGING HOOKS	ADJUSTABLE LOW PRESSURE DETERGENT SUCTION PRESSURE GAUGE HEAVY-DUTY METAL LANCE WITH ADJUSTABLE NOZZLE 8MTR HEAVY-DUTY HOSE WITH BUILT-IN RETRACTABLE HOSE REEL

ELECTRIC HOT WATER PRESSURE WASHERS



IDEAL FOR Commercial USE





EXTRA-LARGE WHEELS FOR EASIER MOVEMENT OVER **UNEVEN TERRAIN**



08941: BRASS-HEADED AXIAL PLUNGER PUMP



08956: BRASS-HEADED IN-LINE TRIPLEX CRANKSHAFT PUMP; DOUBLE THE LIFESPAN



EASY-TO-USE CONTROL PANEL



08956: HEAVY-DUTY 4-POLE SLOW-RUNNING MOTOR; FOR QUIETER OPERATION & LONGER LIFE



EASY INTERNAL ACCESS



DETERGENT TANK



HOSE STORAGE HANGER



08956: PISTOL GRIP WITH WATER PRESSURE REGULATOR AND SWIVEL CONNECTOR



RUBBER NOZZLE SHROUD LANCE PROTECTION



INTEGRATED **FRONT & REAR**

BUMPERS FOR PROTECTION & DURABILITY







Item No	08941	08956
MODEL	SIP TEMPEST PH600/140 A2 HOT WATER	SIP TEMPEST PH600/140 T4 HOT WATER
INPUT SUPPLY	230v (13A)	230v (13A)
PUMP TYPE	COMET brass-headed Axial plunger pump	COMET brass-headed in-line Triplex crankshaft pump
MOTOR	2.2kW (3hp), 2800rpm, 2-POLE	2.2kW (3hp), 1400rpm, 4-P0LE
MAX. PRESSURE	2030psi (140bar)	2030psi (140bar)
WATER FLOW RATE	600ltr/hr	600ltr/hr
MAX. WATER TEMPERATURE	110°C	110°C
DETERGENT TANK	3.5ltr	3.5ltr
BOILER FUEL TANK CAPACITY	15ltr (diesel)	15ltr (diesel)
ADDITIONAL FEATURES	ADJUSTABLE LOW PRESSURE DETERGENT SUCTION PRESSURE GAUGE HEAVY-DUTY METAL LANCE WITH ADJUSTABLE NOZZLE 10MTR HEAVY-DUTY HOSE	ADJUSTABLE LOW PRESSURE DETERGENT SUCTION PRESSURE GAUGE HEAVY-DUTY METAL LANCE WITH ADJUSTABLE NOZZLE 10MTR HEAVY-DUTY HOSE



ELECTRIC HOT STEAM PRESSURE WASHERS











DETERGENT TANK WITH FLOW ADJUSTMENT TAP



EASY-TO-USE **CONTROL PANEL**



HEAVY-DUTY 4-POLE SLOW-RUNNING MOTOR; FOR QUIETER OPERATION AND LONGER LIFE



RUBBER NOZZLE SHROUD **LANCE PROTECTION**



Item No	08962	08964					
MODEL	SIP TEMPEST PH660/120HDS HOT STEAM	SIP TEMPEST PH900/200HDS HOT STEAM					
INPUT SUPPLY	230v (13A)	400v 3-Phase					
PUMP TYPE	COMET brass-headed in-line Triplex crankshaft pump	COMET brass-headed in-line Triplex crankshaft pump					
MOTOR	2.2kW (3hp), 4-POLE	5.5kW (7.5hp), 4-POLE					
MAX. PRESSURE	1740psi (120bar) variable 13A 230v	2900psi (200bar) variable 32A 400v					
WATER FLOW RATE	660ltr/hr variable	900ltr/hr variable					
MAX. WATER TEMPERATURE	85 - 140°C	85 - 140°C					
DETERGENT TANK	3.5ltr	3.5ltr					
BOILER FUEL TANK CAPACITY	18ltr (diesel)	18ltr (diesel)					
	INTEGRAL WATER SOFTENER / DESCALING TANK	INTEGRAL WATER SOFTENER / DESCALING TANK					
	LOW PRESSURE DETERGENT SUCTION	LOW PRESSURE DETERGENT SUCTION					
ADDITIONAL FEATURES	PRESSURE GAUGE	PRESSURE GAUGE					
ABBITIONNET ENTONES	HEAVY-DUTY METAL LANCE WITH Adjustable nozzle	HEAVY-DUTY METAL LANCE WITH ADJUSTABLE NOZZLE					
	10MTR HEAVY-DUTY HOSE	10MTR HEAVY-DUTY HOSE					

SUCKS WATER FROM BARRELS, TANKS & CONTAINERS... NO MAINS WATER SUPPLY NEEDED!

PETROL-POWERED COLD WATER PRESSURE WASHERS

Robust in their design and versatile in their application, SIP's range of petrol-powered cold water pressure washers support thorough cleaning, including locations where a mains water feed isn't accessible.

Built to deliver consistent high pressure, the 2mtr suction head will suck water from alternative sources such as barrels, tanks and containers. The range includes solutions that are ideal for home and professional applications:



PROFESSIONAL USE





SIP AXIAL PUMP & INTEGRATED
HOSE STORAGE BRACKET

Item No	08983	08984	08985	08986
MODEL	SIP TEMPEST CW-P 145AX	SIP TEMPEST CW-P 160AX	SIP TEMPEST CW-P 215AX	SIP TEMPEST CW-P 225AX
PUMP TYPE	SIP Axial pump head	SIP Axial pump head	SIP Axial / Brass-headed	SIP Axial / Brass-headed
ENGINE	3.2hp EURO 5	6.5hp EURO 5	7hp EURO 5	7hp EURO 5
MAX. OUTPUT PRESSURE	2105psi (145bar)	2349psi (162bar)	3135psi (216bar) variable	3265psi (225bar) variable
WATER FLOW RATE	420ltr/hr	402ltr/hr	522ltr/hr variable	540ltr/hr variable
HOSE LENGTH	7.5mtr	7.5mtr	7.5mtr	7.5mtr
DETERGENT SUCTION	✓	✓	✓	Integrated tank - 1.5ltr
SUCKS WATER	2mtr suction head	2mtr suction head	2mtr suction head	2mtr suction head
USAGE				














5x INTERCHANGEABLE SPRAY PATTERN NOZZLES INCLUDED 08984, 08985 and 08986

SIP Advanced Engine Oil A high-quality 10W-40 lubricant suitable for the needs of smaller 4-stroke engines Iltr SIP Pressure Washer Detergent Heavy-duty concentrated detergent specially formulated for cleaning and removal of traffic film, heavy greasing, and stubborn ingrained soiling SIP III SIP PRESSURE WashER The suitable for the specially formulated for cleaning and removal of traffic film, heavy greasing, and stubborn ingrained soiling The suitable for the specially formulated for cleaning and removal of traffic film, heavy greasing, and stubborn ingrained soiling The suitable film No: 02385

SIP TEMPEST TP760/190 PETROL POWERED PRESSURE WASHER

- Powerful 6.5hp (4.8kW) EURO 5 petrol engine for performance
- 2760psi (190bar) max. pressure and 750ltr/hr flow rate
- Large pneumatic tyres for easy movement over uneven terrain
- Low oil protection helps to prevent engine damage
- 10mtr heavy-duty rubber hose and heavy-duty lance



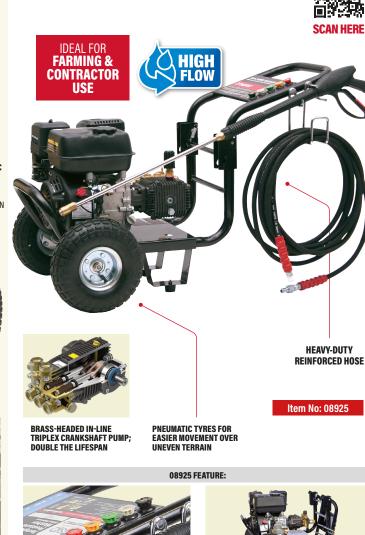



5x INTERCHANGEABLE

SPACE-SAVING FOLDING FRAME DESIGN

KOHLER® RANGE

- SIP brass-headed axial plunger pump
- Space-saving folding frames with extended handles
- · Heavy-duty reinforced hose
- Large pneumatic tyres for easier movement







IDEAL FOR FARMING & CONTRACTOR USE

POWERED by

HONDA™ GP & GX RANGE

- COMET axial plunger pump or SIP brass-headed crankshaft pump options
- Gearbox-driven pump (ITEM: 08947)
- Space-saving folding frames with extended handles
- · Heavy-duty reinforced hose
- Swivel connection lance (ITEMS: 08948, 08950)
- Large pneumatic tyres for easier movement



Item No	MODEL	PUMP TYPE	ENGINE	MAX. OUTPUT Pressure	WATER FLOW RATE	HOSE LENGTH	SUCKS WATER*	LANCE TYPE	
08442	SIP PP570/150WM	SIP Axial	7hp - 207CC (Kohler)	2175psi (150bar)	570ltr/hr	8mtr	-	Heavy-duty	
08446	SIP PP660/165WM	SIP Axial	7hp - 207CC (Kohler)	2393psi (165bar)	660ltr/hr	10mtr	Up to 2mtr*	Heavy-duty	
08642	SIP TPHGP570/150	COMET Axial	GP160 - 163CC (Honda)	2175psi (150bar)	570ltr/hr	8mtr	-	Heavy-duty	
08646	SIP TPHGP660/165	COMET Axial	GP200 - 196CC (Honda)	2393psi (165bar)	660ltr/hr	8mtr	Up to 2mtr*	Heavy-duty	
08643	SIP TPHGP760/190	SIP Crankshaft	GP200 - 196CC (Honda)	2760psi (190bar)	756ltr/hr	10mtr	-	Heavy-duty	
08946	SIP PP660/165	COMET Axial	GX160 - 163CC (Honda)	2393psi (165bar)	660ltr/hr	8mtr	Up to 2mtr*	Heavy-duty	
08943	SIP PP760/190	SIP Crankshaft	GX200 - 196CC (Honda)	2760psi (190bar)	756ltr/hr	10mtr	-	Heavy-duty	
08948	SIP PP960/210	COMET Crankshaft	GX340 - 340CC (Honda)	3045psi (210bar)	960ltr/hr	10mtr	Up to 2mtr*	Dual with end protector	
08950	SIP PP960/280	COMET Crankshaft	GX390 - 389CC (Honda)	4005psi (276bar)	960ltr/hr	10mtr	Up to 2mtr*	Dual with end protector	
08947	SIP PPG680/210	SIP Gearbox/Crankshaft	GX200 - 196CC (Honda)	3000psi (207bar)	676ltr/hr	9mtr	-	Heavy-duty + nozzles	

08947

50% REDUCED PUMP SPEED
Gearbox reduces the pump speed resulting in less wear
and tear and prolonged life





SIP HONDA™ PETROL ENGINE COLD WATER PRESSURE WASHER



SUCKS WATER FROM BARRELS, TANKS & CONTAINERS... NO MAINS WATER SUPPLY NEEDED!

DIESEL-POWERED COLD WATER PRESSURE WASHER





MAINS ELECTRIC FLOOR SCRUBBER / DRYERS

SIP MAINS-POWERED WALK-BEHIND FLOOR SCRUBBER / DRYERS

Designed for commercial and industrial environments, these mains supply solutions combine powerful brush and vacuum motors alongside a large scrubbing and squeegee area for outstanding cleaning performance.



Item No	MODEL	INPUT Supply	WORKING CAPACITY	BRUSH MOTOR POWER	VACUUM MOTOR POWER	SCRUBBING AREA / SQUEEGEE WIDTH	BRUSH DIAMETER	CLEANING/SOLUTION TANK	BRUSH Speed	WEIGHT
07980	SIP SD1260AC	230v (13A)	1260mtr³/hr	370w (0.49hp)	400w (0.53hp)	360mm / 440mm	360mm	11ltr / 13ltr	130rpm	61kg
07984	SIP SD1600AC	230v (13A)	1600mtr³/hr	400w (0.53hp)	700w (0.93hp)	450mm / 540mm	430mm	30ltr / 35ltr	150rpm	66kg



SIP Valeting Detergent - 5LTR

- A heavy-duty concentrated, low foam cleaner specially formulated for cleaning and removal of soiling from carpets and upholstery
- Lightly perfumed, economical and rapid action in use
- 5ltr container

Item No: 02402



SIP Scrubber Detergent - 10LTR

 A low foaming, multi-functional alkaline cleaner which is suitable for use in most types of cleaning equipment. Particularly recommended for use in scrubber dryer equipment in factory storage areas and industrial warehousing etc.

· 10ltr container







BATTERY-POWERED FLOOR SCRUBBER / DRYERS

SIP RECHARGEABLE WALK-BEHIND FLOOR SCRUBBER / DRYERS

For added flexibility and convenience, our battery-powered solutions offer the same powerful cleaning capacity without the restriction of a mains power cable. Supplied with rechargeable 12v DC 55Ah batteries to maintain intensive cleaning of stubborn dirt and grime.



Iten	ı No	MODEL	INPUT Supply	WORKING CAPACITY	BRUSH Motor Power	VACUUM MOTOR POWER	SCRUBBING AREA / SQUEEGEE WIDTH		CLEANING/SOLUTION TANK	BRUSH SPEED	WEIGHT
079	982	SIP SD1260BAT	12v DC (1x 55Ah)	1260mtr³/hr	250w (0.33hp)	180w (0.24hp)	360mm / 440mm	360mm	11ltr / 13ltr	130rpm	70kg
079	986	SIP SD1600BAT	12v DC (2x 55Ah)	1600mtr³/hr	400w (0.53hp)	400w (0.53hp)	450mm / 540mm	430mm	30ltr / 35ltr	150rpm	97kg







SIP 4-in-1 AIR CONDITIONER

Designed to effectively circulate cool and hot air to maintain a consistent temperature in a variety of indoor spaces including homes, offices and workshops.

Featuring four low noise operating modes, the 4-in-1 Air Conditioner can function as an air conditioner, dehumidifier, cooling fan and heater offering year-round application use.

- COOL MODE offers an adjustable target temperature down to 15°C
- HEATING MODE delivers an adjustable output of 8,000BTU/hr for max. temp of 31°C
- **DEHUMIDIFIER MODE** max. capacity of 1.2ltr/hr
- FAN MODE operates as a cooling fan without engaging the climate control functions
- Remote control allows the air conditioner to be operated at distance for added user convenience



Item No: 05647

1.5MTR EXPANDING AIR DUCT WITH FAN TAIL & WINDOW ADAPTOR





SIP 5-in-1 AIR CONDITIONER

This multi-purpose, mobile air conditioning unit features higher cooling and heating outputs for a variety of indoor spaces.

Featuring five low noise operating modes including cooling, heating, dehumidify, fan and automatic this versatile unit offer year-round application use.

- COOL MODE offers an adjustable target temperature down to 15°C
- HEAT MODE has an adjustable output temperature of up to 31°C
- DEHUMIDIFIER MODE removes moisture from the air with a max. capacity of 1.5ltr/hr
- FAN MODE operates without engaging the climate control functions
- **AUTO MODE** engages the cooling and heating functions as set by the user
- A front panel LED display indicates room temperature and is visible at night or in darkened rooms







EASY-TO-USE ELECTRONIC TOUCH PAD CONTROL PANEL & REMOTE CONTROL





1.5MTR EXPANDING AIR DUCT WITH FAN TAIL & WINDOW ADAPTOR

4x CASTOR WHEELS FOR EASY MOVEMENT



DEHUMIDIFIER

13A 230v



SIP 20 LITRE DEHUMIDIFIER

Our multi-purpose, portable unit is designed to effectively remove excessive air moisture from a variety of indoor spaces.

Featuring five operating modes, this dehumidifier functions to manage humidity levels across a variety of applications for year-round use.

- TARGET HUMIDITY MODE sets the percentage humidity level to reduce moisture in the air
- AIR CLEAN MODE ideal for removing travelling odours, the 2-speed fan can be adjusted for comfort
- AUTO MODE sets the air humidity to equal the level in the room or space
- DRY CLOTHES MODE for quick and effective drying applications to draw moisture from clothes and fabrics
- DEFROST MODE perfect for colder rooms and spaces, this setting can automatically engage to ensure a constant temperature

DEHUMIDIFYING RATE	20ltr/day (30°C 80%) / 10ltr/day (27°C 60%)
WATER TANK CAPACITY	6.5ltr
MAX. AIR FLOW	195mtr³/hr
GAS TYPE	Refrigerant R290 60g
LOW NOISE LEVEL	48dB(A)

Item No: 05648



You Tube



Supply air ventilation for a wide range of industries, workshops, below ground applications, loft spaces etc. Efficiently remove odours and stale air from work areas.

· Heavy-duty construction

- Effective intake suction for large air volume

05645





SIP VENTILATOR DUCTING

Supplied in 5mtr (10" & 12") & 10mtr (16") lengths, multiple sections can be joined together.

- · Concertina design for easy storage
- Heavy-duty PVC construction
- Suitable for SIP Ventilators



Item No	MODEL	INPUT SUPPLY	MOTOR POWER	FAN Ø	FAN SPEED	AIR FLOW (max)	NOISE LEVEL
05641	SIP 10" Ventilator	230v	300w	10" (250mm)	2800rpm	2700mtr³/hr	66dB(A)
05643	SIP 12" Ventilator	230v	500w	12" (300mm)	2800rpm	3900mtr³/hr	69dB(A)
05645	SIP 16" Ventilator	230v	1100w	16" (400mm)	2800rpm	7200mtr³/hr	79dB(A)



Item No	MODEL	INPUT Supply	MOTOR	FAN Diameter	NO. OF SPEEDS	SPEED RANGE	NOISE LEVEL
05632	SIP 16" HEAVY-DUTY FLOOR FAN	230v (13A)	75w	406mm (16")	3	955 / 1111 / 1302rpm	60dB(A)
05633	SIP 18" HEAVY-DUTY OSCILLATING PEDESTAL FAN	230v (13A)	100w	457mm (18")	3	900 / 1100 / 1300rpm	66dB(A)
05613	SIP 20" HEAVY-DUTY FLOOR FAN	230v (13A)	111w	508mm (20")	3	850 / 1100 / 1350rpm	75dB(A)
05635	SIP 20" HEAVY-DUTY ORBITAL FLOOR FAN	230v (13A)	120w	508mm (20")	3	900 / 1100 / 1300rpm	68dB(A)

ROTATES 360° ON HORIZONTAL AND VERTICAL AXIS FOR 720° ORBITAL AIR CIRCULATION COVERAGE

13A 230v

24" DIAMETER



Fitted onto wheel-mounted cradled steel frames, our powerful heavy-duty drum fans offer outstanding mobility between locations for use. Our range includes higher motor power options making them ideal for industrial applications.



Item No	MODEL	INPUT Supply	MOTOR	FAN Diameter	NO. OF Speeds	SPEED RANGE	NOISE LEVEL
05637	SIP 24" HEAVY-DUTY DRUM FAN	230v (13A)	120w	609mm (24")	3	900 / 1100 / 1300rpm	67dB(A)
05639	SIP 30" HEAVY-DUTY DRUM FAN	230v (13A)	123w	762mm (30")	2	850 / 950rpm	73dB(A)
05640	SIP 30" HEAVY-DUTY DRUM FAN - 110V	110v (16A)	120w	762mm (30")	2	850 / 950rpm	72dB(A)

PETROL-POWERED INVERTER GENERATORS

REASONS TO CHOOSE AN SIP INVERTER GENERATOR

Outstanding Functionality

Smart power solution, perfect for outdoor and leisure applications. Powers devices such as smartphones, laptops, portable lighting and small appliances.

· Clean, Safe and Stable Supply

4th generation digital inverter technology with pure sine wave output ensures a reliable supply. Thermally protected inverter module for added user safety.

Greater Fuel Economy

Integrated economy control switch for low loads. Helps to reduce fuel consumption for greater efficiency.

Quiet, Compact and Portable

Considerably quieter than traditional power generators. Compact design with great portability and mobility.





Item No	25400	25401	25402
MODEL	SIP ISG1101 DIGITAL INVERTER GENERATOR	SIP ISG2202 DIGITAL INVERTER GENERATOR	SIP ISG3303 DIGITAL INVERTER GENERATOR
OUTPUT SUPPLY	1x 230v AC and 1x 12v DC	2x 230v AC and 1x 12v DC	2x 230v AC and 1x 12v DC
MAXIMUM PEAK OUTPUT	1100w	2000w	3000w
CONTINUOUSLY RATED OUTPUT	1000w	1800w	2700w
USB OUTPUT	2x 5v 2A	2x 5v 2A	2x 5v 2A
ENGINE	60cc	78.5cc	149cc
FUEL TYPE	Unleaded Petrol	Unleaded Petrol	Unleaded Petrol
FUEL TANK CAPACITY	2.4ltr	4ltr	6ltr
MAX. RUN TIME	6hrs	8hrs	10hrs
NOISE LEVEL* (at 7 metres running at 1/4 load)	55dB	58dB	68dB
WEIGHT	13.75kg	20kg	28kg







Medusa 7952 Sip

PETROL-POWERED GENERATORS

SIP MEDUSA T952 COMPACT GENERATOR

- Up to 750w peak output, 650w continuously rated
- 60cc, 2hp, 2 stroke petrol engine EURO V
- 1x 230v (13A) AC socket and 1x 12v DC battery charging (up to 40Ah batteries) 4ltr fuel tank capacity

· Up to 6.5hrs running time Capable of powering small power tools, and work lights etc.

Item No: 03920

750W PEAK OUTPUT

UP TO 6.5HRS RUNTIME

VOLT METER

OUTPUT SOCKETS 1X 230V, 13A (AC) 1X 12V (DC)

SIP MEDUSA T2500W GENERATOR

- Up to 2200w peak output, 2000w continuously rated
- 212cc, 4 stroke, air-cooled, OHV petrol engine EURO V
- 2x 230v (13A) AC sockets and 1x 12v DC battery charging (up to 40Ah batteries)
- Automatic Voltage Regulator (AVR)
- · 15ltr fuel tank capacity
- Up to 10hrs running time
- · Low oil pressure alert system

2200W PEAK OUTPUT

UP TO 10HRS RUNTIME

LONG RANGE FUEL TANK

OUTPUT SOCKETS: 2X 230V, 13A (AC) 1X 12V (DC)

A.V.R.
(AUTO VOLTAGE REGULATION)
STABLE OUTPUT FOR SENSITIVE
EQUIPMENT



SIP MEDUSA T3000W GENERATOR

- Up to 3000w peak output, 2700w continuously rated
- · 212cc, 4 stroke, air-cooled, OHV petrol engine EURO V
- 1x 230v (16A) AC, 1x 110v (16A) AC sockets and 1x 12v DC battery charging (up to 40Ah batteries)
- Automatic Voltage Regulator (AVR)
- 15ltr fuel tank capacity
- · Up to 8hrs running time
- Low oil pressure alert system

3000W PEAK OUTPUT

UP TO 8HRS RUNTIME

LONG RANGE FUEL TANK

OUTPUT SOCKETS:

A.V.R.
(AUTO VOLTAGE REGULATION)
STABLE OUTPUT FOR SENSITIVE
FOILIPMENT

SIP MEDUSA T5500W GENERATOR

- Up to 5500w peak output, 5000w continuously rated
- 390cc (13hp), 4-stroke, air-cooled, OHV petrol engine EURO V
- 1x 230v (32A), 1x 110v (32A) AC sockets and 1x 12v DC battery charging (up to 8.3A)
- Includes AVR (Automatic Voltage Regulator)
- 25ltr fuel tank Up to 8hrs running time
- · Low oil pressure alert system
- Wheel-mounted, full frame design with integrated handles
- · Electric start (battery included)

ELECTRIC START

5500W PEAK OUTPUT

UP TO 8HRS RUNTIME

LONG RANGE FUEL TANK





INTEGRATED HANDLES



Item No: 25137







Item No: 25133







SIP GENERATOR PLUGS & ADAPTORS

SIP 13A/16A Socket Adaptor (230v)

- Suitable for 13A and 16A sockets
- Durable heavy-duty plastic casing
- Manufactured for long life



Item No: 04592

SIP 16A Socket Plug (230v)

- Suitable for 16A sockets
- · Durable heavy-duty plastic casing Manufactured for long life



Medusa Generator







DON'T FORGET...

Item No: 02419

SIP 1 Litre

Advanced Engine Oil Our range of KOHLER® engine petrol generators boast fantastic power output and 3 year manufacturer engine warranty. These generators are robust and reliable comprising of a heavy-duty maintenance-free alternators, cast iron cylinders and rugged frames.

- Quad Clean™ heavy-duty cyclonic air cleaner which forces large particles of contaminants out of the engine
- Engineered for enhanced durability Oversized mufflers, steel-forged crankshafts and oversized ignition systems
- Engine designed in the USA Electric start option available (see below for details)

IDEAL FOR **HEAVY-DUTY** COMMERCIAL









Item No	MODEL	OUTPUT SUPPLY SOCKETS	MAX. PEAK OUTPUT	CONT. RATED MAX. OUTPUT	ENGINE	FUEL TANK Size	RUN Time	FRAME TYPE
04340	SIP MEDUSA MGKP3.5FF	1x 110v (16A) 1x 230v (16A)	3.75kVA	3.5kVA	KOHLER® 7HP 207CC	4.1ltr	3hrs	Full Frame
04355	SIP MEDUSA MGKP7FF	1x 110v (16A) / 1x 230v (16A) 1x 110v (32A) / 1x 230v (32A)	7.5kVA	7kVA	KOHLER® 14HP 429CC	7.5ltr	2.8hrs	Full Frame
04357	SIP MEDUSA MGKP7FELR	1x 110v (16A) / 1x 230v (16A) 1x 110v (32A) / 1x 230v (32A)	7.5kVA	7kVA	KOHLER® 14HP 429CC	25ltr Long Range	8.5hrs	ELECTRIC START

Item No	KOHLER PETROL ENGINE MAINTENANCE SERVICE KITS
04480	SERVICE KIT for CH270 - 7HP
04482	SERVICE KIT for CH395 - 7HP and CH440 - 14HP




SIP GENERATORS - PETROL - PROFESSIONAL HONDA™



USE

Honda" GX Engines Reliability, excellent build quality, compact design, low oil alert Our popular Honda™ engines are powerful, reliable and are covered by a 3 year manufacturer engine warranty.

These generators are robust and reliable comprising of a heavy-duty maintenance-free alternators, cast iron cylinders and rugged frames.



Cast iron cylinder liner • Hot spark electronic ignition available (see below for details)













Item No	MODEL	OUTPUT SUPPLY SOCKETS	MAX. PEAK OUTPUT	CONT. RATED MAX. OUTPUT	ENGINE	FUEL TANK Size	RUN Time	FRAME TYPE
04462	SIP MEDUSA MGHP3.5FF	1x 110v (16A) 1x 230v (16A)	3.75kVA	3.5kVA	HONDA™ GX200 196CC	3.6ltr	2.6hrs	Full Frame
04468	SIP MEDUSA MGHP3.5FLR	1x 110v (16A) 1x 230v (16A)	3.75kVA	3.5kVA	HONDA™ GX200 196CC	15ltr Long Range	9hrs	Full Frame
04476	SIP MEDUSA MGHP6.0FLR	1x 110v (16A) / 1x 230v (16A) 1x 110v (32A) / 1x 230v (32A)	7.2kVA	6kVA	HONDA™ GX390 389CC	25ltr Long Range	8.5hrs	Full Frame
04478	SIP MEDUSA MGHP6.0FELR	1x 110v (16A) / 1x 230v (16A) 1x 110v (32A) / 1x 230v (32A)	7.2kVA	6kVA	HONDA™ GX390 389CC	25ltr Long Range	8.5hrs	ELECTRIC START

Item No	HONDA ENGINE MAINTENANCE SERVICE KITS
14552	AIR FILTER for HONDA™ GX160 / GX200 / GP200
14553	AIR FILTER for HONDA™ GX240 / GX270 / GP270
14564	AIR FILTER for HONDA™ GX340 / GX390 / GP390
14594	SPARK PLUG for HONDA™ GP and GX Engines



78









GENERATORS - SILENCED DIESEL

SIP MEDUSA T5500 SILENCED DIESEL GENERATOR

- · Powerful mobile supply unit for workshops, general construction and mobile hospitality
- · Also suitable for powering machinery, tools and lighting
- Powerful yet silenced, the generator is enclosed in a heavy-duty silenced generator cabinet with easy access service panel
- Equipped with rough terrain wheels for outdoor and on-site use
- · IP23M protection



POWERFUL 24A SINGLE-PHASE **OUTPUT**









ELECTRIC START

5.5KW PEAK OUTPUT

7.5HRS DAILY RUNTIME (FULL LOAD)

14.5LTR FUEL TANK

OUTPUT SOCKETS: 1X 110V, 30A (AC) 1X 230V, 24A (AC) 1X 12V, 6A (DC)

A.V.R. AUTO VOLTAGE REGULATION STABLE OUTPUT FOR SENSITIVE EQUIPMENT







IDEAL AS A **MOBILE POWER SUPPLY**

*Warranty valid for 2 years or 1000 working hours in accordance to daily runtime and intermittent usage. Service kit available. See maintenance schedule in manual for necessary checks.

SIP MEDUSA T15000 SILENCED DIESEL GENERATOR

- · Delivers powerful and improved 3-phase output
- · Double access panels on both sides provides greater service access
- · Digital display to monitor performance and outputs
- · Improved exhaust after-treatment to help reduce emissions
- · Fitted with castor wheels and lifting point for added flexibility
- · New crated packaging for greater transit protection

Contact us for site

survey to ensure correct application

IMPROVED THREE-PHASE **OUTPUT**

· IP23M protection



ELECTRIC START 32LTR FUEL TANK

12KW PEAK OUTPUT

6-7HRS DAILY RUNTIME

OUTPUT SOCKETS: 1X 230V, 15.5A (AC) 2X 400V, 15.5A (AC) 1X 12V, 6A (DC)

A.V.R. AUTO VOLTAGE REGULATION STABLE OUTPUT FOR SENSITIVE **EQUIPMENT**





IDEAL FOR **STANDBY APPLICATIONS**

*Warranty valid for 2 years or 1000 working hours in accordance to daily runtime and intermittent usage. Service kit available. See maintenance schedule in manual for necessary checks.

230v (32A)	2X (32A)
230V (32A)	400V (32A)





Item No	MODEL	OUTPUT SUPPLY SOCKETS	MAX. PEAK OUTPUT	CONT. RATED MAX. OUTPUT	ENGINE	FUEL TANK SIZE	RUN TIME DAILY (FULL LOAD)	SOUND POWER (LwA)
25153	SIP MEDUSA T5500 SILENCED DIESEL GENERATOR	1x 110v (30A) 1x 230v (24A) 1x 12v DC (6A)	5.5kW / 5.5kVA	5kW / 5kVA	0.5ltr EURO V Single Cylinder	14.5ltr	7.5hrs	97dB(A)
25155	SIP MEDUSA T15000 SILENCED DIESEL GENERATOR	1x 230v (15.5A) 2x 400v (15.5A) 1x 12v DC (6A)	12kW / 15kVA	11kW / 13.75kVA	1.0ltr EURO V Twin Cylinder	32ltr	6-7hrs	112dB(A)

Item No	SILENCED GENERATOR SERVICE KITS	DESCRIPTION
PW01-03143	SERVICE KIT for MEDUSA T5500	SIP In-line Fuel Filter / SIP Oil Filter / SIP Oval Air Cleaner Element
PW01-03184	SERVICE KIT for MEDUSA T15000	SIP Oil Filter / SIP inline Fuel Filter / SIP Air Filter Fine Element and SIP Air Filter Coarse Element

TO PLACE AN ORDER: (3) 01509 500500

FIREBALL DIESEL/PARAFFIN & KEROSENE SPACE HEATERS

Built with heavy-duty components to ensure long product life and easy-to-use smart design features

- Powerful heating capacity for effective coverage
- · Integrated thermostat delivers flexible temperature control
- Carry handle and wheel-mounted options available
- Ideal for heating workshops, garage spaces and warehouse areas







► SIP XD50F, XD75F

- Compact floor-standing design with carry handle for portability
- Powerful air pump for efficient fuel transfer
- Heavy-duty powder-coated finish for added durability

IDEAL FOR HEATING MEDIUM-SIZED WORKSHOP & GARAGE SPACES







EASY-TO-READ FUEL GAUGE (ITEM NO: 09590 - 09598)



► SIP XD75, XD100

- Rugged full-frame design for added protection
- Fitted with heavy-duty steel wheels and pneumatic tyres for outstanding mobility
- Powerful air pump for efficient fuel transfer
- Air pressure gauge indicates constant fuel supply
- Heavy-duty powder-coated finish for added durability

IDEAL FOR HEATING MEDIUM-SIZED WORKSHOP & GARAGE SPACES









09592 09593





Item No	MODEL	FUEL INPUT H		HEAT OUTPUT HEATING AREA		FUEL USAGE	FUEL TANK	WEIGHT
09590	SIP FIREBALL XD50F	Diesel/Paraffin/Kerosene	230v	50,000 BTU/hr (15kW)	350mtr3 (12,360ft3)	1.4ltr/hr	18ltr	16.6kg
09591	SIP FIREBALL XD75F	Diesel/Paraffin/Kerosene	230v	75,000 BTU/hr (22kW)	530mtr³ (18,717ft³)	1.9ltr/hr	18ltr	16.6kg
09592	SIP FIREBALL XD75	Diesel/Paraffin/Kerosene	230v	75,000 BTU/hr (22kW)	530mtr3 (18,717ft3)	1.9ltr/hr	26ltr	19.7kg
09593	SIP FIREBALL XD100	Diesel/Paraffin/Kerosene	230v	100,000 BTU/hr (30kW)	700mtr3 (24,720ft3)	2.8ltr/hr	26ltr	19.7kg



► SIP XD140, XD175, XD215

- Rugged full-frame design for added protection
- Fitted with heavy-duty steel wheels and pneumatic tyres for outstanding mobility
- Powerful air pump for efficient fuel transfer
- Air pressure gauge indicates constant fuel supply
- Remote sensor with 10mtr cable for accurate target temperature setting
- · Heavy-duty powder-coated finish for added durability

IDEAL FOR HEATING LARGE-SIZED WORKSHOPS, GARAGE SPACES & WAREHOUSE AREAS















► SIP XD275, XD350

- Rugged full-frame design for added protection
- Fitted with heavy-duty steel wheels and pneumatic tyres for outstanding mobility
- Powerful DANFOSS gear pump for efficient fuel transfer
- Remote sensor with 10mtr cable for accurate target temperature setting
- External fuel filter for easy maintenance and servicing
- Heavy-duty powder-coated finish for added durability

IDEAL FOR HEATING LARGE-SIZED WORKSHOPS, GARAGE SPACES & WAREHOUSE AREAS



HEAVY-DUTY DANFOSS GEAR PUMP (ITEM NO: 09597 & 09598)



EXTERNAL FUEL FILTER (ITEM NO: 09597 & 09598)









Item No	MODEL	FUEL	INPUT	HEAT OUTPUT	HEATING AREA	FUEL USAGE	FUEL TANK	WEIGHT
09594	SIP FIREBALL XD140	Diesel/Paraffin/Kerosene	230v	140,000 BTU/hr (41kW)	1060mtr3 (37,434ft3)	3.8ltr/hr	65ltr	28.7kg
09595	SIP FIREBALL XD175	Diesel/Paraffin/Kerosene	230v	175,000 BTU/hr (51kW)	1230mtr3 (43,437ft3)	4.8ltr/hr	65ltr	28.7kg
09596	SIP FIREBALL XD215	Diesel/Paraffin/Kerosene	230v	215,000 BTU/hr (63kW)	1500mtr3 (52,972ft3)	5.7ltr/hr	65ltr	28.7kg
09597	SIP FIREBALL XD275 Gear Pump	Diesel/Paraffin/Kerosene	230v	275,000 BTU/hr (80kW)	1930mtr3 (68,157ft3)	7.5ltr/hr	80ltr	38.8kg
09598	SIP FIREBALL XD350 Gear Pump	Diesel/Paraffin/Kerosene	230v	350,000 BTU/hr (105kW)	2460mtr3 (86,874ft3)	9.5ltr/hr	80ltr	38.8kg

FIREBALL PREMIUM DIESEL/PARAFFIN & KEROSENE SPACE HEATERS

Built for durability and longevity, our premium stainless steel space heaters offer exceptional performance.

- · Powerful heating capacity for effective coverage
- Ideal for heating workshops, garage spaces and warehouse areas













► SIP P660S

- Heavy-duty corrosion-resistant stainless steel casing for longer life
- Heavy-duty gear pump proven technology low maintenance
- External fuel filter for easy cleaning and maintenance
- Shockproof polythene fuel tank anti-corrosive for extended lifespan
- Electronic ignition with flame photosensor for easy starting
- Wheel & pull handle kit available (see 09001 below)

IDEAL FOR HEATING MEDIUM-SIZED WORKSHOP & GARAGE SPACES



HEAVY-DUTY DANFOSS GEAR PUMP



REAR CONTROL PANEL WITH OPTIONAL THERMOSTAT (SEE 09034 BELOW)



You Tube

SCAN HERE

► SIP P1280S, P1645S

- Heavy-duty corrosion-resistant stainless steel casing for longer life
- Heavy-duty gear pump proven technology low maintenance
- External fuel filter for easy cleaning and maintenance
- Shockproof polythene fuel tank anti-corrosive for extended lifespan
- Electronic ignition with flame photosensor for easy starting
- Wheel-mounted with pull handle for greater mobility

09043 **IDEAL FOR HEATING LARGE-SIZED WORKSHOP &**



GARAGE SPACES





Item No	MODEL	FUEL	INPUT	HEAT OUTPUT	HEATING AREA	FUEL USAGE	FUEL TANK	WEIGHT
09041	SIP FIREBALL P660S	Diesel/Paraffin/Kerosene	230v (13A)	73,110 BTU/hr (21.4kW)	461mtr3 (16,400ft3)	2.1ltr/hr	17ltr	20kg
09043	SIP FIREBALL P1280S	Diesel/Paraffin/Kerosene	230v (13A)	131,512 BTU/hr (38.5kW)	900mtr3 (31,143ft3)	3.81ltr/hr	42ltr	30kg
09047	SIP FIREBALL P1645S	Diesel/Paraffin/Kerosene	230v (13A)	164,850 BTU/hr (49kW)	1154mtr3 (41,214ft3)	4.81ltr/hr	42ltr	39kg



SIP Fireball Thermostat For use with 09043, 09047, 09156, 09296 SIP Diesel/Paraffin Heaters 10MTR CABLE



FIREBALL ELECTRIC PROPANE SPACE HEATERS

Powerful and portable, these versatile heaters safely warm work areas quickly and effectively.





- Lightweight with carry handle highly portable
- Integrated front grille for operator safety
- Heavy-duty powder-coated finish for added durability
- Igniter for rapid start-up
- · Regulator & hose included

IDEAL FOR HEATING MEDIUM-SIZED WORKSHOP & GARAGE SPACES





Item No	MODEL	FUEL	INPUT	HEAT OUTPUT	HEATING AREA	FUEL USAGE	WEIGHT
09287	SIP FIREBALL 342	Propane	230v (13A)	34,121 BTU/hr (10kW)	230mtr³ (8,122ft³)	0.73kg/hr	3.8kg
09288	SIP FIREBALL 512	Propane	230v (13A)	51,182 BTU/hr (15kW)	345mtr³ (12,181ft³)	1.09kg/hr	3.8kg
09289	SIP FIREBALL 1030	Propane	230v (13A)	102,364 BTU/hr (30kW)	690mtr3 (24,367ft3)	2.18kg/hr	5.8kg
09291	SIP FIREBALL 1706	Propane	230v (13A)	170,607 BTU/hr (50kW)	1145mtr3 (40,435ft3)	3.63kg/hr	7kg



Item No	MODEL	FUEL	BATTERY	HEAT OUTPUT	HEATING AREA	FUEL USAGE	RUNTIME*
09269	SIP FIREBALL 515 Cordless	Propane	18v DC 5.2Ah	51,182 BTU/hr (15kW)	345mtr³ (12,181ft³)	1.09kg/hr	8hrs
09279	SIP FIREBALL 1050 Cordless	Propane	18v DC 5.2Ah	102,387 BTU/hr (30kW)	500mtr ³ (17,401ft ³)	2.18kg/hr	6hrs

SPARE BATTERY

SIP 18v 5.2Ah Lithium Battery Pack

For use with 09269 and 09279 Fireball Cordless Propane Heaters



Item No: PW25-00013

FIREBALL DUAL VOLTAGE 110v/230v ELECTRIC PROPANE SPACE HEATERS

Powerful, portable and great for on-site use, these versatile heaters warm work areas quickly and effectively. All feature variable heating output control and are supplied with an approved gas regulator and hose.

- Powerful heating capacity for effective coverage and control
- · Push-button piezo ignition system ensures safe, reliable and easy start-up
- Adjustable heating output control
- · Fan-powered to maintain even heat distribution
- Compact floor-standing design with carry handle for outstanding portability
- All steel construction







ADJUSTABLE HEATING OUTPUT CONTROL

Item No	MODEL	FUEL	INPUT	HEAT OUTPUT	HEATING AREA	FUEL USAGE	WEIGHT
09231	SIP FIREBALL DV85	Propane	230v / 110v	55,000 - 85,500 BTU/hr (16.1 - 24.9kW)	575mtr3 (20,300ft3)	1.16 - 1.79kg/hr	6.65kg
09232	SIP FIREBALL DV125	Propane	230v / 110v	75,000 - 125,000 BTU/hr (22 - 36.6kW)	910mtr3 (32,500ft3)	1.59 - 2.63kg/hr	6.7kg
09233	SIP FIREBALL DV170	Propane	230v / 110v	120,000 - 170,000 BTU/hr (35 - 50kW)	1145mtr3 (40,892ft3)	3.0 - 3.86kg/hr	8.6kg

FIREBALL RADIANT PROPANE HEATERS

Compact and portable infrared heating solutions designed to heat work-spaces quickly and effectively.

No mains supply needed.

- · Push-button piezo ignition system ensures safe, reliable and easy start-up
- Adjustable gas flow control for optimising heat output (09314 and 09316)
- Tip over and flame out cut off safety device for added protection
- Easy to move around the work area and store between use
- Regulator and hose included

IDEAL FOR HEATING WORKSHOPS & GARAGE SPACES



Item No M	MODEL	FUEL	HEAT OUTPUT	FUEL USAGE	HOSE LENGTH	WHEEL KIT	LOW NOISE
09314 S	SIP FIREBALL RP15 RADIANT	Propane	15,000 BTU/hr (4.7kW)	0.34kg/hr	1.5mtr	-	✓
09315 S	SIP FIREBALL RP35 RADIANT	Propane	35,000 BTU/hr (10.25kW)	0.74kg/hr	2mtr	✓	✓
09316 S	SIP FIREBALL RP125 RADIANT	Propane	125,000 BTU/hr (36.6kW)	2.60kg/hr	3mtr	✓	✓



FIREBALL PREMIUM DUAL VOLTAGE 110v/230v **ELECTRIC PROPANE SPACE HEATERS**

Premium dual voltage stainless steel space heaters offer durability, longevity and versatile use.

► SIP 1602DV, 2261DV, 2901DV & 3711DV

- Dual voltage for greater versatility
- Variable output controlled by regulator for efficient gas burning
- Free-standing legs for stability
- Integrated front safety grille operator safety
- Igniter for rapid start-up
- Carry handle easy portability
- Wheel & pull handle kits available for greater mobility

IDEAL FOR ON-SITE USE. PERFECT FOR WORKSHOPS **AND GARAGE SPACES**





VARIABLE OUTPUT CONTROLLED BY REGULATOR FOR EFFICIENT GAS BURNING














Item No	MODEL	FUEL	INPUT	HEAT OUTPUT	HEATING AREA	FUEL USAGE	WEIGHT
09275	SIP FIREBALL 1602DV	Propane	230v / 110v	74,202 - 160,000 BTU/hr (21.7 - 46.9kW)	1074mtr3 (37,927ft3)	1.45 - 2.98kg/hr	14.7kg
09276	SIP FIREBALL 2261DV	Propane	230v / 110v	106,995 - 226,000 BTU/hr (31.4 - 66.2kW)	1517mtr3 (53,572ft3)	2.1 - 4.27kg/hr	17.2kg
09277	SIP FIREBALL 2901DV	Propane	230v / 110v	130,277 - 290,000 BTU/hr (38.2 - 85kW)	1946mtr3 (68,722ft3)	2.5 - 5.28kg/hr	19.2kg
09278	SIP FIREBALL 3711DV	Propane	230v / 110v	158,767 - 371,000 BTU/hr (46.5 - 108.7kW)	2490mtr3 (87,934ft3)	3.09 - 6.89kg/hr	28.5kg
09285	SIP FIREBALL WHEEL KIT	•	For use with 0927	75 and 09276			
09286	SIP FIREBALL WHEEL KIT	•	For use with 0927	77			

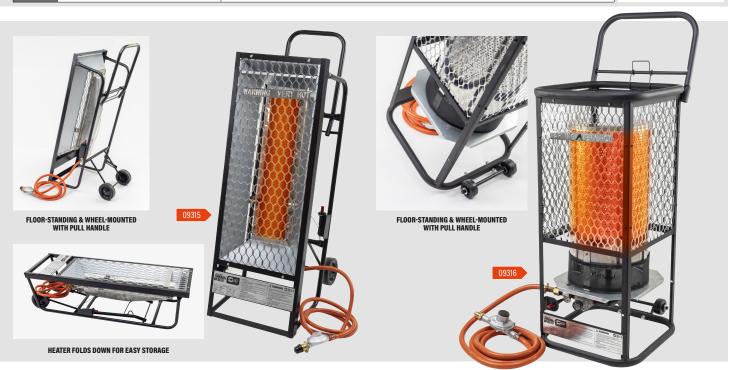

FIREBALL PORTABLE INFRARED DIESEL, PARAFFIN & KEROSENE HEATERS

Infrared heaters are designed to heat objects, people and surfaces directly, rather than only warming the air in a workspace. This means they distribute heat more evenly and efficiently.

► SIP ID51 INFRARED

- Powerful 51,100BTU/hr infrared heating capacity for even heat distribution
- Integrated thermostat for regulating heat output
- Stainless steel deflector channels heat to protect the floor
- Fuel filter protects against burning particles to maximise performance
- 11ltr fuel tank with fuel gauge to optimise usage
- · Low noise operation
- · Stand-mounted for added stability with strong grip carry handle

IDEAL FOR MEDIUM-SIZED WORKSHOPS AND GARAGE SPACES







INTEGRATED THERMOSTAT FOR FLEXIBLE TEMPERATURE CONTROL



11LTR FUEL TANK WITH EASY-TO-READ FUEL GAUGE



FUEL CAP FILTER TRAPS PARTICLES TO ENSURE



► SIP ID78 INFRARED

- Powerful 78,479BTU/hr infrared heating capacity for even heat distribution
- Integrated thermostat for regulating heat output
- Stainless steel deflector channels heat to protect the floor
- Fuel filter protects against burning particles to maximise performance
- 15ltr fuel tank with fuel gauge to optimise usage
- · Low noise operation
- · Stand-mounted for added stability with strong grip carry handle

IDEAL FOR MEDIUM-SIZED WORKSHOPS AND GARAGE SPACES







INTEGRATED THERMOSTAT FOR FLEXIBLE TEMPERATURE CONTROL



15LTR FUEL TANK WITH EASY-TO-READ FUEL GAUGE



FUEL CAP FILTER TRAPS PARTICLES TO ENSURE MAXIMUM PERFORMANCE



Item No	MODEL	FUEL	INPUT	HEAT OUTPUT	FUEL USAGE	FUEL TANK
09305	SIP FIREBALL ID51 15kW INFRARED	Diesel/Paraffin/Kerosene	230v (13A)	51,182 BTU/hr (15kW)	1.5ltr/hr	11ltr
09307	SIP FIREBALL ID78 23kW INFRARED	Diesel/Paraffin/Kerosene	230v (13A)	78,000 BTU/hr (23kW)	2.19ltr/hr	15ltr



FIREBALL WHEEL-MOUNTED INFRARED DIESEL, PARAFFIN & KEROSENE HEATERS

Built with heavy-duty components to ensure long product life, our wheel mounted infrared diesel heaters are designed for heating larger well-ventilated spaces.

► SIP 1822 INFRARED

- 5 safety functions: tipover sensor, overheat sensor, flame detector, air pressure sensor, motor thermal protection
- · Adjustable heater cone up and down
- · Temperature control thermostat with digital display
- · Easy to read fuel gauge
- · Rugged steel construction
- · Wheel-mounted for easy movement

IDEAL FOR HEATING MEDIUM TO LARGE-SIZED WORKSHOP & GARAGE SPACES







► SIP 1830, 1850 INFRARED

- Geared fuel pumps low maintenance
- Unique Tri-Concentric cone combustion chamber efficient heat output, improved heater casing cooling, superb durability
- Electronic flame control with photosensor
- Stainless steel combustion chamber with post heat cooling timer
- Shockproof polythene fuel tank anti-corrosive extended lifespan
- Adjustable heater head (up & down) for optimum coverage
- Optional 10mtr room thermostat available (Item No: 09034)

IDEAL FOR HEATING LARGER SIZED WORKSHOP & GARAGE SPACES















EXTENDABLE DEFLECTOR CHANNELS HEAT &PROTECTS THE FLOOR



OPTIONAL THERMOSTAT (FOR 09296, 09156) SEE ITEM: 09034 - PAGE 80



Item No	MODEL	FUEL INPUT		HEAT OUTPUT	FUEL USAGE	FUEL TANK
09312	SIP FIREBALL 1822 INFRARED	Diesel/Paraffin/Kerosene	230v (13A)	120,000 BTU/hr (35.2kW)	3.44ltr/hr	40ltr
09296	SIP FIREBALL 1830 INFRARED	Diesel/Paraffin/Kerosene	230v (13A)	88,294 BTU/hr (25.8kW)	2.04ltr/hr	43ltr
09156	SIP FIREBALL 1850 INFRARED	Diesel/Paraffin/Kerosene	230v (13A)	155,737 BTU/hr (45kW)	3.6ltr/hr	65ltr

FIREBALL INDUSTRIAL INFRARED DIESEL HEATERS

Infrared heaters designed to heat objects, people and surfaces directly rather than warming only the air in a workspace. This means they distribute heat more evenly and efficiently. Versatile and streamline diesel heater - no air movement, low dust, low noise with even heat distribution.



Item No	MODEL	FUEL	INPUT	HEAT OUTPUT	HEATING AREA	FUEL TANK
09236A	SIP FIREBALL IDX44 INDUSTRIAL INFRARED WITH 3PC FLUE KIT	Diesel/Paraffin	230v (13A)	44,357 BTU/hr (13kW)	303mtr3 (10,721ft3)	50ltr
09241A	SIP FIREBALL IDX54 INDUSTRIAL INFRARED WITH 3PC FLUE KIT	Diesel/Paraffin	230v (13A)	54,594 BTU/hr (16kW)	373mtr3 (13,321ft3)	50ltr
09256	SIP FIREBALL IDX 3PC FLUE KIT	For use with (09236A & 09	241A		



INFRARED ELECTRIC HEATERS

Powerful halogen infrared or carbon fibre lamp encased in a strong and lightweight aluminium housing for durability



Uses <u>30% to 40%</u> less electricity than other traditional heaters

SUITABLE FOR INDOOR OR OUTDOOR USE

► SIP 09585, 09586

- Strong aluminium housing
- · IP55 protected against large water splashes and dust
- Gold halogen bulbs (HeLeN)
- · For indoor & outdoor use











- · 0.6mtr stainless steel hanging chain
- Strong aluminium housing







- Carbon fibre element up to 10,000hrs of use
- Safety tilt switch
- Strong aluminium housing





Item No	MODEL	INPUT	HEAT SETTINGS	HEATING OUTPUT	FEATURES	WEIGHT
09585	SIP Halogen Universal Heater	230v (13A)	1	2kW (6,820 BTU/hr)	Wall / Stand Mount	1.7kg
09586	SIP Halogen Universal Heater with Remote Control	230v (13A)	2	1kW (3,412 BTU/hr) 2kW (6,820 BTU/hr)	Wall / Stand Mount	1.7kg
09589	SIP Halogen Universal Heater Stand	For use	with Heaters 09585	and 09586, adjust height	position from 1.3mtr to 1.8n	ntr
09585P	SIP Halogen Universal Heater + Stand					
09586P	SIP Halogen Universal Heater with remote + Stand					
09587	SIP Hanging Universal Heater with Remote Control	230v (13A)	1	1.5kW (5,118BTU/hr)	Hanging	2.26kg
09588	SIP Free-Standing Universal Heater	230v (13A)	1	2kW (6,820BTU/hr)	Floor Standing Carbon Fibre Element	4kg

FIREBALL ELECTRIC FAN HEATERS - 230v

Featuring a PTC ceramic element for exceptional heat transfer, these compact, portable and easy to power heaters are designed to warm spaces quickly and effectively.


► SIP TURBOFAN 2000

- PTC element (positive thermal coefficient) for safer temperature control
- Compact floor-standing design with integrated carry handle for portability
- Thermostatically-controlled auto shut-off energy saving
- · Heavy-duty powder-coated finish for added durability
- Integrated legs for stability

IDEAL FOR HEATING SMALL-SIZED WORKSHOPS, GARAGE SPACES & OFFICES











FIREBALL OSIP

► SIP TURBOFAN 3001

- PTC element (positive thermal coefficient) for safer temperature control
- Compact floor-standing design with integrated carry handle for portability
- Thermostatically-controlled auto shut-off energy saving
- Heavy-duty powder-coated finish for added durability
- Integrated legs for stability

IDEAL FOR HEATING SMALL-SIZED WORKSHOPS, GARAGE SPACES & OFFICES



INTEGRATED THERMOSTAT & OUTPUT CONTROL DIAL



PTC ELEMENT FOR IMMEDIATE & CONSISTENT HEAT LEVELS



You Tube

SCAN HERE





Item No	MODEL	INPUT	HEAT OUTPUT	HEAT SETTINGS	TILT ADJUST	WEIGHT
09128	SIP FIREBALL Turbofan 2000	230v (13A)	6,820 BTU/hr (2kW)	Fan / 1000w / 2000w	✓	1.7kg
09215	SIP FIREBALL Turbofan 3001	230v (13A)	9,556 BTU/hr (2.8kW)	Fan / 1400w / 2800w	✓	3.4kg



FIREBALL ELECTRIC FAN HEATERS - 400v

Designed to achieve powerful heating outputs, these 3-phase supply electric heaters offer exceptional performance from a PTC ceramic or high power coil element.

► SIP TURBOFAN 5000

- PTC element (positive thermal coefficient) for safer temperature control
- Compact floor-standing design with integrated carry handle for portability
- Thermostatically-controlled auto shut-off energy saving
- Heavy-duty powder-coated finish for added durability
- Integrated legs for stability

IDEAL FOR HEATING MEDIUM-SIZED WORKSHOPS & GARAGE SPACES











HIGH POWER COIL TO MEET
DEMANDING HEAT REQUIREMENTS



INTEGRATED THERMOSTAT AND OUTPUT CONTROL DIALS



- · Robust coiled heating element
- Compact-floor standing design with integrated legs and carry handle
- · Thermostatically-controlled auto shut-off energy saving
- Heavy-duty powder-coated finish for added durability

IDEAL FOR HEATING MEDIUM TO LARGE-SIZED WORKSHOPS & GARAGE SPACES







Item No	MODEL	INPUT	HEAT OUTPUT	HEAT SETTINGS	TILT ADJUST	WEIGHT
09220	SIP FIREBALL Turbofan 5000	400v 3-phase (16A)	17,064 BTU/hr (5kW)	Fan / 3300w / 5000w	✓	4.3kg
09299	SIP FIREBALL Turbofan 9001	400v 3-phase (16A)	30,706 BTU/hr (9kW)	Fan / 4500w / 9000w	✓	11.4kg
09298	SIP FIREBALL Turbofan 15000	400v 3-phase (32A)	51,193 BTU/hr (15kW)	Fan / 5000w / 10,000w / 15,000w	х	14.5kg

NEW RANGE

LANDSCAPING



08232

02419

Advanced Chainsaw Oil - 1ltr

Advanced Engine Oil (10W 40) - 1ltr



NEW RANGE

LANDSCAPING

PROFESSIONAL 31CC 4-STROKE PETROL 4-IN-1 MULTI TOOL

Combining power and versatility with four highly functional and interchangeable tools, the SIP 31cc 4 Stroke Petrol 4-in-1 Multi Tool is a professional-grade landscaping tool.

- · Reliable and easy to maintain multi tool that simplifies landscaping tasks of all sizes
- Stable and agile design suitable for long periods of use
- · Ideal for contractors, tradespeople and groundskeepers
- Built to withstand heavy everyday usage in gardens, fields and properties



- Easy to start
 Eliminates fuel & oil mixing
 Cleaner emissions
 Greater fuel efficiency

- Reduced handling vibration
- Lower noise



EASY TO USE CONTROLS INCLUDE ON/OFF SWITCH, SAFETY LATCH & THROTTLE TRIGGER



CAST ALUMINIUM TRANSMISSION HOUSING HELPS ABSORB ENGINE NOISE & WITHSTAND STRESS



DOUBLE OVER-SHOULDER STRAP Harness with hip protection & Heavy-Duty Tool Clip



CUTTER

uuu HEDGE **TRIMMER**

Cutter 0:

Length: 365mm Blade Gap: 20mm




PRUNING

TRIMMER Trimmer 0: 430mm Cord 0: 24mm

SAW Saw Length: 255mm









CLEARING OF OVERGROWN BRUSH, WEEDS & THICK GRASS



GRASSY AREAS & LAWNS



HEDGE CUTTER WITH 12 LOCKING POSITIONS Or trimming and shaping Hedges, Bushes RUBS. SUPPLIED WITH 840 Attachment extension



PRUNING SAW IDEAL FOR TRIMMING THINNER TREE BRANCHES & GARDEN VINES. SUPPLIED WITH 840MM ATTACHMENT EXTENSION




PUSH-CLICK & TWIST QUICK-RELEASE POSITIVE DRIVE SPLINE INTERLOCK CONNECTION



RAPID TOOL ATTACHMENT CHANGEOVERS FOR



ELECTRIC LOG SPLITTERS

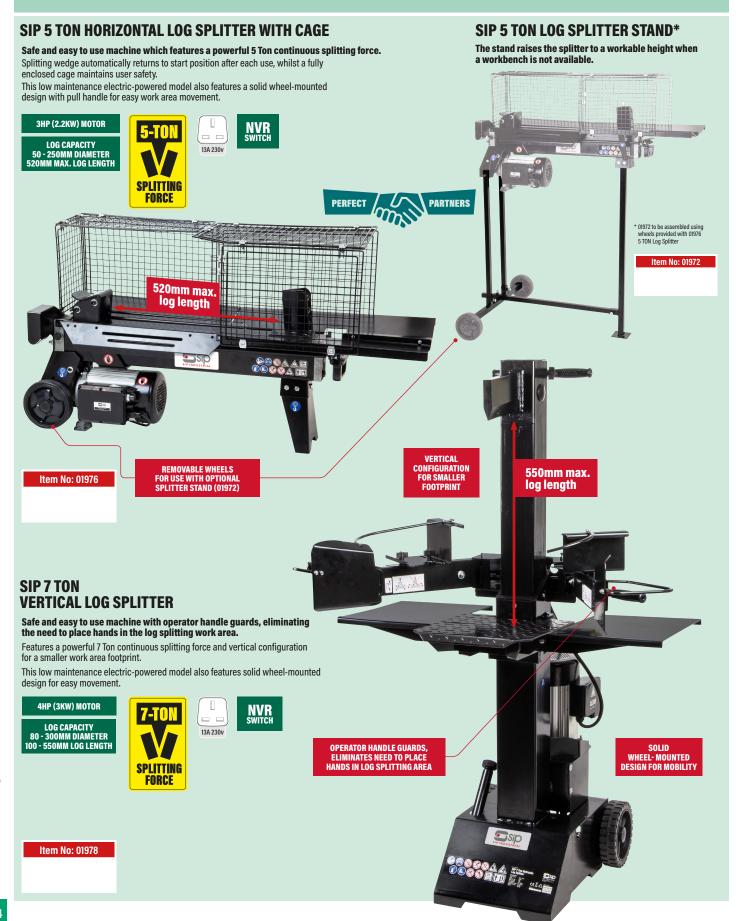



LANDSCAPING





TIGREN 16" LOG SAW

Item No: 08209

A powerful saw designed to cut and sever logs quickly and effortlessly via 2-handed cutting with anti-kickback device for the highest operator safety, plus durability through a high-quality powder-coated steel frame. Perfect for the home user and DIY usage.



TIGREN 115LTR ELECTRIC CEMENT MIXER

Home and DIY building projects are light work for the TIGREN electric cement mixer thanks to a wide access and user-friendly adjustable angle and tilt settings.

- 230v supply
- 550W @ S6 30% motor power
- 115ltr steel drum with a 85ltr mixing capacity
- Large wide drum access with adjustable angle setting and tilt functions for ease-of-operation, emptying and storage
 Supplied with wheels and handles for





IMPROVED RANGE

METALWORK - PILLAR DRILLS

CH-STANDING

Ideal for preparing and finishing a variety of workpiece materials including ferrous and non-ferrous metals, soft and hardwoods and high-density plastics.

- Sturdy cast iron bases for added stability
- Heavy-duty induction motors for excellent performance for demanding environments
- Safety chuck guards included
- One piece cast steel soft-grip handle (Not items: 01710 and 01711)






ONE PIECE CAST STEEL SOFT-GRIP HANDLES (NOT ITEM: 01710, 01711) **FULLY ADJUSTABLE TABLE:** VERSATILE DRILL
POSITIONING WITH
TABLE TILT SCALE



NVR SWITCH: ADDITIONAL NVR SWITCH: ADDITIONA
SAFETY, PREVENTS
ACCIDENTAL START-UP
AFTER POWER
INTERRUPTIONS
(NOT ITEM: 01710)



















01713							
MAX.	DRILLING CAPACITY (MILD STEEL)						
	(MILD STELL)						

Item No	01710	01711	01712	01713	01714	01715	01716	01717	01718
MODEL	SIP B13 5-SPEED 350w	SIP B16 12-SPEED 450w	SIP B16 16-SPEED 550w	SIP B20 16-SPEED 750w	SIP F16 16-SPEED 550w	SIP F20 16-SPEED 750w	SIP F20 12-SPEED 750w	SIP F20 12-SPEED 1100w	SIP F20 12-SPEED 1100w 400v
ТҮРЕ	Bench	Bench	Bench	Bench	Floor	Floor	Floor	Floor	Floor
INPUT SUPPLY	230v (13A)	230v (13A)	230v (13A)	230v (13A)	230v (13A)	230v (13A)	230v (13A)	230v (13A)	400v (3 phase)
MOTOR	350w	450w	550w	750w	550w	750w	750w	1100w	1100w
SPEED RANGE	580 - 2650rpm	300 - 2550rpm	220 - 2800rpm	200 - 2800rpm	220 - 2800rpm	200 - 2800rpm	320 - 2380rpm	150 - 2500rpm	150 - 2500rpm
SPEED SETTINGS	5	12	16	16	16	16	12	12	12
DRILL BIT SIZE Ø	1.5 - 13mm	3 - 16mm	3 - 16mm	5 - 20mm	3 - 16mm	5 - 20mm	5 - 20mm	5 - 20mm	5 - 20mm
MAX. DRILLING CAPACITY	13mm	16mm	16mm	20mm	16mm	20mm	25mm	32mm	32mm
SPINDLE TAPER	B16	B16	MT2	MT2	MT2	MT2	MT3	MT4	MT4
SWING	210mm	260mm	325mm	360mm	316mm	360mm	350mm	506mm	506mm
MAX. SPINDLE STROKE	50mm	60mm	80mm	80mm	80mm	80mm	80mm	120mm	120mm
OVERALL HEIGHT	580mm	840mm	975mm	1000mm	1570mm	1575mm	1575mm	1720mm	1720mm



FLOOR-STANDING RANGE







Item No	DESCRIPTION
66609	SIP 40mm Chuck Guard (for 01710, 01711)
07662	SIP 55mm Chuck Guard (for 01712, 01713, 01714, 01715)
07664	SIP 65mm Chuck Guard (for 01716)
68328	SIP 75mm Chuck Guard (for 01717, 01718)

0
5
0
0
2
9
0
5
0
_
\odot
∴
盲
=
=
=
0
\geq
\overline{A}
뽔
\mathbf{c}
A
=
а.
0
\vdash

MODEL	SIP INDUSTRIAL F25-GB 8-SPEED 900w 400v DRILL	SIP INDUSTRIAL F32-ID Vari-speed 2.2kw 400v drill	SIP INDUSTRIAL F40-IDA VARI-SPEED 2.2kW 400v DRILL
ТҮРЕ	Floor	Floor	Floor
INPUT SUPPLY	400v (3 phase) 50Hz	400v (3 phase) 50Hz	400v (3 phase) 50Hz
MOTOR	0.65kW / 0.9kW	2.2kW	2.2kW
SPEED RANGE	105 - 2900rpm	65 - 2000rpm Variable	65 - 2000rpm Variable
SPEED SETTINGS	8	Variable	Variable
DRILL BIT SIZE Ø	1.5 - 13mm	3 - 16mm	5 - 20mm
MAX. DRILLING CAPACITY	25mm	32mm	40mm
SPINDLE TAPER	MT3	MT3	MT4
SWING	608mm	630mm	630mm
MAX. SPINDLE STROKE	125	150mm	150mm
OVERALL HEIGHT	1508mm	1665mm	2040mm



NEW RANGE

METALWORK - PILLAR DRILLS




TO PLACE AN ORDER: (3) 01509 500500

METAL-CUTTING CIRCULAR SAWS DESIGNED FOR INDUSTRIAL APPLICATIONS.



Item No	01554	01565		
MODEL	SIP 10" 250MM Industrial Circular Saw	SIP 12" 315MM INDUSTRIAL CIRCULAR SAW		
INPUT SUPPLY	230v (13A)	400v (5A)		
MOTOR	1.1kW (1.5hp)	750w (1hp) / 1.3kW (1.7hp)		
BLADE SPEEDS	42rpm	18rpm @ 1hp / 36rpm @ 1.7hp		
CUTTING CAPACITY	@ 90°: 60mm (round) / 75 x 45mm (box) @ 45°: 55mm (round) / 55 x 45mm (box)	@ 90°: 100mm (round) / 140 x 90mm (box) @ 45°: 90mm (round) / 100 x 90mm (box)		
BLADE SIZE	250mm max.	315mm max.		

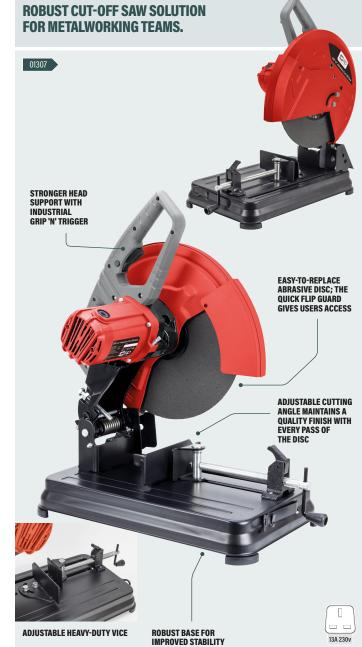

Item No	01307
MODEL	SIP 14" 355MM ABRASIVE CUT-OFF SAW
INPUT SUPPLY	230v (13A)
MOTOR	2300w
BLADE SPEEDS	3800rpm
CUTTING CAPACITY	@ 90°: 130mm (round) / 120 x 120mm (box) / 180 x 85mm (rect.) / 130 x 130mm (angle) @ 45°: 110mm (round) / 90 x 90mm (box) 100 x 80mm (rect.) / 90 x 90mm (angle)
BLADE SIZE	355mm (14")

SIP METAL-CUTTING CIRCULAR SAW BLADES & DISCS

Item No	DESCRIPTION
06891	SIP 14" Abrasive Disc (for 01307)
05210	SIP Blade - 250 x 2.0 x 32mm Z160 T5 (for 01554)
05212	SIP Blade - 250 x 2.0 x 32mm Z200 T4 (for 01554)
05199	SIP Blade - 315 x 2.5 x 40mm Z160 T5 (for 01565)



METALWORK - METAL-CUTTING SWIVEL HEAD BANDSAWS

METAL-CUTTING BANDSAWS DESIGNED FOR PROFESSIONAL HEAVY-DUTY APPLICATIONS.

All bandsaws supplied with Bi-Metal, Vari-pitch blades



01593

- Heavy-duty motor
- 4 speed belt-driven gearbox for varying material thicknesses and types
- Cast iron swivel head
 Reduced vibration, increased
 accuracy and quick angle
 adjustments
- Adjustable hydraulic ram dampener for smooth cutting descent and control, aids blade performance
- Coolant system extends blade life and cools the cutting area





SAFETY FEATURE; 24V CONTROL CIRCUIT





Ite	m No	MODEL	INPUT SUPPLY	MOTOR	SPEEDS	•	CUTTING CAPACITY		FEATURES
01	1572	SIP 6" 152MM SWIVEL HEAD SAW	230v (13A)	370w (0.5hp)	3 speeds 20/29/50mtr/min	@ 0°: 110mm @ 45°: 85mm	@ 0°: 110 x 110mm @ 45°: 85mm	@ 0°: 110 x 150mm @ 45°: 85 x 110mm	SWIVEL BOW
01	1593	SIP 8" 203MM SWIVEL HEAD SAW	230v (13A)	1.1kW (1.5hp)	4 speeds 22/33/45/65mtr/min	@ 0°: 178mm @ 45°: 127mm	@ 0°: 178 x 178mm @ 45°: 127 x 127mm	@ 0°: 178 x 210mm @ 45°: 85 x 140mm	SWIVEL BOW

METAL-CUTTING BANDSAWS DESIGNED FOR PROFESSIONAL HEAVY-DUTY APPLICATIONS.

All bandsaws supplied with Bi-Metal, Vari-pitch blades



- 4 speed belt-driven gearbox for varying material thicknesses and types
- · Coolant system extends blade life and cools the cutting area
- Cast iron head reduced vibration, increased accuracy
- Large adjustable vice ideal for large steel sections, and for straight and angle cuts
- Adjustable hydraulic ram dampener for smooth cutting descent and control, aids blade performance
- Single and three phase heavy-duty motor models for professional workshops



SAFETY FEATURE; 24V CONTROL CIRCUIT







	n No MODEL			operno.	CUTTING CAPACITY			
Item No			MOTOR	SPEEDS				
01594	SIP 12" 304MM 230V SAW (1ph)	230v (13A)	1.1kW (1.5hp)	4 speeds 22/33/45/65mtr/min	@ 0°: 178mm @ 45°: 127mm	@ 0°: 178 x 178mm @ 45°: 127 x 127mm	@ 0°: 178 x 305mm @ 45°: 120 x 125mm	
01595	SIP 12" 304MM 400V SAW (3ph)	400v (5A)	0.75kW (1hp)	4 speeds 22/33/45/65mtr/min	@ 0°: 178mm @ 45°: 127mm	@ 0°: 178 x 178mm @ 45°: 127 x 127mm	@ 0°: 178 x 305mm @ 45°: 120 x 125mm	





METAL-CUTTING BANDSAWS DESIGNED FOR PROFESSIONAL HEAVY-DUTY APPLICATIONS.

All bandsaws supplied with Bi-Metal, Vari-pitch blades



Item No	MODEL	INPUT SUPPLY	MOTOR	SPEEDS	•	CUTTING CAPACI	FEATURES
01573	SIP 12" 304MM 230V GEAR-DRIVE SAW	230v (13A)	1.1kW (1.5hp)	3 speeds 39/55/67mtr/min		@ 0°: 180 x 180mm @ 45°: 110 x 110mm	GEAR DRIVEN

METAL-CUTTING BANDSAW DESIGNED FOR PROFESSIONAL HEAVY-DUTY APPLICATIONS.

All bandsaws supplied with Bi-Metal, Vari-pitch blades



- Adjustable hydraulic ram dampener for smooth cutting descent and control, aids blade performance
- Coolant system extends blade life and cools the cutting area
- Large adjustable vice ideal for large steel sections, for straight And angle cuts
- Heavy-duty cast iron bow reduced vibration, increased accuracy
- 4 speed belt-driven gearbox
- Single and three phase heavy-duty motor models for professional workshops



SAFETY FEATURE; 24V CONTROL CIRCUIT







Item No	MODEL	INPUT SUPPLY	MOTOR	onerno.	CUTTING CAPACITY			
				SPEEDS	•			
01599	SIP 18" 457MM 230V SAW (1ph)	230v (13A)	1.5kW (2hp)	4 speeds 29/50/73/95mtr/min	@ 90°: 254mm @ 45°: 150mm	@ 0°: 230 x 230mm @ 45°: 130 x 130mm	@ 90°: 127 x 457mm @ 45°: 150 x 190mm	
01597	SIP 18" 457MM 400V SAW (3ph)	400v (5A)	1.5kW (2hp)	4 speeds 29/50/73/95mtr/min	@ 90°: 254mm @ 45°: 150mm	@ 0°: 230 x 230mm @ 45°: 130 x 130mm	@ 90°: 127 x 457mm @ 45°: 150 x 190mm	



METALWORK - METAL-CUTTING BANDSAWS (PULL DOWN)



Item No	Item No MODEL		INPUT SUPPLY MOTOR	SPEEDS	CUTTING CAPACITY			BLADE
	SUPPLY						SIZE	
01520	SIP 8" 203MM SWIVEL HEAD PULL-DOWN SAW	230v (13A)	1.1kW (1.5hp)	80mtr/min	@ 90°: 170mm @ 60°: 70mm @ 45°: 120mm	@ 90°: 170 x 170mm @ 60°: 60 x 60mm @ 45°: 110 x 110mm	@ 90°: 170 x 200mm @ 60°: 60 x 60mm @ 45°: 110 x 110mm	20 x 0.9 x 2085mm
01524	SIP 10" 254MM SWIVEL HEAD PULL-DOWN SAW	230v (13A)	1.1kW (1.5hp)	72mtr/min	@ 60°: 90mm	@ 90°: 200 x 200mm @ 60°: 100 x 100mm @ 45°: 160 x 160mm	@ 60°: 85 x 85mm	27 x 0.9 x 2455mm

All bandsaws supplied with Bi-Metal, Vari-pitch blades



Item No	MODEL	INPUT Supply	MOTOR	SPEEDS	•	CUTTING CAPACIT	Y	BLADE SIZE
01526	SIP 10" 254MM VARI-SPEED SWIVEL HEAD SAW	230v (13A)	1.1kW (1.5hp)	Variable 0 - 90mtr/min	@ 0°: 220mm @ 30°: 190mm @ 45°: 160mm @ 60°: 100mm	@ 0°: 200mm @ 30°: 180mm @ 45°: 160mm @ 60°: 100mm	@ 0°: 260 x 140mm @ 30°: 200 x 140mm @ 45°: 160 x 140mm @ 60°: 120 x 140mm	27 x 0.9 x 3160mm

SIP METAL-CUTTING BANDSAW BLADES

Item No	DESCRIPTION
WK04-00650	SIP Blade - 1630 x 12.5 x 0.64mm Carbon Steel 16 TPI (for 01572)
07739	SIP Blade - 2362 x 20 x 0.9mm M42 5/8 TPI (for 01593, 01594, 01595)
01427	SIP Blade - 3280 x 27 x 0.9mm M42 4/6 TPI (for 01597, 01599)
WK04-00400	SIP Blade - 2085 x 20 x 0.9mm M42 4/6 TPI (for 01520)
WK04-00401	SIP Blade - 2455 x 27 x 0.9mm M42 4/6 TPI (for 01524)
WK04-00651	SIP Blade - 2450 x 27 x 0.9mm M42 4/6 TPI (for 01526)
WK04-00652	SIP Blade - 2360 x 19 x 0.9mm M42 4/6 TPI (for 01573)
WK04-00653	SIP Blade - 3160 x 27 x 0.9mm M42 4/6 TPI (for 01530)






METALWORK - METAL-CUTTING BANDSAWS (PULL DOWN)

01530

- Manual or semi-automatic feed control ideal for individual manual cutting or semi-automatic operation for larger cuts
- · Integrated coolant system

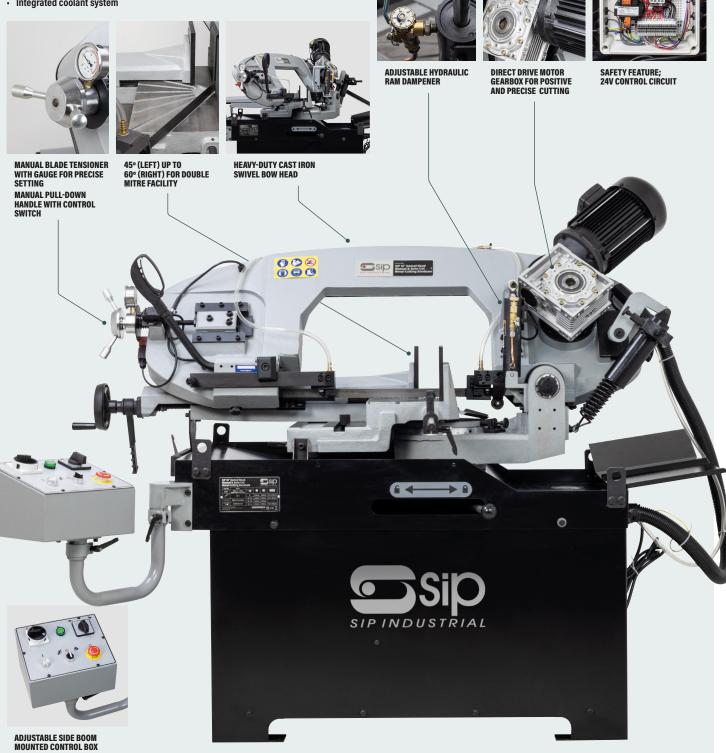









Item No	MODEL	INPUT SUPPLY	MOTOR	SPEEDS	•	CUTTING CAPACI	TY III	BLADE SIZE
01530	SIP 15" 380MM SWIVEL HEAD MANUAL & AUTO-CUT SAW	400v (3 Phase)	1.5kW (2.0hp)	2 speeds 34/68mtr/min	@ 0°: 270mm @ 45°: 240mm @ 60°: 160mm @ 45°(L): 210mm	@ 0°: 260mm @ 45°: 180mm @ 60°: 100mm @ 45°(L): 180mm	@ 0°: 220 x 370mm @ 45°: 160 x 240mm N/A @ 45°(L): 150 x 180mm	27 x 0.9 x 3160mm

NEW PRODUCT

METALWORK - PROCESSING





SIP METAL DUST COLLECTOR

Delivers powerful airflow for at-source metal grinding extraction in workshop or manufacturing environments

Compatible with a variety of grinding, linishing and fettling equipment, this easy-to-manoeuvre dust collector is suitable for processing ferrous and non-ferrous metals and stainless steel

- 230v (13A) input supply
- 750w (1hp) brushless induction motor
- 1100mtr3/hr maximum airflow



POWERFUL BRUSHLESS INDUCTION MOTOR

Item No: 01996







EASY ACCESS WASTE COLLECTION TRAY



2x 100MM Ø OUTLETS ONE ON EACH SIDE OF UNIT



STURDY HANDLE FOR





METAL DUST Extraction Port



TWO POINT BELT ACCESS WHEEL & FULL PLATEN



LONG LASTING ZIRCONIUM BONDED BELT FOR USE ON METALS INCLUDING STAINLESS STEEL

01948

- Long lasting zirconium bonded belt for use on metals including stainless steel
- · NVR switch for added safety
- Linishing head tilt to accommodate a variety of different material lengths and sizes
- · Heavy-duty pedestal stand



ADJUSTABLE TOOL SUPPORT; FOR ACCURATE POSITIONING OF THE WORKPIECE WITH ANGLE ADJUSTMENT



Item No	01960	01948	01949
MODEL	SIP 4" 100MM Belt Linisher	SIP HEAVY-DUTY 3" 76MM Belt Linisher	SIP HEAVY-DUTY 6" 152MM Belt Linisher
INPUT SUPPLY	230v (13A)	400v (3ph)	400v (3ph)
MOTOR	1.5kW (2hp)	3kW (4hp)	3kW (4hp)
BELT SIZE	1220mm x 100mm / P60	2000mm x 75mm / P80	2000mm x 150mm / P80
BELT SPEED	19mtr/sec	34mtr/sec	34mtr/sec
FLAT GRINDING	860mm	530mm	530mm
CONTACT WHEEL	125 x 100mm	200 x 75mm	225 x 150mm
WORKING HEIGHT	800mm	475 - 1240mm	475 - 1240mm
WEIGHT	40kg	75kg	100kg

SIP REPLACEMENT LINISHER BELTS

Item No	DESCRIPTION
WK05-00467	SIP 710mm x 50mm Aluminium Oxide Belt P80 (for 01459)
WK05-00286	SIP 1220mm x 100mm Zirconium Belt P80 (for 01960)
08662	SIP 2000mm x 75mm Zirconium Belt P80 (for 01948)
08668	SIP 2000mm x 150mm Aluminium Oxide Belt P60 (for 01949)
08670	SIP 2000mm x 150mm Aluminium Oxide Belt P80 (for 01949)
08678	SIP 2000mm x 150mm Zirconium Belt P80 (for 01949)





SIP 8" 203MM PROFESSIONAL METAL BUFFER POLISHER

IDEAL FOR BUFFING AND POLISHING METAL MATERIALS WHEN FINISHING OR PROCESSING METALWORK ITEMS

- Highly versatile and durable, buffer polisher machines are an essential item for any professional metalwork workshop.
- Quality bearings and machined parts for long life use
- · Robust cast iron base ensures stability when in operation
- Effective forced air cooling for increased performance
- Cast iron base with rubber feet for reduced vibration



SIP 8"x 2" 203 x 50MM PROFESSIONAL BENCH GRINDER / LINISHER

A DUAL PROCESS METALWORK MACHINE IDEAL FOR GRINDING, SHAPING AND SMOOTHING METAL WORKPIECES. IT'S ALSO SUITABLE FOR SHARPENING WORKSHOP TOOLS.







SCAN HERE



07650

SIP PROFESSIONAL BENCH GRINDERS

OFFERING HEAVY-DUTY PERFORMANCE IN A RANGE OF GENERAL METAL GRINDING APPLICATIONS INCLUDING SHARPENING OF TOOLS, DRILL BITS, CHISELS, AND KNIVES THANKS TO FINE AND COARSE GRIT WHEELS; IDEAL FOR SMALL AND LARGE METAL REMOVAL

· Cast iron base with rubber feet for reduced vibration



Item No	07698	01459	07625	07628	07650
MODEL	SIP 8" 203MM Professional Metal Buffer Polisher	SIP 8"x 2" 203 x 50MM Professional Bench Grinder/Linisher	SIP 6" 152MM PROFESSIONAL BENCH GRINDER	SIP 8" 203MM PROFESSIONAL BENCH GRINDER	SIP 10" 254MM Professional Bench Grinder
INPUT SUPPLY	230v 50Hz	230v 50Hz	230v 50Hz	230v 50Hz	230v 50Hz
MOTOR	550w S2 30mins / 370w S1	550w S2 30mins / 370w S1	370w S2 30mins / 250w S1	550w S2 30mins / 370w S1	750w S2 30mins / 550w S1
WHEEL SPEED	2980rpm	2980rpm	2980rpm	2980rpm	2980rpm
WHEEL DIAMETER	8" (200mm)	8" (200mm)	6" (150mm)	8" (200mm)	10" (250mm)
WHEEL WIDTH	%" (10mm)	3%" (10mm)	3/4" (20mm)	1" (25mm)	1" (25mm)
BORE SIZE	5%" (15.88mm)	5%" (15.88mm)	½" (12.7mm)	%" (15.88mm)	3/4" (20mm)
BELT SIZE / GRIT	n/a	710 x 50mm / P60	n/a	n/a	n/a
ADDITIONAL FEATURES	2x MOP wheels for 1st & 2nd finishing	Integrated worklight	Wire wheel included	Wire Wheel included	n/a

SAFE AND EASY TO USE

Perfect for releasing seized fixings, components and parts from vehicles in car and commercial environments. Also suitable for metalworking heat treatments such as annealing and shrink fitting.

Easy to control and highly efficient, induction heaters offer greater levels of safety compared to oxyacetylene and other methods which use a naked flame.

Our range features handheld and portable models which are easy to use around automotive and metalworking workshops.



Item No	01161	01156	01157
MODEL	SIP 1200W HANDHELD INDUCTION HEATER KIT	SIP 1500W INDUCTION HEATER KIT	SIP 3700W Induction Heater
INPUT SUPPLY	230v (13A)	230v (13A)	230v (16A)
INDUCTION POWER	1.2kW	1.5kW	3.7kW
POWER STEPS	Fixed	Fixed	Infinitely Variable
TIME TO HEAT (M8 bolt @ 300°C)	120secs	60secs	30secs
INDUCTION CABLE LENGTH	n/a	850mm	2mtr
POWER CABLE LENGTH	3mtr	3mtr	3mtr
COOLING SYSTEM	Fan Cooled	Fan Cooled	Liquid Cooled Torch and Cable
INVERTER VENTILATION	Cooling Fan	Cooling Fan	Twin Cooling Fans

SIP INDUCTION HEATER CONSUMABLES



Item No	FOR USE WITH 01161 & 01156
HY02-00930	SIP 1000mm Induction Flexi Coil
HY02-00932	SIP Induction Coil Pad
HY02-00933	SIP Induction Flat Coil
HY02-00934	SIP Induction Hooked Coil
HY02-00938	SIP 23mm Induction Coil Straight
HY02-00942	SIP 45mm Induction Coil Straight



Item No	FOR USE WITH 01157
HY02-00943	Pad Coil Holder Extender
HY02-00944	Pad Coil Inclined
HY02-00945	Pad Coil Flat

SEE WEBSITE FOR FULL RANGE OF INDUCTION HEATER CONSUMABLES





Item No	06865	06888	06897	06825
MODEL	SIP SUB 3040-FS Water Pump	SIP SUB 3075-FS Dirty Water Pump	SIP SUB 3010-SS HEAVY-DUTY DIRTY WATER PUMP	SIP SUB 3075-SS HEAVY-DUTY DIRTY WATER PUMP
INPUT SUPPLY	230v (13A)	230v (13A)	230v (13A)	230v (13A)
MOTOR	400w (0.5hp)	750w (1hp)	1000w (1.3hp)	750w (1hp)
FLOW RATE	9,000ltr/hr	14,100ltr/hr	18,000ltr/hr	16,500ltr/hr
OUTLET Ø		25 - 40mr	m / 1" BSP	
PUMPING HEAD	6mtr	8mtr	9mtr	8mtr
PARTICLE Ø	5mm	35mm		
OPERATING DEPTH	7n	7mtr 10mtr		mtr
POWER CABLE LENGTH	9mtr	10mtr		



SIP SUCTION & LAYFLAT DELIVERY HOSES

Item No	DIAMETER	TYPE	LENGTH
07671	1"	Layflat Delivery	10mtr
07615	1¼"	Layflat Delivery	10mtr
07630	1½"	Layflat Delivery	10mtr
07631	1½"	Layflat Delivery	100mtr
07621	2"	Layflat Delivery	10mtr
07622	2"	Layflat Delivery	100mtr
07692	3"	Layflat Delivery	10mtr
07693	3"	Layflat Delivery	30mtr



SIP 1" STAINLESS STEEL SURFACE-MOUNTED BOOSTER WATER PUMP

- Designed for boosting and maintaining water pressure
- or from ponds, and external supplies for garden and agricultural applications
- 230v (13A) input supply
- Suitable for fixed installation from mains water supply switch; controlled between 1.4 - 2.8bar (20 - 40.6psi)
- Water pressure is maintained using a fitted pressure
 - 1" outlet / inlet diameter

- 35°C max. water temperature
- Heavy-duty corrosion-resistant stainless steel
- Heavy-duty braided pump connector hose
- Pump motor switches on/off depending on demand

OPTIONAL Inlet filter and NRV Foot Valve available see table below













Item No	MODEL	ENGINE	MAX. PUMPING HEAD	WATER FLOW RATE	MAX. SUCTION HEAD	OUTLET DIAMETER
04913	SIP 1" PETROL WATER PUMP	SIP 2.6hp	30mtr	116ltr/min (7mtr³/hr)	7mtr	25mm (1")
03933	SIP 2" PETROL WATER PUMP	SIP 7hp	30mtr	550ltr/min (33mtr³/hr)	7mtr	50mm (2")
04919	SIP 3" PETROL WATER PUMP	SIP 7hp	28mtr	1000ltr/min (60mtr³/hr)	7mtr	80mm (3")
04909	SIP 3" DIESEL WATER PUMP (ELECTRIC START)	SIP 6hp	30mtr	1000ltr/min (60mtr³/hr)	8mtr	80mm (3")



Introducing our full new Welding & Plasma Cutting range, with models that include:



4th Generation Inverter
Technology



─ Intuitive LCD & LED Displays



Full ECO Design Compliant

Welding Range



Range of Welder & Trolley
Package Deals



Autonomous Synergic Welding Output Control



Portable & Wheel-Mounted Options

	PAGES:
MIG Multi-process • Entry Level • AUTOPLUS (Automotive) • PRO Fabrication Range	117-123
ARC Dual Process • Multi-Process • Cordless Battery • Welding Generators	125-127
TIG Dual Process - DC - AC/DC	128-129
SPOT WELDERS Handheld - Column	124
PLASMA CUTTING Entry Level • Professional	130-131
HEADSHIELDS Electronic · Panoramic · PAPR	132-133
FUME EXTRACTION Mobile · Wall-Mounted	134-135
ACCESSORIES & CONSUMABLES	136-138





WELDMATE® **MIG WELDER**
















SIP 3 TIER WELDING CART

- Suitable for SIP WELDMATE® machines: 05705, 05707, 05710, 05711, 05715, 05717, 05723, 05724, 05729, 05731, 05732, 05733, 05734, 05736, 05737, 05738, 05739, 05740, 05756, 05773, 05770, 05771, 05775, 05781, 05793, 05794
- Suitable for SIP Plasma Cutters: 05782, 05783, 05785, 05787, 05788, 05789
- Suitable for TIGREN models: 08200, 08201, 08202, 08203, 08204

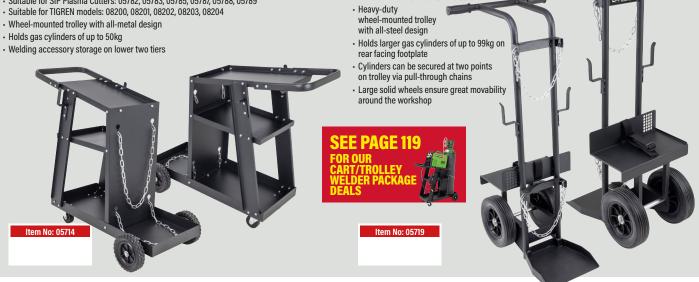

SIP LARGE CYLINDER WELDING TROLLEY

WELDMATE® PRO Inverter Welders

- Compatible with all SIP WELDMATE® AUTOPLUS &

WELDMATE® IG/ARC/TIG WELDERS



SUPPLIED WITH ALL ACCESSORIES TO WELD STRAIGHT-FROM-THE-BOX:

- Electrode holder Earth cable with clamp Gas hose with clamps
- · Welding wire reel
- Wire feederWire brush





Compact, portable and versatile inverter welders designed for entry level users and light industry applications.

- Multi-process MIG/ARC/TIG inverter welder designed for greater flexibility - ideal for entry level users and small workshop applications.



You Tube





05731, 05733 Accessory Kit



DURABLE 2 ROLL WIRE FEEDER FOR SMOOTH & CONSISTENT WIRE FLOW (05733, 05737)



EASY ACCESS TO REEL HUB ASSEMBLY & WIRE FEEDER (05731, 05733)



Item No	05731	05733
MODEL	SIP WELDMATE [®] 120a Mig/Arc/Tig	SIP WELDMATE [®] 160a Mig/Arc/Tig
INPUT SUPPLY	230v (13A)	230v (16A)
OUTPUT CURRENT	20 - 120A (MIG) / 20 - 100A (ARC) / 20 - 100A (TIG)	20 - 160A (MIG) / 20 - 140A (ARC) / 20 - 140A (TIG)
MIG DUTY CYCLE @40°C	120A @ 15%	160A @ 15%
OUTPUT POWER SETTINGS	Infinitely Variable	Infinitely Variable
APPROX. WELDING THICKNESS	0.8 - 4.0mm (mild steel)	0.8 - 5.5mm (mild steel)
WIRE SIZE	0.8 - 0.9mm	0.8 - 0.9mm
WIRE SPOOL SIZE	0.7kg	0.7kg / 5kg
WEIGHT	7.0kg	8.1kg
ADDITIONAL FEATURES	3-IN-1 FUNCTION (MIG/ARC/TIG)	3-IN-1 FUNCTION (MIG/ARC/TIG)

SIP 17V TIG TORCH (with small & large cable plugs)

AVAILABLE - 08206A (FOR USE WITH 05731, 05733)



08206A TIG TORCH



WELDMATE® AUTOPLUS WELDER CART/TROLLEY PACKAGE DEALS



SIP's range of AUTOLPUS package deals enhance workshop accessibility for professional welders, offering greater application flexibility in automotive and garage environments.

- Offers wheel-mounted functionality for compact and modern inverter welders
- · Easy and dedicated storage of gas cylinders and welding accessories
- Improved mobility for safe and efficient workspace movement





WELDMATE® AUTOPLUS MIG/ARC/TIG SYNERGIC WELDERS





Item No	05737	05738	05739
MODEL	SIP WELDMATE® AUTOPLUS 130A MIG/ARC/TIG SYNERGIC	SIP WELDMATE® AUTOPLUS 160A MIG/ARC/TIG SYNERGIC	SIP WELDMATE® AUTOPLUS 180A MIG/ARC/TIG SYNERGIC
INPUT SUPPLY	230v (13A)	230v (16A)	230v (16A)
OUTPUT CURRENT	20 - 130A (MIG) / 20 - 130A (ARC) / 20 - 130A (TIG)	20 - 160A (MIG) / 20 - 160A (ARC) / 20 - 160A (TIG)	20 - 180A (MIG) / 20 - 180A (ARC) / 20 - 180A (TIG)
MIG DUTY CYCLE @20°C	130A @ 30%	160A @ 30%	180A @ 30%
OUTPUT POWER SETTINGS	Infinitely Variable	Infinitely Variable	Infinitely Variable
APPROX. WELDING THICKNESS	0.8 - 4.5mm (mild steel)	0.8 - 5.5mm (mild steel)	0.8 - 6.0mm (mild steel)
WIRE SIZE	0.8 - 0.9mm	0.8 - 0.9mm	0.8 - 0.9mm
WIRE SPOOL SIZE	0.7kg	0.7kg / 5kg	0.7kg / 5kg
WEIGHT	6.3kg	8.7kg	8.7kg
ADDITIONAL FEATURES	3-IN-1 FUNCTION	3-IN-1 FUNCTION	3-IN-1 FUNCTION













LOWS FOR AUTONOMOUS CONTROL Of the Welding Parameters For ease of Operation





INTUITIVE CONTROL PANEL TO SELECT WELDING FUNCTIONS (05737, 05738, 05739, 05740) 0 05740 CONTROL PANEL PROTECTIVE VISOR

HIGH 80% DUTY CYCLE

PURE · SYNERGIC



PURE · SYNERGIC





WHEEL-MOUNTED DESIGN INCLUDES RETAINING STRAPS FOR GAS CYLINDERS UP TO 99KG (05751)



MIG TORCH INCLUDED (05751)

Item No	05740	05751
MODEL	SIP WELDMATE® AUTOPLUS 200A MIG/ARC/TIG SYNERGIC	SIP WELDMATE® AUTOPLUS 250A MIG/ARC/TIG SYNERGIC
INPUT SUPPLY	230v (16A)	230v (32A)
OUTPUT CURRENT	20 - 200A (MIG) / 20 - 200A (ARC) / 20 - 200A (TIG)	30 - 250A (MIG) / 30 - 250A (ARC) / 10 - 250A (TIG)
MIG DUTY CYCLE @20°C	200A @ 30%	250A @ 80%
OUTPUT POWER SETTINGS	Infinitely Variable	Infinitely Variable
APPROX. WELDING THICKNESS	0.8 - 7.0mm (mild steel)	0.8 - 8.5mm (mild steel)
WIRE SIZE	0.8 - 0.9mm	0.8 - 1.2mm
WIRE SPOOL SIZE	0.7kg / 5kg	5kg / 15kg
WEIGHT	8.7kg	40.0kg
ADDITIONAL FEATURES	3-IN-1 FUNCTION	3-IN-1 FUNCTION

05751

SIP 17V TIG TORCH (with small & large cable plugs)

AVAILABLE - 08206A (FOR USE WITH 05737, 05738, 05739, 05740, 05751)



08206A TIG TORCH



WELDMATE® PRO MIG/ARC/TIG SYNERGIC WELDERS











ADVANCED MIG WELDING SPRAY TRANSFER (05735)



Item No	05734	05735
MODEL	SIP WELDMATE® PRO 200A MIG/ARC/TIG SYNERGIC	SIP WELDMATE® PRO 200A MIG/ARC/TIG PULSE SYNERGIC
INPUT SUPPLY	230v (16A)	230v (16A)
OUTPUT CURRENT	20 - 200A (MIG) / 20 - 200A (ARC) / 20 - 200A (TIG)	20 - 200A (MIG) / 30 - 170A (Pulsed MIG) / 20 - 180A (ARC) / 20 - 180A (TIG)
MIG DUTY CYCLE @20°C	200A @ 30%	200A / 170A (Pulsed) @ 30%
OUTPUT POWER SETTINGS	Infinitely Variable	Infinitely Variable
APPROX. WELDING THICKNESS	0.8 - 7mm (mild steel) / 2.5 - 7mm (aluminium)	0.8 - 7mm (mild steel) / 2.5 - 7mm (aluminium)
WIRE SIZE	0.6 - 1mm	0.6 - 1.2mm
WIRE SPOOL SIZE	0.7kg / 5kg	5kg / 15kg
WEIGHT	11.7kg	14.8kg
ADDITIONAL FEATURES	3-IN-1 FUNCTION	4-IN-1 FUNCTION

4-IN-1

FUNCTION WELDER

PULSE · SYNERGIC





Item No: 08206A TIG TORCH











New wheel-mounted models available as compact or with separate wire feeds for added flexibility. Featuring MIG/ARC/TIG or MIG/ARC process functions for greater application versatility.

All feature synergic control for single dial adjustment of welding voltage & wire feed speed.

- In-built aluminium Pulse MIG welding program (not 05754)
- Swivel and wheel mounted wire feed unit (not 05752)
- Supplied with 5mtr interconnecting harness (05753, 05754)
- Cast aluminium 4-roll wire feed drive systems for higher feed speeds
- Holds up 15kg wire spool sizes
- · Fully enclosed welding wire protector
- · Wheel-mounted with lockable castors







HEAVY-DUTY 4 ROLL CAST ALUMINIUM WIRE FEEDER FOR SMOOTH & CONSISTENT WIRE FLOW (05752, 05753, 05754)



WHEEL MOUNTED DESIGN INCLUDES RETAINING STRAPS FOR GAS CYLINDER UP TO 99KG (05753, 05754)

PURE · SYNERGIC



Item No	05752	05753	05754
MODEL	SIP WELDMATE [®] Pro 250A Mig/Arc/Tig Synergic Compact	SIP WELDMATE® PRO 250A MIG/ARC/TIG SYNERGIC WITH SEPARATE WIRE FEED	SIP WELDMATE [®] PRO 350A MIG/ARC SYNERGIC WITH SEPARATE WIRE FEED
INPUT SUPPLY	230v (32A)	230v (32A)	400v (32A)
OUTPUT CURRENT	30 - 250A (MIG) / 30 - 250A (ARC) / 10 - 250A (TIG)	30 - 250A (MIG) / 30 - 250A (ARC) / 10 - 250A (TIG)	40 - 350A (MIG) / 40 - 350A (ARC)
MIG DUTY CYCLE @20°C	250A @ 80%	250A @ 80%	350A @ 100%
OUTPUT POWER SETTINGS	Infinitely Variable	Infinitely Variable	Infinitely Variable
APPROX. WELDING THICKNESS	0.8 - 8.5mm (mild steel) / 2.5 - 8.5mm (aluminium)	0.8 - 8.5mm (mild steel) / 2.5 - 8.5mm (aluminium)	0.8 - 12mm (mild steel)
WIRE SIZE	0.8 - 1.2mm	0.8 - 1.2mm	0.8 - 1.2mm
WIRE SPOOL SIZE	5kg / 15kg	5kg / 15kg	5kg / 15kg
WEIGHT	40.0kg	32.0kg (welder) / 15kg (wire feed)	40.0kg (welder) / 15kg (wire feed)
ADDITIONAL FEATURES	3-IN-1 FUNCTION	3-IN-1 FUNCTION	2-IN-1 FUNCTION


PURE · SYNERGIC

SPOT WELDERS

WELDMATE® PRO **SPOT WELDERS**

Ideal for a range of automotive and sheet metal applications, SIP's range of handheld and column spot welders are ideal for both light-duty and heavy-duty uses.



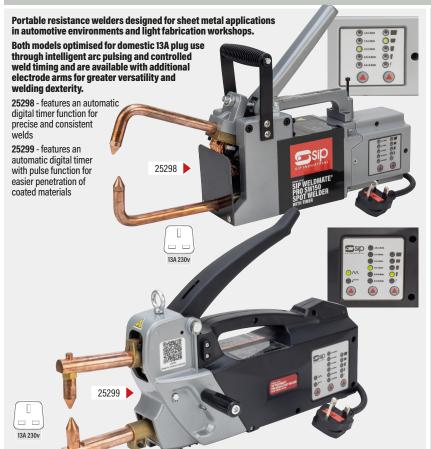

SIP WATER COOLER (for SIP CSW25P)

- 400v input supply
- 8ltr/min water flow rate

Item No: 25125



SIP CSW25P PNEUMATIC **COLUMN SPOT** WELDER

- 400v (50A) 1-phase input supply
- 50kVA max / 25kVA @ 50% welding output
- 340 480mm standard arm length
- 4bar 8bar air pressure
- Single and double spot welding modes; perfect on oxidised or coated steels Digital display for welding current and
- welding time Adjustable air regulator with dampener;
- controls air pressure and arm descent speed 2 stage pneumatic foot pedal; for precise workpiece
- positioning Fitted with high- quality water cooling

hoses



Item No	25298	25299
MODEL	SIP WELDMATE® PRO SW150 SPOT WELDER WITH TIMER	SIP WELDMATE° PRO SW200 SPOT WELDER WITH TIMER & PULSE
INPUT SUPPLY	230v (13A)	230v (13A)
MAX. WELDING THICKNESS	1.5+1.5mm / 5+5mm Ø Bar (mild steel)	2+2mm / 6+6mm Ø Bar (mild steel)
SPOT DURATION	12 - 900ms	80 - 1800ms
WELDS PER MINUTE	3	4
MAX. ELECTRODE FORCE	460N	460N
WEIGHT	12.6kg	9.7kg
ADDITIONAL FEATURES	AUTOMATIC DIGITAL TIMER Supplied with additional electrode tips specifically designed to work from a 13a supply	AUTOMATIC DIGITAL TIMER WITH PULSE FUNCTION Supplied with additional electrode Tips Specifically designed to work From a 13a Supply

SIP CSW25P PNEUMATIC COLUMN SPOT WELDER

400v (50A) 1-phase 5+5mm / 20+20mm Ø Bar (mild steel) 0.02 - 1.98sec 30 1750N 180.0kg

DIGITAL CONTROL FOR WELD CURRENT & TIME ADJUSTABLE AIR REGULATOR WITH DAMPENER 2 STAGE PNEUMATIC FOOT PEDAL

SIP SPOT WELDER ARMS & ELECTRODES

Easy-to-fit accessories are sold separately as individual parts or available as a bodywork kit.





Item No:	SIP SPOT WELDER ARMS (ø20mm) for 25299
25413	120mm Arms with Straight Electrodes
25412	120mm Arms with Offset Electrodes
25414	350mm Arms with Offset Electrodes
25410	350mm Restricted Access Arms with Offset Electrodes
25411	120mm Arms with Swan Neck Electrodes
25425	SIP Spot Welder 5pc Bodywork Kit for 25299





INVERTER WELDERS - ARC

WELDMATE® PRO ARC/TIG WELDERS







These powerful, compact and lightweight inverter welders feature a range of easy-touse welding functions designed for greater welding control, helping to achieve higher quality welds.

Designed for use in professional fabrication workshops. Dual voltage model available for on-site applications.

All feature Synergic Control which adjusts the welding current output according to the electrode diameter selected (material thickness also selectable on 05691).

· Features latest generation inverter technology to meet eco design compliance

- · Electrode diameter selector for optimal penetration and bead formation
- Voltage Reduction Device (VRD) prevents accidental arc strike up
- Anti-stick function prevents the welding electrode from sticking to the workpiece
- ARC force stabilises the arc for greater welding control and efficiency
- · Hot start to improve arc ignition and help to penetrate thicker materials









SUPPLIED WITH 3MTR ELECTRODE LEAD, 3MTR EARTH LEAD & WELDING HAMMER/BRUSH



PRODUCTS









Item No	05690	05696	05691
MODEL	SIP WELDMATE [®] Pro 140A ARC/TIG	SIP WELDMATE° PRO 180A ARC/TIG	SIP WELDMATE® PRO 200A ARC/TIG DUAL VOLTAGE
INPUT SUPPLY	230v (13A)	230v (16A)	230v (16A) / 110v (16A)
ARC & TIG CURRENT OUTPUT	10 - 140A	10 - 180A	10 - 200A / 10 - 100A
ARC & TIG DUTY CYCLE @20°C	140A @ 30%	180A @ 30%	200A @ 40% / 100A @ 20%
ELECTRODE DIAMETER	1.6 - 3.2mm	1.6 - 4mm	1.6 - 5mm
APPROX. WELDING THICKNESS	1.6 - 7mm (mild steel)	1.6 - 8mm (mild steel)	1.5 - 10.5mm (mild steel) 230v / 1.5 - 5.5mm (mild steel) 10v
DIGITAL DISPLAY	✓	✓	✓
WEIGHT	4.4kg	4.8kg	8.2kg
ADDITIONAL FEATURES	LIFT-TIG FUNCTION GENERATOR FRIENDLY ELECTRODE DIAMETER SELECTOR VOLTAGE REDUCTION DEVICE (VRD)	LIFT-TIG FUNCTION GENERATOR FRIENDLY ELECTRODE DIAMETER SELECTOR VOLTAGE REDUCTION DEVICE (VRD)	LIFT-TIG FUNCTION GENERATOR FRIENDLY ELECTRODE DIAMETER & MATERIAL THICKNESS SELECTOR VOLTAGE REDUCTION DEVICE (VRD)















SUPPLIED WITH FAST CHARGER

Item No	05712			
MODEL	SIP WELDMATE® 180A ARC/TIG CORDLESS BATTERY WELDER			
BATTERY TYPE	Lithium-lon			
BATTERY CAPACITY		740	Wh	
CHARGER VOLTAGE	230v AC +/- 10%			
CHARGING TIME	1.5hrs			
BATTERY OUTPUT VOLTAGE	74V			
CHARGING CURRENT	8A			
WELDING PROCESS	MMA TIG		TIG	
WELDING CURRENT RANGE	10A - 180A 10A - 150A		10A - 150A	
DUTY CYCLE	180A @ 10% / 130A @ 20% / 60A @100%			
CONTINUOUS WELDING CAPACITY (ON FULL CHARGE)	20x 2.5mm rods @ 85A 14x 3.2mm rods @ 115A 6x 4mm rods		6x 4mm rods @ 160A	
WEIGHT	11.6kg			

LEADS

AVAILABLE



PROFESSIONAL WELDING GENERATORS

KOHLER IN POWER. SINCE 1920. 3 YEAR ENGINE WARRANTY PREMIER QUALITY



- KOHLER® 14hp OHV ENGINE

- · Cast iron cylinder liners
- · Splash-fed lubrication system
- · Small panel-mounted welding sockets

Item No	25167
MODEL	SIP P200W-AC
ENGINE	KOHLER® 14 HP OHV
OUTPUT CURRENT	AC
WELDING POWER	60 - 200A
APPROX. WELD THICKNESS	1.5 - 8mm
ELECTRODE SIZE	1.6 - 5mm
GENERATOR OUTPUT	7kVA
FUEL TANK CAPACITY	7.3ltr
APPROX. RUNTIME (FULL LOAD)	2.8hrs







- HONDA™ GX OHV ENGINE

- · Cast iron cylinder liners
- Splash-fed lubrication system
- Small (AC) and large (DC)
 panel-mounted welding sockets
- DC Welding: Allows for the use of specialist electrodes for ferrous and non-ferrous metals

DON'T FORGET...

SIP 1 Litre Advanced Engine Oil







Item No	25017	25169	25020	25172
MODEL	SIP P200W-AC	SIP P200W-AC ES	SIP P200W-DC	SIP P200W-DC ES
ENGINE	HONDA™ GX390 OHV	HONDA™ GX390 OHV	HONDA™ GX390 OHV	HONDA™ GX390 OHV
OUTPUT CURRENT	AC	AC	DC	DC
WELDING POWER	60 - 200A	60 - 200A	50 - 200A	50 - 200A
APPROX. WELD THICKNESS	1.5 - 8mm	1.5 - 8mm	1.5 - 8mm	1.5 - 8mm
ELECTRODE SIZE	1.6 - 5mm	1.6 - 5mm	1.6 - 5mm	1.6 - 5mm
GENERATOR OUTPUT	7kVA	7kVA	4kVA	4kVA
FUEL TANK CAPACITY	7.3ltr	7.3ltr	7.3ltr	7.3ltr
APPROX. RUNTIME (FULL LOAD)	2.45hrs	2.45hrs	2.45hrs	2.45hrs
ADDITIONAL FEATURES	-	ELECTRIC START - BATTERY INCLUDED	-	ELECTRIC START - BATTERY INCLUDED

WELDMATE® PRO DC TIG/ARC WELDERS







Ideal for skilled professionals, these powerful, compact and lightweight inverter welders feature high frequency start-up for easy arc striking and post-gas function to ensure a clean and high-quality weld.

Our higher specification model (05695) features an adjustable 8-stage TIG welding sequence and Pulse TIG parameters for greater control and welding versatility in challenging applications.

Designed for use in professional fabrication workshops and sheet metal applications.

- · Features latest generation inverter technology to meet eco design compliance
- Ideal for welding thinner materials where precise welding control is required

Suitable for mild steels, stainless steels, copper and brass
 Post gas function to prevent contaminated and brittle welds

ARC welding function for greater versatility

· Supplied with 3mtr electrode holder





INFINITELY VARIABLE DIALS
OFFER A SMOOTHER STEPLESS
OUTPUT ADJUSTMENT
(05693, 05694)



SUPPLIED WITH 3MTR TORCH & CONSUMABLES, ELECTRODE HOLDER, EARTH LEAD & GAS HOSE WITH CLAMPS (05693, 05694)





05695

ADJUSTABLE 8-STAGE TIG WELDING SEQUENCE INCLUDING PRE & POST GAS ALSO INCLUDES PULSE TIG PARAMETERS (05695)



SUPPLIED WITH 3MTR TORCH & CONSUMABLES, ELECTRODE HOLDER, EARTH LEAD & GAS HOSE WITH CLAMPS
(05995)

Item No	05693	05694	05695
MODEL	SIP WELDMATE° PRO 120A DC TIG/ARC	SIP WELDMATE° PRO 160A DC TIG/ARC	SIP WELDMATE° PRO 200A DC TIG/ARC
INPUT SUPPLY	230v (13A)	230v (16A)	230v (16A)
OUTPUT CURRENT	DC	DC	DC
TIG OUTPUT CURRENT	10 - 120A	10 - 160A	5 - 200A
TIG DUTY CYCLE @ 20°C	120A @ 30%	160A @ 30%	200A @ 30%
2 TOUCH / 4 TOUCH CONTROL	-	-	✓
PULSE TIG FUNCTION	-	-	✓
ARC OUTPUT CURRENT	10 - 100A	10 - 140A	10 - 160A
ARC ELECTRODE DIAMETER	1.6 - 3.2mm	1.6 - 3.2mm	1.6 - 4mm
WEIGHT	7.2kg	7.2kg	7.3kg
ADDITIONAL FEATURES	HIGH FREQUENCY TIG START UP ARC WELDING FUNCTION OPERATES FROM 230V (13A) SUPPLY SUITABLE FOR HOME WORKSHOPS	HIGH FREQUENCY TIG START UP Post gas function with timer Arc welding function	HIGH FREQUENCY TIG START UP ADJUSTABLE 8-STAGE TIG WELDING SEQUENCE PULSE TIG FOR PRECISE WEDLING CONTROL ARC WELDING FUNCTION





WELDMATE® PRO 200A AC/DC TIG/ARC with PULSE



Ideal for professional welding applications, this AC/DC TIG welder is designed for welding aluminium using AC function and also welds stainless steel, mild steel, copper and brass using DC function.

For superior welding control it also features four AC waveforms (square, triangular, trapezoidal and sine), TIG pulse facility and adjustable pulse parameters.

ALUMINIUM

TIG TORCH **INCLUDED**



SIP FOOT PEDAL CONTROL



INTUITIVE CONTROL PANEL FOR SELECTING WELDING FUNCTIONS

1		
Item No	05795	
MODEL	SIP WELDMATE® PRO 200A AC/DC TIG/ARC with PULSE	
INPUT SUPPLY	230v (16A)	
OUTPUT CURRENT	AC/DC	
TIG OUTPUT CURRENT	5 - 200A	
TIG DUTY CYCLE @ 60%	200A	
2 TOUCH / 4 TOUCH CONTROL	\checkmark	
PULSE	\checkmark	
ARC OUTPUT CURRENT	30 - 160A	
MMA ELECTRODE DIAMETER	1.6 - 4mm	
WEIGHT	15.9kg	
ADDITIONAL FEATURES	4X DIFFERENT AC WAVEFORMS TIG PULSE FACILITY FOR EASIER PRECISION WELDS SLOPE-UP / SLOPE-DOWN CURRENT FEATURE HF TIG / PULSE TIG / MMA ARC	

PLASMA CUTTERS



DMATE® 25A PLASMA CUTTER

13A 230v

05683

AIR CHECK FUNCTION CLEARS
PLASMA TORCH OF DEBRIS &
MOISTURE TO MAXIMISE
CUTTING QUALITY
(05683)

WELDMATE

Powerful and versatile plasma cutters designed for use in workshops, garages and agricultural settings.

Easy to operate and safer than cutting with a naked flame, these powerful and compact plasma cutters have a cutting capacity of up to 8mm thickness.

Both models operate from a 230v/13A for ease of use.

- · Infinitely variable dial for smooth, stepless output adjustment
- · Integrated 3mtr plasma torch with trigger safety guard



Item No	05782	05683
MODEL	SIP HG250 INVERTER PLASMA	SIP WELDMATE® 25A PLASMA with Internal Compressor
INPUT SUPPLY	230v (13A)	230v (13A)
OUTPUT CURRENT	15 - 25A	10 - 25A
DUTY CYCLE @20°C	25A @ 30%	25A @ 40%
CUTTING CAPACITY	5.5mm (Quality Cut) 8mm (Severance)	6mm (Quality Cut) 8mm (Severance)
POWER SETTINGS	Infinitely Variable	Infinitely Variable
COMPRESSED AIR PRESSURE REQ.	6bar (87psi)	-
TORCH CABLE LENGTH	3mtr	3mtr
WEIGHT	6.7kg	17kg
ADDITIONAL FEATURES	LIGHTWEIGHT & PORTABLE AIR PRESSURE SENSOR SWITCH PARTS-IN-PLACE SAFETY CIRCUIT	ALL-IN-ONE UNIT BUILT-IN AIR COMPRESSOR PARTS-IN-PLACE SAFETY CIRCUIT

SUPPLIED WITH ADJUSTABLE AIR REGULATOR

(05782)





applications.

of compressed air

INVERTER PLASMA CUTTERS

WELDMATE® PRO **PLASMA CUTTERS**

settings, automotive environments and agricultural workshops, these professional inverter plasma cutters

All features an infinitely variable dial for a smoother and more controllable output adjustment, which enables

- Supplied with adjustable air regulator to enable supply

cleaner cutting with minimal spatter.

- 3mtr plasma torch with trigger safety guard · Suitable for mild steel, stainless steel, aluminium, brass & copper

offer high cutting capacities and are suitable for heavy-duty



05687



05685

4 05689



SUPPLIED WITH ADJUSTABLE AIR REGULATOR TO ENABLE A CONSISTENT SUPPLY OF COMPRESSED AIR (05685, 05687)









INCLUDES P60 3MTR EURO CONNECTOR TORCH, STRAIGHT CUTTING GUIDE, ADDITIONAL ELECTRODES, NOZZLES, CERAMIC SHIELDS & TORCH SPANNER







ADJUSTABLE TIMER FOR PRE & POST AIR TO PREVENT OVERHEATING OF PLASMA TORCH CONSUMABLES (05689)



SIP METEOR 2000 ELECTRONIC WELDING HEADSHIELD

- TRUE COLOUR HD LCD Lens technology enhances detail and clarity of the weld
- Fixed 11 SHADE welding setting
- · 3/10000 second light-to-dark response time protects eyes from sudden arc
- · 2x light sensors
- Solar panel

Item No: 02819



- · Adjustable padded headband for extended comfort
- · Lightweight construction weighs only 0.35kg



SIP METEOR 2185 ELECTRONIC WELDING HEADSHIELD

- TRUE COLOUR HD LCD Lens technology enhances detail and clarity of the weld
- · Adjustable Weld / Cut / Grind mode settings: 9-13 SHADE for MMA (ARC) / MIG / TIG welding
- · 3/10000 second light-to-dark response time protects eyes from sudden arc
- · Side-mounted shade dial convenient shade control

Item No: 02883



- Automatic darkening filter (ADF) lens with sensitivity and delay controls
- 2x light sensors
- Solar panel
- . Adjustable padded headband for extended comfort
- Lightweight construction weighs only 0.48kg





x LIGHT





SIP METEOR 2300 ELECTRONIC WELDING HEADSHIELD

- TRUE COLOUR HD LCD Lens technology enhances detail and clarity of the weld
- Adjustable Weld / Cut / Grind mode settings: 9 - 13 SHADE for MMA (ARC) / MIG / TIG welding 5 - 9 SHADE for Plasma cutting 4 SHADE for grinding
- 1/10000sec light-to-dark response time protects eves from sudden arc
- 4x light sensors
- Large viewing area 100 x 59.5mm

Item No: 02884





· Test button checks headshield functions correctly

 Solar panel + 2x Lithium CR2450 3v batteries with low power warning light

Adjustable padded headband for extended comfort

· Lightweight construction - weighs only 0.5kg







SIP METEOR 2300F ELECTRONIC WELDING HEADSHIELD

- TRUE COLOUR HD LCD Lens technology enhances detail and clarity of the weld
- · Striking, distinctive flame design
- Adjustable Weld / Cut / Grind mode settings: 9 13 SHADE for MMA (ARC) / MIG / TIG welding 5 - 9 SHADE for Plasma cutting 4 SHADE for grinding
- 1/10000sec light-to-dark response time protects eyes from sudden arc
- · 4x light sensors

- · Large viewing area 100 x 59.5mm
- Test button checks headshield functions correctly
- Solar panel + 2x Lithium CR2450 3v batteries with low power warning light
- Adjustable padded headband for extended comfort
- Lightweight construction weighs only 0.5kg





4x light sensors for fast and stable lens control

Adjustable padded headband for extended comfort

Solar panel / Lithium CR2450 battery









SIP METEOR 8000 PANORAMIC ELECTRONIC WELDING HEADSHIELD

- TRUE COLOUR HD LCD Lens technology enhances detail and clarity of the weld PANORAMIC side windows aid peripheral vision (5 Shade)
- 100 x 83mm viewing area
- · SHADE RANGE:
- 9-13 SHADE for MMA (ARC) / MIG / TIG Welding 5-9 SHADE for Plasma Cutting 4 SHADE for Grinding
- 1/10000sec light-to-dark response time rapid eye protection from sudden arc
- TRUE COLOUR
 HD LCD

Test butting function

Low battery warning light

LIGHTWEIGHT - only 0.65kg





Item No: 02803

2









Item No	02814	02815	
MODEL	SIP ELECTRONIC WELDING SIP ELECTRONIC WEL HEADSHIELD PAPR WITTON		
	WELDING H	EADSHIELD	
VIEWING AREA	98 x 43mm	98 x 55mm	
WELDING SHADE	DIN 9-13 Variable External Control	DIN 9-13 Variable External Control	
GRIND SHADE	DIN 4	DIN 4	
PLASMA SHADE	-	DIN 5-9 Variable External Control	
LIGHT to DARK REACTION TIME	1/30000s (0.0003sec) 1/30000sec (0.0003sec)		
ARC SENSORS	4 4		
WEIGHT	4.6kg 4.6kg		
	AIR RES	PIRATOR	
BATTERY TYPE	Rechargeable	e Lithium-Ion	
AIR FLOW SPEEDS	2 (180 and 200ltr/min)		
APPROX. RUNTIME	10hrs (low speed) / 6hrs (high speed)		
CHARGE TIME	3hrs		
FILTRATION LEVEL	TI	12	

The European standard for Powered Air Purifying Respirators is EN12941.

This standard defines 3 classes of performance. These levels are TH1, TH2 and TH3.

The numbers define level of performance (*Inward Leakage) and the strengths of the tubes and couplings.

Maximum Inward Leakage for the classifications are:-

TH1 = 10%

TH2 = 2%

TH3 = 0.2%

SIP PAPR Filters are TH2P (Particle Filter).

*Inward Leakage is defined as the combination of contaminated air that leaks through a respirator from various sources, including face seals, valves and gaskets and the penetration through the filter.

Item No	DESCRIPTION	DIMENSIONS
WE09-00013	SIP Front Cover Lens True Colour (for 02814, 02815)	123 x 98 mm
WE09-00017	SIP Inner Cover Lens (for 02814, 02815)	107.5 x 58.6mm
WE09-00028	SIP Main HEPA Filter (for 02814, 02815)	-
WE09-00029	SIP Pre-filter (for 02814, 02815)	-

SIP's latest range of welding fume extraction continues to deliver up to 99.97% filtration capability to collect more harmful air and support meeting HSE requirements for handling weldable materials.

Fume extraction systems help to protect welding professionals, by reducing their exposure to hazardous contaminants and materials in the workshop.



MAGNETIC TILT ADJUSTABLE SUCTION HOODS (05815, 05800, 05813)

		`				
Item No	05815	05800	05813	05814	05812	05806
MODEL	SIP FX100 PORTABLE WELDING FUME EXTRACTOR	SIP FX150 PORTABLE WELDING FUME EXTRACTOR	SIP FX200 PROFESSIONAL WELDING FUME EXTRACTOR	SIP FX300 PROFESSIONAL WELDING FUME EXTRACTOR	PROFESSIONAL FX-WM 1-ARM WALL-MOUNTED WELDING FUME EXTRACTOR	PROFESSIONAL FX-WM 2-ARM WALL-MOUNTED WELDING FUME EXTRACTOR
INPUT SUPPLY	230v (13A)	230v (13A)	230v (13A)	230v (13A)	230v (13A)	230v (13A)
MOTOR POWER	1.1kW (1.5hp)	1.1kW (1.5hp)	200w (0.27hp) DIGITAL	1.5kW (2hp)	1.5kW (2hp)	1.5kW (2hp)
VARIABLE SPEED	-	✓	✓	-	-	-
MAX. FLOW RATE	163mtr³/hr	250mtr³/hr	300mtr³/hr	2500mtr³/hr	2500mtr3/hr	2500mtr³/hr
FILTRATION	99.50%	85.00%	99.97%	99.97%	99.50%	99.50%
ADJUSTABLE EXTRACTION	2mtr hose	2mtr hose	2mtr hose	2mtr flexible arm	3mtr flexible arm	2x 3mtr flexible arms
NOISE LEVEL	73dB(A)	65dB(A)	75dB(A)	75dB(A)	73dB(A)	73dB(A)
WEIGHT	18kg	20kg	25kg	70kg	100kg	100kg
ADDITIONAL FEATURES	FOR LOW/MEDIUM CONCENTRATIONS OF POLLUTANTS MAGNETIC TILT ADJUSTABLE SUCTION HOOD CARRY HANDLE	FOR LOW/MEDIUM CONCENTRATIONS OF POLLUTANTS MAGNETIC TILT ADJUSTABLE SUCTION HOOD CARRY HANDLE	FOR MEDIUM CONCENTRATIONS OF POLLUTANTS DIGITAL MOTOR LOW POWER - HIGH FLOW RATE MAGNETIC TILT ADJUSTABLE SUCTION HOOD 2.5MTR POWER CABLE WHEEL MOUNTED	FOR HIGHER CONCENTRATIONS OF POLLUTANTS HIGH PERFORMANCE CENTRIFUGAL FAN SOUNDPROOF CABINET SMALL FOOTPRINT LOCKABLE CASTORS	FOR HIGHER CONCENTRATIONS OF POLLUTANTS HIGH PERFORMANCE CENTRIFUGAL FAN SOUNDPROOF CABINET SELF INSTALLATION	FOR HIGHER CONCENTRATIONS OF POLLUTANTS HIGH PERFORMANCE CENTRIFUGAL FAN SOUNDPROOF CABINET SELF INSTALLATION

WHEEL MOUNTED

05800

05813







Item No	DESCRIPTION	DIMENSIONS
02862	SIP Front Cover Lens True Colour (for 02883)	118 x 95mm
02895	SIP Back Cover Lens (for 02883)	103 x 47mm
02897	SIP Front Cover Lens (for 02884, 02886)	134 x 114mm
02898	SIP Back Cover Lens (for 02884, 02886)	105 x 66mm
02804	SIP Front Cover Lens (for 02803)	338.9 x 155.7mm
02805	SIP Back Cover Lens (for 02803)	103.5 x 88.6mm



SIP MIG TORCHES



Item No	DESCRIPTION
05502	SIP 15 3mtr Euro MIG Welding Torch
05505	SIP 25 3mtr Euro MIG Welding Torch
05510	SIP 25 4mtr Euro MIG Welding Torch
05515	SIP 36 4mtr Euro MIG Welding Torch

Heavy-duty welding torches for use with MIG welders

SIP TIG TORCHES



Item No	DESCRIPTION
05029	SIP 17V Small Cable Plug TIG Welding Torch
05018	SIP 17 4mtr 3-Pin TIG Welding Torch
05015	SIP 26 4mtr 5-Pin TIG Welding Torch
05016	SIP 26 4mtr 3-Pin TIG Welding Torch

SIP PLASMA TORCHES



Hard-wearing plasma torches for accurate and reliable metal cutting

Item No	DESCRIPTION
WE04-00177	SIP P80 Plasma Torch Pilot ARC
05123	SIP 6mtr P80 Plasma Torch without Connector

SIP ELECTRODE HOLDERS



Durable solutions suitable for demanding welding applications

Item No	DESCRIPTION
02744	SIP 400A Twist Electrode Holder
02715	SIP 300A Electrode Holder
02700	SIP 200A Electrode Holder

SIP EARTH CLAMPS



ringin quality occorronality for domainating from the applications		
Item No	DESCRIPTION	
02743	SIP 400A Steel Earth Clamp	
02750	SIP 600A Cast Brass Earth Clamp	

SIP MAGNETIC WELDING EARTH CLAMP



Item No DESCRIPTION 04157 SIP Magnetic Earth Clamp 400A

SIP MAGNETIC WELDING TORCH HOLDERS



Item No	DESCRIPTION
04158	SIP Magnetic Welding Torch Holder MIG
04159	SIP Magnetic Welding Torch Holder TIG

SIP ARC/MMA WELDING ELECTRODES



SIP ARC/MMA WELDING ELECTRODES - BULK BOXES



High quality general purpose ARC/MMA electrodes Suitable for mild steel (E6013)

02689 SIP 6x 1.6mm, 5x 2mm, 4x 2.5mm

Item No	DESCRIPTION	
02769	SIP 1.6mm, Mild Steel (6013)	2kg
02921	SIP 2.0mm, Mild Steel (6013)	2.5kg
02777	SIP 2.5mm, Mild Steel (6013)	5kg
02778	SIP 3.25mm, Mild Steel (6013)	5kg
02779	SIP 4.0mm, Mild Steel (6013)	5kg

SIP SPOT WELDING ARMS & ELECTRODES



Easy-to-fit accessories are sold separately as individual parts or available as a bodywork kit

Item No	DESCRIPTION	
25418	SIP 120mm Arms with Straight Electrodes	ø 16mm
25417	120mm Arms with Offset Electrodes	ø 16mm
25419	350mm Arms with Offset Electrodes	ø 16mm
25415	350mm Restricted Access Arms with Offset Electrodes	ø 16mm
25416	120mm Arms with Swan Neck Electrodes	ø 16mm
25424	Spot Welder 5pc Bodywork Kit for 25298	ø 16mm
25413	120mm Arms with Straight Electrodes	ø 20mm
25412	120mm Arms with Offset Electrodes	ø 20mm
25414	350mm Arms with Offset Electrodes	ø 20mm
25410	350mm Restricted Access Arms with Offset Electrodes	ø 20mm
25411	120mm Arms with Swan Neck Electrodes	ø 20mm
25425	Spot Welder 5pc Bodywork Kit for 25299	ø 20mm

SIP MIG WELDING TORCH TIPS & SHROUDS



Item No	DESCRIPTION
04040	SIP 0.6mm Tips M5 (Pack of 5)
04045	SIP 0.8mm Tips M5 (Pack of 5)
04144	SIP 0.8mm Tips M6 (Pack of 5)
04142	SIP MB15 Conical MIG Shrouds (2 Per Pack)
04035	SIP Migmate MIG Shrouds (2 Per Card)

SIP MIG WELDING WIRE



Premium quality MIG wire for gas and gasless welding applications

Item No	DESCRIPTION	
04000	SIP Display 0.6mm Mild Steel (gas welding)	0.7kg
02666	SIP 0.6mm Mild Steel (gas welding)	5kg
02668	SIP 0.6mm Mild Steel (gas welding)	15kg
04005	SIP 0.8mm Mild Steel (gas welding)	0.7kg
02669	SIP 0.8mm Mild Steel (gas welding)	5kg
02671	SIP 0.8mm Mild Steel (gas welding)	15kg
02681	SIP 1.0mm Mild Steel (gas welding)	15kg
04060	SIP Display 0.8mm Aluminium (gas welding)	0.5kg
04065	SIP Display 0.8mm Stainless Steel (gas welding)	0.7kg
04055	SIP Display 0.8mm Flux Cored Mini (gasless welding)	0.227kg
04010	SIP Display 0.8mm Flux Cored (gasless welding)	0.45kg
02678	SIP 0.8mm Flux Cored (gasless welding)	0.90kg
02706	SIP 0.8mm Flux Cored (gasless welding)	4.5kg

SIP MIG WELDING GAS & GAS BOTTLE REGULATOR



Item No	DESCRIPTION	
04015	SIP Display CO₂ Gas	390g
04020	SIP Display Argon/CO₂ Gas	390g
04025	SIP Display Argon Gas	390g
04012	SIP Display CO₂ Gas	600g
04030	SIP Gas Regulator for disposable bottles	
0.000	on add nogalator for disposable bottles	



SIP WELDING BLANKET & CURTAIN



Item No	DESCRIPTION
04161	SIP Welding Blanket (2 x 1m)
04166	SIP Welding Curtain (6' x 6')
04167A	SIP Welding Curtain and Frame Package



Item No	DESCRIPTION
09531	SIP 4pc Flush Butt Welding Clamps
09532	SIP 4pc Contour & Flush Butt Welding Clamps
09533	SIP 4pc Adjustable Offset Butt Welding Clamps



Item No DESCRIPTION 07648 SIP 6" 274 Welders Angle Clamp 07649 SIP 9" 275 Welders Angle Clamp

SIP WELDING TABLE



Item No DESCRIPTION

05709 SIP Welding Table

SIP GENERAL WELDING ACCESSORIES



Item No	DESCRIPTION
04168	SIP MIG Pliers (5-in-1 tool)
04173	SIP Wire Brush - 3 Row (Mild Steel)
04174	SIP Wire Brush - 4 Row (Mild Steel)
04169	SIP Wire Brush - 3 Row (Stainless Steel)
04171	SIP Wire Brush - 4 Row (Stainless Steel)
04176	SIP Converging Wire Brush
02820	SIP Advanced Anti Spatter Spray - 400ml
02709	SIP Spring Handle Metal Chipping Hammer



Item No	DESCRIPTION
09550	SIP Magnetic Holder M Model holds up to 50lbs / 23kg
09552	SIP Magnetic Holder L Model holds up to 75lbs / 34kg
09530	SIP Welding Clamps (Set of 3)



WOODWORKING - SPINDLE MOULDER & MORTICERS





- 230v (13A) input supply
- Powerful 1500w (2hp) motor
- 9000rpm cutter block speed
- 252mm planer width
- · 920mm table length
- 90 135° fence tilt

THICKNESSING:

- · 5 120mm timber size thicknessing
- · 252mm max. timber width
- · 6.4mtr/min feed speed
- · 2mm max. depth of cut
- · 2.5mm max. cutting depth Fitted with dust extraction port and hood



- 230v (13A) input supplyPowerful 500w motor
- 0° to 45° disc workable tilt
- 100 x 914mm sanding belt, 200mm sanding disc

SIP 4"x 8" BELT/DISC SANDER



Supplied with 2 large aluminium adjustable sanding tables and one mitre guide for

increased accuracy

Dust extraction/collection



BUILT-IN DUST EXTRACTION



- 230v (13A) input supply
- 750w (1hp) brushless motor
- 150 x 1220mm (6" x 48") belt size
- 250mm (10") disc size
- 0° to 45° disc workable tilt
- · 0° to 90° belt tilt

SEE DUST **COLLECTORS*** PAGES 148-149

- · 2980rpm disc speed
- 470mtr/min belt speed
- Supplied with 2 adjustable sanding tables and mitre guide



- 230v (13A) input supply
- 305mm (12") disc size

Item No: 01558

· 1490rpm disc speed · Grit 60 sanding disc





WOODWORKING - LATHES

SIP 14"x 40" STARTER WOOD LATHE WITH 3PC CHISEL KIT

- 230v (13A) input supply
- 370w (0.5hp) motor
- 350mm maximum turning diameter
- 1000mm maximum turning between centres
- 720 2150rpm variable speed
- 3/4" x 16TPI spindle thread size
- · Revolving centre
- · Thermal cut-off switch










SIP CAST IRON WOOD LATHES



· Digital read-outs for accurate speed display

NVR SWITCH

13A 230v





DIGITAL DISPLAY FOR SPEED READ-OUT (01936)







SIP 14"x



ITEM No.	01936	01938	01940
MODEL	SIP VARIABLE SPEED CAST IRON MIDI WOOD LATHE	SIP 12"x 36" SWIVEL HEAD Wood Lathe	SIP 14"x 43" SWIVEL HEAD WOOD LATHE
INPUT SUPPLY	230v (13A)	230v (13A)	230v (13A)
MOTOR POWER	550w (0.75hp)	550w (0.75hp)	750w (1hp)
SPEED RANGE	500 - 3500rpm (variable)	500 - 2000rpm (variable)	500 - 2000rpm (variable)
MAX. DISTANCE BETWEEN CENTRES	432mm	900mm	1100mm
MAX. TURNING DIAMETER	305mm	300mm	350mm
SPINDLE THREAD SIZE	3/4" x 16TPI	3⁄4" x 16TPI	3⁄4" x 16TPI
WEIGHT	32kg	77kg	130kg
ADDITIONAL FEATURES	-	-	Cast iron leg stand included

01940

SIP PREMIUM 10" WOOD BANDSAW

- Solid cast steel table for accurate cutting - 350 x 330mm
- 0° 45° table tilt
- · Steel frame construction
- 230v (13A) input supply
- Powerful 370w (0.5hp) motor
- 245mm throat width
- 100mm max. cutting height
- 1750mm blade length

- 6 13mm blade width
- 1 speed 13mtr/sec
- · Fully adjustable blade tensioning
- Integrated rip fence and bearing guide
- · Mitre gauge
- 100mm dust extraction outlet
- · Magnetic NVR switch

SIP PROFESSIONAL 12" WOOD BANDSAW

- Solid cast steel table for accurate cutting - 400 x 500mm
- 0° 45° table tilt
- · Steel frame construction
- 230v (13A) input supply
- Powerful 750w (1hp) motor
- 300mm throat width
- 175mm max. cutting height

- 6 15mm blade width
- 2 speed 6mtr/sec, 12mtr/sec
- · Fully adjustable blade tensioning · Integrated rip fence and bearing guide
- Mitre gauge
- 100mm dust extraction outlet
- · Magnetic NVR switch





- Designed to position and manoeuvre woodworking machines around the workshop

· Ideal for environments requiring added workspace flexibility

Item No: 06920



- Compatible with: 01332, 01444, 01445, 01446 & 01456



SIP PROFESSIONAL 14" WOOD BANDSAW HEAVY-DUTY

- Large 535 x 435mm solid cast steel table
- 0° 45° table tilt
- 230v (13A) input supply
- Powerful 1500w (2hp) motor
- 355mm throat width
- 235mm max. cutting height
- 2750mm blade length
- 6 25mm blade width
- 2 speeds 8mtr/sec, 14mtr/sec
- · Rack and pinion rise and fall
- · Fully adjustable blade tensioning
- Integrated rip fence with bearing guide
- · Heavy-duty cast mitre fence
- Cast mitre gauge
- · Dust extraction
- Magnetic NVR switch
- Stand included

SIP PROFESSIONAL 16" WOOD BANDSAW HEAVY-DUTY

- Large 535 x 435mm solid cast steel table
- 0° 45° table tilt
- 230v (13A) input supply
- Powerful 2200w (3hp) motor
- 405mm throat width
- · 254mm max. cutting height
- 3345mm blade length
- 10 25mm blade width
- 2 speeds 7mtr/sec, 14mtr/sec
- · Rack and pinion rise and fall
- · Fully adjustable blade tensioning
- Integrated rip fence with bearing guide

BLADE

- · Heavy-duty cast mitre fence
- Cast mitre gauge
- · Dust extraction
- · Magnetic NVR switch







SOLID CAST STEEL TABLE INCLUDED



RIP FENCE WITH BEARING GUIDE







STAND INCLUDED

RIP FENCE WITH BEARING GUIDE



SIP 12" SLIDING COMPOUND MITRE SAW with Laser

- Input voltage: 230v (13A) Heavy-duty, high torque 1.8kW (2.4hp) motor
- Belt-drive for powerful and smooth performance Sliding action for extended range
- · Laser for greater cutting accuracy
- · Adjustable depth stop tenoning and trenching tasks
- · Dust collection bag
- No load blade speed: 3800rpm
- High quality Ø 305mm x 30mm bore x 40TCT saw blade
- Mitre Table Angles: -45 $^{\circ}$ / 0 $^{\circ}$ / +45 $^{\circ}$
- Bevel Angles: Up to 45° (Left and Right)
- · Cutting Capacity:



SIP 2-IN-1 TABLE SAW with INTEGRATED

Eliminate sawdust from indoor woodcutting tasks. An innovation for professionals working in domestic or commercial premises, the 2-in-1 Table Saw features an integrated dust extractor which collects up to 95% of the sawdust it creates.

- 1200w (motor) / 1000w (extractor) power
- 165mm Ø, 5300rpm TCT blade delivers max. capacity of 40mm at 90°
- Adjustable tilting blade for angled capacity of 24mm @ 45° (left)
- 550 x 475mm (standard) and 550 x 650mm (extended) aluminium cutting table for wider workpieces





TIGREN 12" CONTRACTOR SAW

A powerful saw with versatile 0° to 45° tilting and large worktable size to help provide accurate cutting in a range of applications, manufactured from heavy-duty coated steel with tough powder-coated legs, plus wheels and integrated lift handles for positioning.

Perfect for tradespeople, contractors and home enthusiasts.

- 230v (13A) input supply
- 2200w @ S6 40% 5 mins (230v) motor
- 0°- 45° tilting with cutting capacity up to 83mm @ 0° / 58mm @ 45°
- 800 x 550mm worktable, extendable up to 1600mm x 550mm for versatility
- Supplied with rip fence, mitre gauge, push stick, pad and hose
- Ø315 x Ø30mm (24T) blade












100MM Ø DUST EXTRACTION OUTLET

10" TCT BLADE SUPPLIED AS STANDARD

QUICK ADJUST RIP FENCE WITH 'QUICK-LOCK' MICRO ADJUST



- 230v (16A) input supply
- Powerful 2200w (3hp) induction motor
- Accurate 0° 45° arbour with blade lock
- Fine adjustment saw blade rise and fall with lock
- (1170 x 800mm with supplied extensions)
- 10" TCT blade supplied as standard
- 'T' slotted heavy-duty cast mitre guide and push stick included
- Quick adjust rip fence with 'Quick-lock' micro adjust
- 100mm Ø dust extraction outlet
- · Cabinet stand included





OPTIONAL

SIP SLIDING CARRIAGE
For 10" Cast Iron Table Saw

New No: 01495





SIP SINGLE ROLLER STAND

- 80kg load capacity
- Precision-made, fully adjustable single roller
- 400mm roller length
- 700 1100mm adjustable height



SIP ADJUSTABLE V-TYPE ROLLER BALL STAND

0

100KG

CAPACITY

- 100kg load capacity
- 2 sets of 4 rollers
- Each roller set tilts and locks at 45° independently
- 700 1150mm fully adjustable height



Item No: 01383

SIP HEAVY-DUTY 5 ROLLER STAND

- 100kg load capacity
- 5 rollers
- 680 to 1150mm fully adjustable height
- 57mm roller diameter
- · 450mm roller length



SIP ADJUSTABLE ROLLER STAND TABLE

Built for metalwork and woodworking workshops, this versatile roller table has a high 400kg capacity and features a rigid and sturdy steel construction, designed to withstand day-to-day use in professional environments.

- Extends cutting & sawing area capacity
- Modular tables connect for processing larger workpieces
- Compatible with SIP woodworking table saws & bandsaw: 01480, 01332, 01446, & 01445

SEE PAGE 108 for more details

Item No: 01395







SIP BEECH WORKBENCH

- High-quality beech construction
- (L)1350mm x (W)620mm x (H)900mm
- · Integrated waist-high storage drawer
- 2 x integral wooden vices
- 4x metal workpiece holding pegs
- · Low-level, full-length storage shelf

Item No: 01443





Item No	01923	01963	01968	01969	01954	01956
MODEL	SIP 50LTR DUST & CHIP COLLECTOR	SIP 1HP PORTABLE SINGLE BAG DUST COLLECTOR	SIP SINGLE BAG DUST COLLECTOR c/w FLOOR ATTACHMENT	SIP 1HP SINGLE BAG DUST COLLECTOR c/w FLOOR ATTACHMENT	SIP 2HP SINGLE BAG DUST COLLECTOR	SIP 3HP DOUBLE BAG DUST COLLECTOR
INPUT SUPPLY	230v (13A)	230v (13A)	230v (13A)	230v (13A)	230v (13A)	230v (13A)
MOTOR TYPE	1100w (brushed)	750w (brushless induction)	550w (brushless induction)	750w (brushless induction)	1500w (brushless induction)	2200w (brushless induction)
MAX. AIR FLOW VOLUME	183mtr³/hr	850mtr³/hr	1200mtr³/hr	850mtr³/hr	2500mtr³/hr	3900mtr³/hr
FAN DIAMETER	80mm	230mm	230mm	230mm	300mm	305mm
CAPACITY	50ltr	56ltr	57ltr	57ltr	153ltr	2x 153ltr
INLET DIAMETER	100mm	100mm	100mm	100mm	1x 125mm or 2x 100mm	1x 150mm or 3x 100mm
FILTRATION	0.5 micron (cartridge)	5 micron (bag)	5 micron (bag)	5 micron (bag)	5 micron (bag)	2x 5 micron (bag)
ADDITIONAL Features	5 PIECE ADAPTOR 2mtr HOSE CARTRIDGE AND PAPER BAG FILTRATION	COMPACT WHEEL-MOUNTED CHASSIS 4X CASTOR WHEELS	WHEEL-MOUNTED FLOOR VACUUM ATTACHMENT HOSE EXTRACTION	WHEEL-MOUNTED FLOOR VACUUM ATTACHMENT HOSE EXTRACTION	WHEEL-MOUNTED TWIN INLET ADAPTOR RUN TWO MACHINES WITH ONE COLLECTOR	WHEEL-MOUNTED TRIPLE INLET ADAPTOR RUN THREE MACHINES WITH ONE COLLECTOR





WOODWORKING - DUST EXTRACTION



Item No	01964	01990	01992	01994
MODEL	SIP 1HP WALL-MOUNTED SINGLE CARTRIDGE DUST COLLECTOR	SIP 1HP SINGLE CARTRIDGE DUST COLLECTOR c/w FLOOR ATTACHMENT PACKAGE	SIP 2HP SINGLE CARTRIDGE DUST COLLECTOR PACKAGE	SIP 3HP DOUBLE CARTRIDGE DUST COLLECTOR PACKAGE
INPUT SUPPLY	230v (13A)	230v (13A)	230v (13A)	230v (16A)
MOTOR TYPE	750w (brushless induction)	750w (brushless induction)	1500w (brushless induction)	2200w (brushless induction)
MAX. AIR FLOW VOLUME	850mtr³/hr	850mtr³/hr	2500mtr³/hr	3900mtr³/hr
FAN DIAMETER	230mm	230mm	300mm	305mm
CAPACITY	56ltr	57ltr	153ltr	2x 153ltr
INLET DIAMETER	100mm	100mm	1x 125mm or 2x 100mm	1x 150mm or 3x 100mm
FILTRATION	1 micron (cartridge)	c/w 1 micron (cartridge 62605)	c/w 1 micron (cartridge 62606)	c/w 2x 1 micron (cartridges 62606)
ADDITIONAL Features	WALL-MOUNTED HIGH FILTRATION FOR FINE PARTICLES INCLUDING MDF	WHEEL-MOUNTED HIGH FILTRATION FOR FINE PARTICLES INCLUDING MDF FLOOR VACUUM ATTACHMENT	WHEEL-MOUNTED HIGH FILTRATION FOR FINE PARTICLES INCLUDING MDF TWIN INLET ADAPTOR RUN TWO MACHINES WITH ONE COLLECTOR	WHEEL-MOUNTED HIGH FILTRATION FOR FINE PARTICLES INCLUDING MDF TRIPLE INLET ADAPTOR RUN THREE MACHINES WITH ONE COLLECTOR

WOODWORKING - ACCESSORIES

SIP WOODWORKING - REPLACEMENT BLADES

Item No	DESCRIPTION	
06925	SIP 2750mm x 6mm x 0.25mm 6TPI Bandsaw Blade (for 01444)	
06927	SIP 2750mm x 19mm x 0.80mm 6TPI Bandsaw Blade (for 01444)	
06930	SIP 2750mm x 12mm x 0.65mm 6TPI Bandsaw Blade (for 01444)	
06931	SIP 2750mm x 25mm x 0.9mm 4TPI Bandsaw Blade (for 01444)	
06932	SIP 3345mm x 13mm x 0.65mm 6TPI Bandsaw Blade (for 01445)	
06933	SIP 3345mm x 25mm x 0.9mm 4TPI Bandsaw Blade (for 01445)	
09430	SIP 3345mm x 20mm x 0.8mm 6TPI Bandsaw Blade (for 01445)	
09440	SIP 1750mm x 6.3mm x 0.35mm 6TPI Bandsaw Blade (for 01475)	· saa
09442	SIP 1750mm x 9.5mm x 0.35mm 6TPI Bandsaw Blade (for 01475)	SiD
09444	SIP 1750mm x 12.7mm x 0.52mm 4TPI Bandsaw Blade (for 01475)	WOOD CUTTING
09446	SIP 2240mm x 6.3mm x 0.35mm 6TPI Bandsaw Blade (for 01477)	Positive Hock Angle Positive Too Bevel
09448	SIP 2240mm x 9.5mm x 0.52mm 6TPI Bandsaw Blade (for 01477)	315x30T Max.4500
09450	SIP 2240mm x 12.7mm x 0.52mm 4TPI Bandsaw Blade (for 01477)	
WD01-02070	SIP 165mm x 20mm TCT (50T) Circular Saw Blade (for 01513)	
07773	SIP 254mm x 16mm TCT (40T) Circular Saw Blade (for 01511)	MOTIVE WHITEHOUS TO BE CUT
06184	SIP 254mm x 25.4mm TCT (40T) Circular Saw Blade (for 01332)	
06128	SIP 254mm x 30mm TCT (40T) Circular Saw Blade (for 01930, 01986)	11
06138	SIP 254mm x 30mm TCT (36T) Circular Saw Blade (for 01986)	
06122	SIP 305mm x 30mm TCT (40T) Circular Saw Blade (for 01504)	
06158	SIP 315mm x 30mm TCT (40T) Circular Saw Blade (for 01350, 01446)	
06849	SIP 10pc Assorted Scroll Saw Blades (for 01928, 01947)	
WD01-01445	SIP 8" Planer Blade (for 01557)	
WD01-01581	SIP 10" Planer Blades (for 01558)	

SIP WOODWORKING - GENERAL ACCESSORIES



PRODUCTSpatlight

SIP RESCUE PAC 3000

03937

SIP 3" DIESEL WATER PUMP

09409

SIP 8 TON PETROL LOG SPLITTER



- ✓ ICONIC rechargeable **AGM** booster
- ✓ 3000A boost peak rate
- ✔ Boosts vehicle batteries from motorcycles to tractors

PAGE 55



- ✓ Easy electric start
- ✓ High 1,000ltr/min flow rate
- ✓ Wheels & folding handles for maximum poratbility

PAGE 115

- ✔ Powerful 6.5HP engine & 8Ton splitting force!
- 520mm log splitting length!
- ✓ Versatile all-terrain tyres

PAGE 95



PRIZE BUNDLE INCLUDES:

- 1x SIP Rescue Pac 1600 (03936)
- 1x SIP ISG1101 Digital Inverter Generator (25400)
- 1x SIP QT AIR DD 1.5HP 24ltr
- Ultra Low Noise Compressor (05491)
- 1x SIP FIREBALL Turbofan 2000 Electric Fan Heater (09128)
- 1x SIP Universal Free standing Heater (09588)
- 1x SIP Calibrated Tyre Inflator (02169)











NEW QTULTRA LOW NOISE COMPRESSOR RANGE SEE PAGES 12-13





















SIP (INDUSTRIAL PRODUCTS) LIMITED Gelders Hall Road, Shepshed, Loughborough, Leicestershire LE12 9NH. UK



ALL SIP MACHINES COME WITH

